
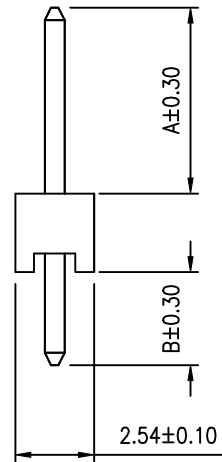



REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

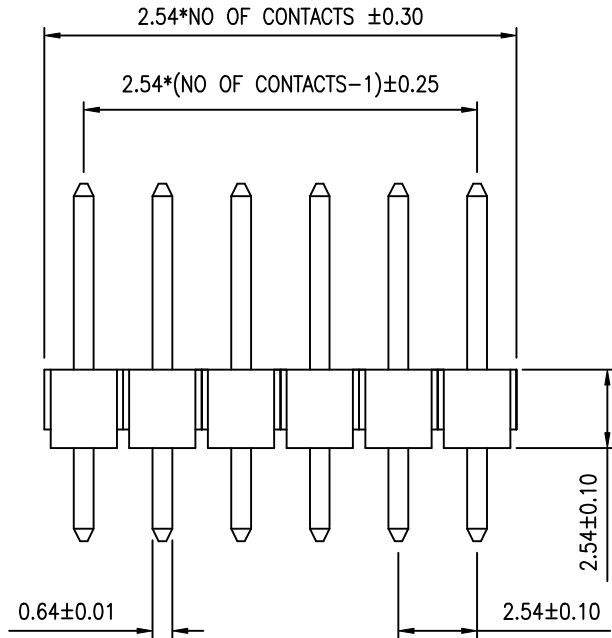

SPECIFICATION

- * Current Rating:
3 A
- * Withstanding Voltage:
800 VAC (1 min.)
- * Insulation Resistance:
1000 Megohms min.
- * Contact Resistance:
30 Milliohms max.
- * Operating Temperature:
-40°C to +85°C
- * RETENTION FORCE
750g MIN.

ORDER INFORMATION

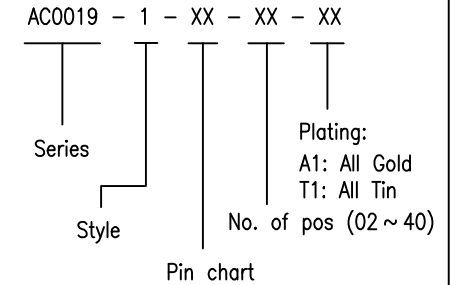


MATERIAL

- * Contact: Brass ,
0.64mm square post
- * Insulator: PBT & 30% G.F.
- * Plating: Gold

Pin Chart

Pin	A	B	Pin	A	B
01	6.00	3.00	05	11.00	3.00
02	6.20	3.10	06	0.30	5.80
03	6.00	3.30	07	14.00	3.30
04	12.96	3.00	08	24.60	2.30

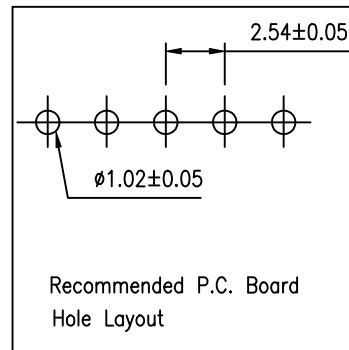

TECHWIN OPTO-ELECTRONICS CO., LTD.

0.0±	SCALE: 4:1	TITLE:	PART NO:
0.00±	UNIT: MM	2.54MM (.100") Center Pin HEADER Single Row	APP BY:
0.000±		MATL: PBT + 30% GF	CHK BY:
		DWG. NO. A201A	DR BY: 張金枝