

Kingbright Electronic Co., Ltd.



Mail Address: P. O. Box 81-153 Taipei, Taiwan
 Telex No. : 22249 TWNKIN


Fax: (886) 2 716 2041
 Telephones : 715-2848 • 713-0682

1.9 X 3.9MM RECTANGULAR LED LAMP

L-144

UNIT: MM

TOLERANCE: ±0.2

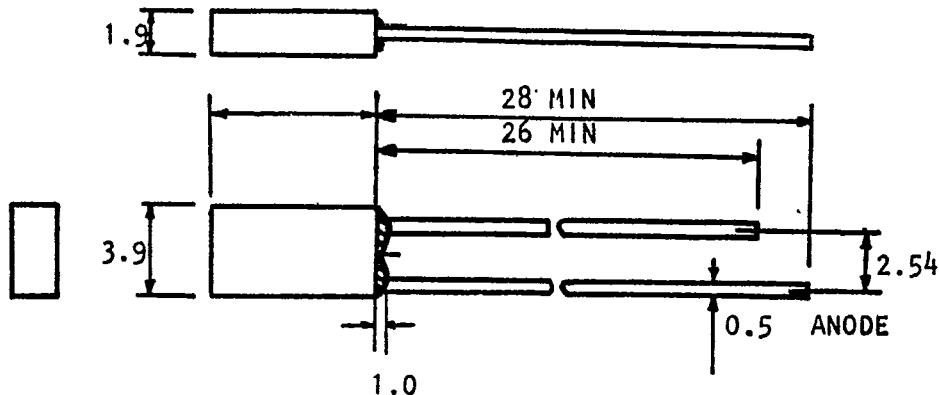

✓ - New

SELECTION GUIDE

| PART NO. | SOURCE (DICE) | LENSE TYPE (RESIN) | AXIAL LUMINOUS INTENSITY IN MCD @ 20mA | | VIEWING ANGLE |
|-----------|--------------------------------|--------------------|--|-----|---------------|
| | | | MIN | TYP | |
| ✓ L-144HD | RED HIGH EFFICIENCY (GaP) | Red Diffused | 0.8 | 1.2 | 70° |
| ✓ L-144ID | RED HIGH INTENSITY (GaAsP/GaP) | Red Diffused | 1.2 | 2.0 | 70° |
| ✓ L-144GD | GREEN (GaP) | Green Diffused | 0.8 | 1.0 | 70° |
| ✓ L-144YD | YELLOW (GaAsP/GaP) | Yellow Diffused | 1.0 | 1.4 | 70° |
| ✓ L-144ED | ORANGE (GaAsP/GaP) | Orange Diffused | 1.2 | 2.0 | 70° |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |