



TSF-110-02-T-D



TSF-126-02-T-S

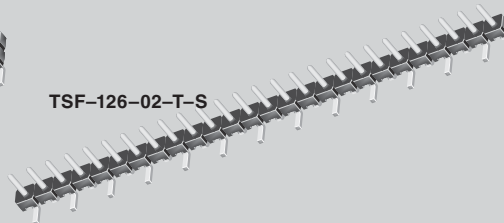

(2,54 mm) .100"

TSF SERIES

SMT TERMINAL STRIPS


Mates with:
SS, SD, HSS, SL, SDL,
ESS, ESD

SPECIFICATIONS


For complete specifications and recommended PCB layouts see www.samtec.com?TSF

Insulator Material:
Black Liquid Crystal Polymer
Flammability Rating:
UL 94V-O
Insulation Resistance:
5000 MΩ
Operating Temp Range:
-55°C to +105°C with Tin;
-55°C to +125°C with Gold
Dielectric Withstanding Voltage:
600 VAC
Terminal Material:
Phosphor Bronze
Plating:
Au or Sn over
50μ" (1,27 mm) Ni
RoHS Compliant:
Yes


Processing:
Lead-Free Solderable:
Wave, or reflow with Matte Sn
Lead Coplanarity:
.006" (0,15 mm) max (2-22)
.008" (0,20 mm) max (23-29)
.010" (0,25 mm) max (30-36)

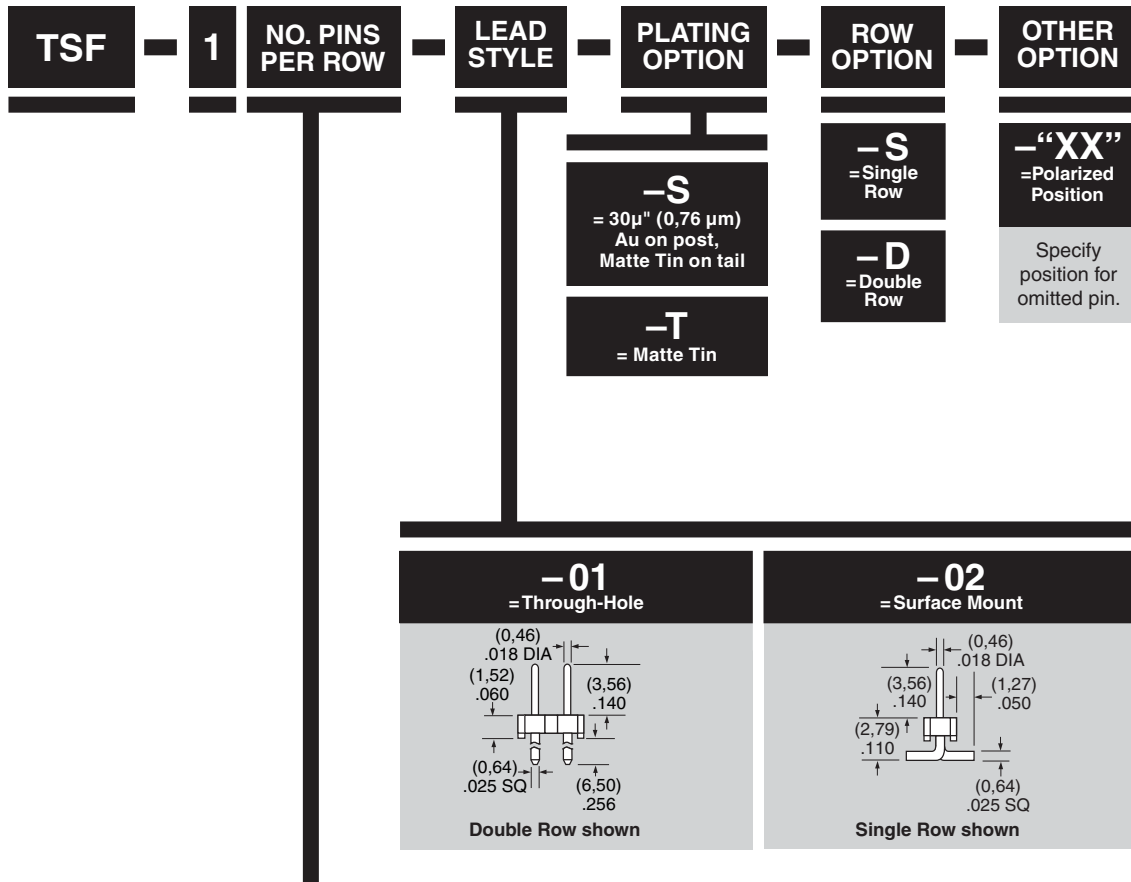

APPLICATIONS



02 thru 36

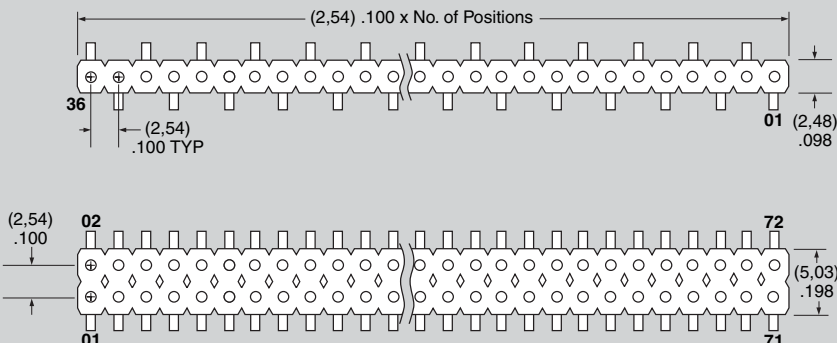

Note:
Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM