



## 2.5mm Wafer Right Angle / Straight Type

### Specifications

Current Rating: 3A AC,DC  
 Voltage Rating: 500V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 100MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Terminal: Brass / Tin Plated  
 Material: Nylon 66,UL94V-0




Part No.	Dimensions	
	A	B
2504R-02TR-L	2.50	5.00
2504R-03TR-L	5.00	7.50
2504R-04TR-L	7.50	10.00
2504R-05TR-L	10.00	12.50
2504R-06TR-L	12.50	15.00
2504R-07TR-L	15.00	17.50
2504R-08TR-L	17.50	20.00
2504R-09TR-L	20.00	22.50
2504R-10TR-L	22.50	25.00
2504R-11TR-L	25.00	27.50
2504R-12TR-L	27.50	30.00
2504R-13TR-L	30.00	32.50
2504R-14TR-L	32.50	35.00
2504R-15TR-L	35.00	37.50

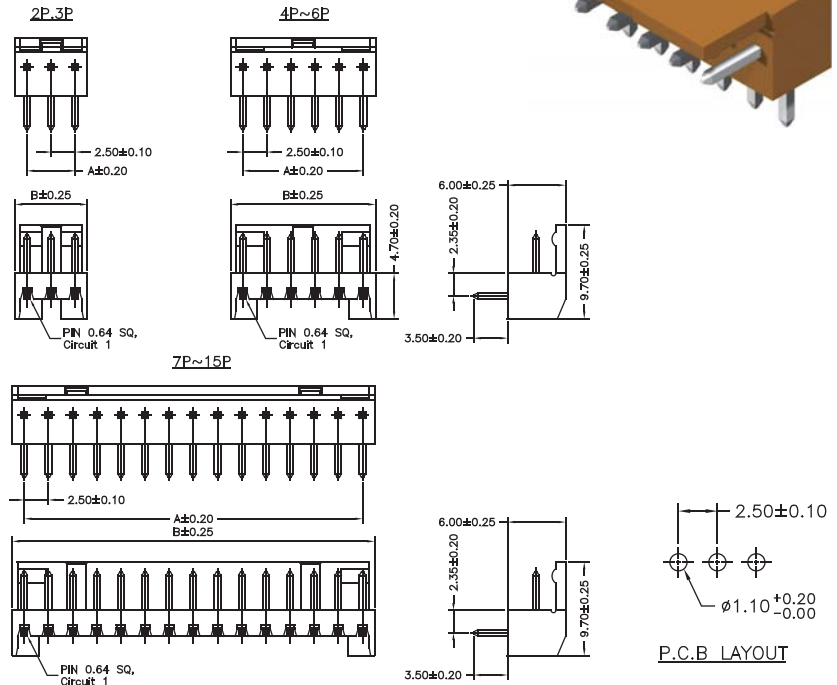


**Part No.:2504R-XXTR-L**

### Specifications

Current Rating: 3A AC,DC  
 Voltage Rating: 500V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 100MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Terminal: Brass / Tin Plated  
 Material: Nylon 66,UL94V-0



Part No.	Dimensions	
	A	B
2504S-02TR-L	2.50	5.00
2504S-03TR-L	5.00	7.50
2504S-04TR-L	7.50	10.00
2504S-05TR-L	10.00	12.50
2504S-06TR-L	12.50	15.00
2504S-07TR-L	15.00	17.50
2504S-08TR-L	17.50	20.00
2504S-09TR-L	20.00	22.50
2504S-10TR-L	22.50	25.00
2504S-11TR-L	25.00	27.50
2504S-12TR-L	27.50	30.00
2504S-13TR-L	30.00	32.50
2504S-14TR-L	32.50	35.00
2504S-15TR-L	35.00	37.50

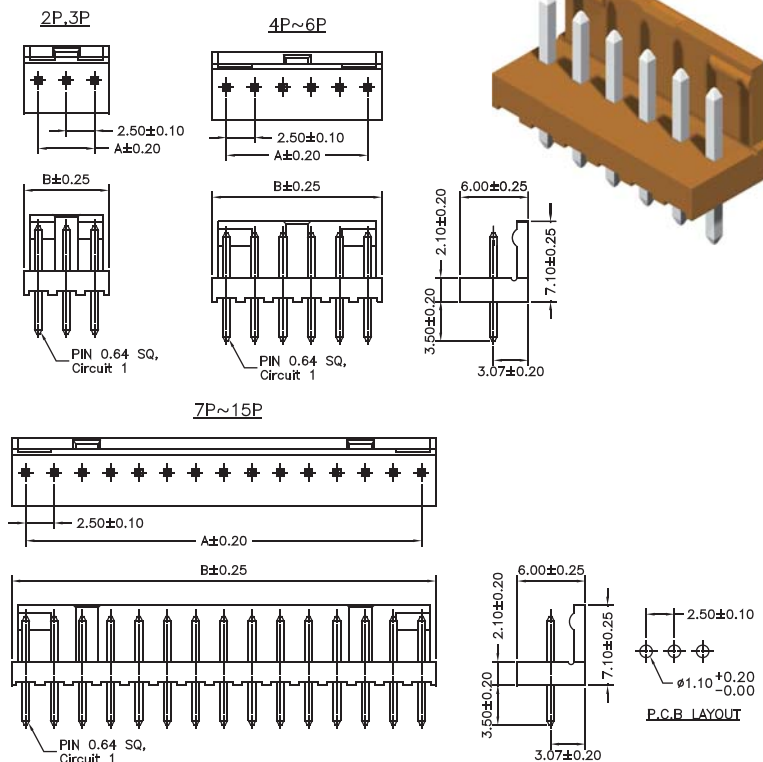

**Part No.:2504S-XXTR-L**