


Pin header straight & right angle type HE13/HE14 1 row pin \square 0.64 mm




Product specifications

Current rating : 3.0 A
 Dielectric withstanding voltage : 1000 Volts AC during 1 mn
 Insulation resistance : > 5000 M Ω
 Contact resistance : < 10 m Ω
 Operating temperature : -55°C to +125°C
 Max processing temperature : 260°C during 5 sec
 Contact : brass
 Plating : nickel/gold or nickel/tin
 Insulator : nylon-6T, UL94V-0

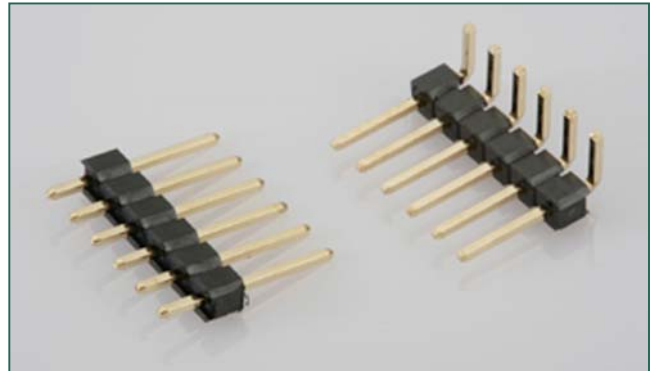

Mates with

Female headers \square 0.64 mm

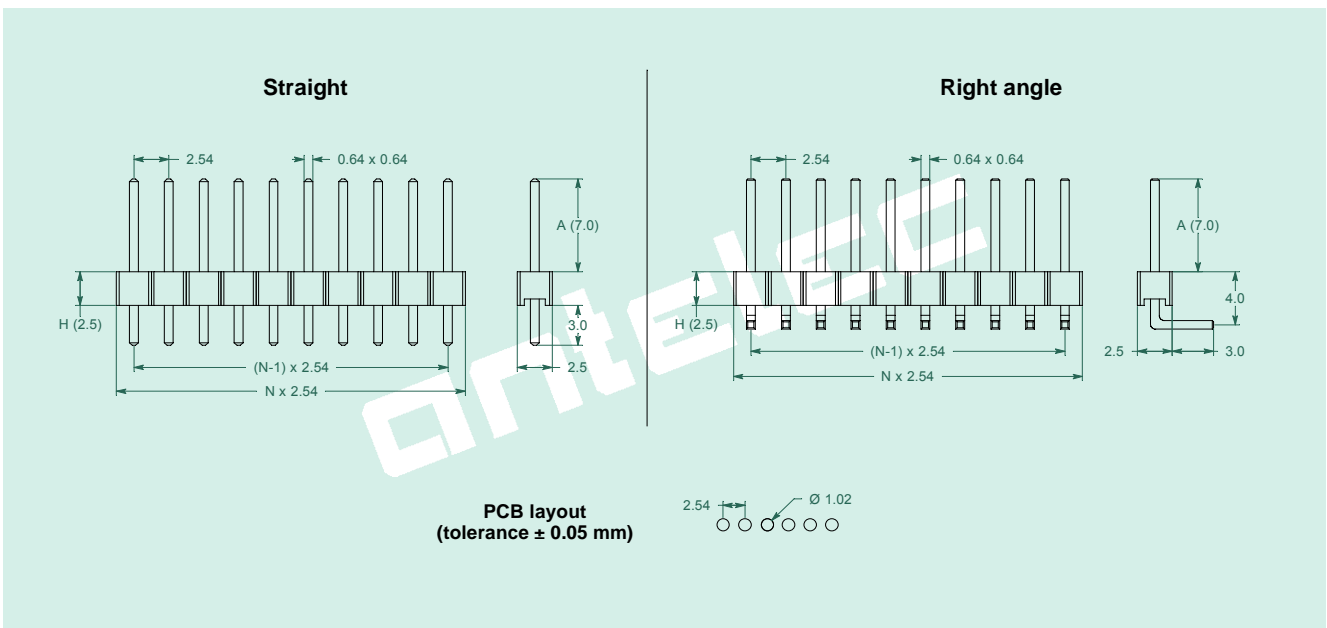

Create your part number

A60		254	XX	7	T	
Antelec 1 row	Straight or C for right angle	Pitch 2.54 mm	Total number of contacts	Height A = 7 mm (other lengths on request)	Tin or G for Gold or T/G for Selective (Straight version only)	Empty for insulator height H = 2.5 mm (standard) or H175 for H = 1.5 mm or H17 for H = 1.7 mm

Product range

Number of pins :
 1 row : 1 to 40 pins