




CUSTOMER COPY

ORDER INFORMATION

184 08 XX XX X

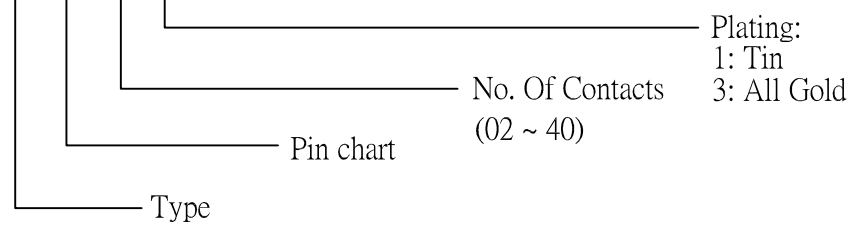

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

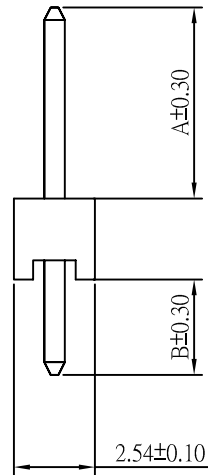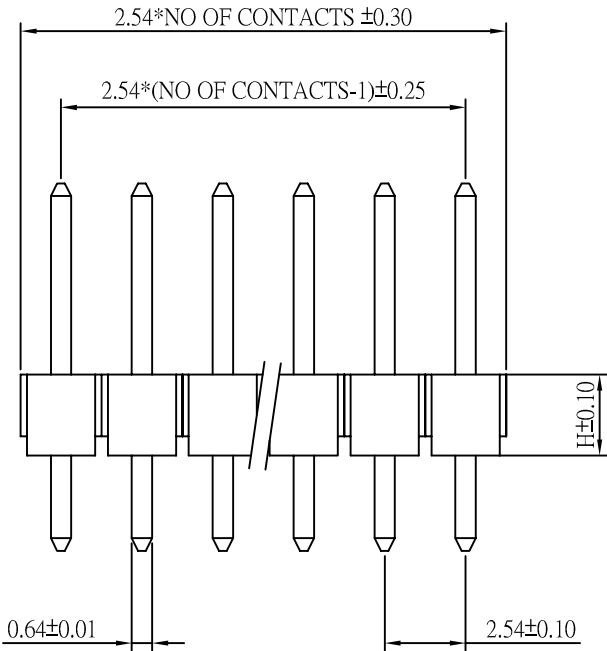

MATERIAL

- \* Contact: Brass , 0.64mm square post
- \* Insulator: High temperature plastic
- \* Plating: Gold

SPECIFICATION

- \* Current Rating: 3 A
- \* Withstanding Voltage: 800 VAC ( 1 min. )
- \* Insulation Resistance: 1000 Megohms min.
- \* Contact Resistance: 30 Milliohms max.
- \* Operating Temperature: -40°C to +85°C
- \* RETENTION FORCE 750g MIN.


Pin Chart

NO.	A	B	H
00	6.00	3.00	2.54
01	12.50	3.00	2.54
02	3.00	3.00	2.54
03	9.00	3.00	2.54
04	3.10	4.00	2.54
05	7.73	7.73	2.54
06	10.30	3.00	2.54
07	2.50	2.50	2.54
08	6.00	4.00	2.54
09	4.75	3.75	2.54

NO.	A	B	H
10	5.50	2.00	2.54
11	12.00	3.00	2.54
12	6.73	6.73	2.54
13	7.75	7.75	2.54
14	12.00	3.00	2.54
15	13.00	2.80	2.54
16	4.20	4.20	2.54
17	4.00	2.00	2.54
18	8.73	8.73	2.54
19	8.00	3.00	13.60

(低毒)

NO.	A	B	H
20	2.70	2.40	2.54
21	3.00	5.40	2.54
22	3.10	6.50	2.54
98	3.50	3.50	7.62
99	6.00	3.00	1.50

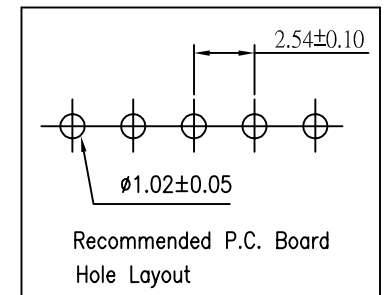

		<b>ACMELUX CO., LTD.</b> TEL:886-2-85124595 FAX:886-2-85124322		
		0.0±	SCALE:	TITLE:
0.00±	UNIT: MM	2.54MM (.100") Center Pin HEADER Single Row		APP BY:
0.000±				MATL:
		DWG. NO. C18408XXXXXX		DR BY: JACK LIN