

# A01d

## LOW PROFILE SHRUNK IDC SOCKET

PITCH: 2.54mm

### SPECIFICATIONS



#### Material

Insulator : PBT, glass reinforced, rated UL 94V-0  
Contact : Phosphor Bronze



#### Electrical

Current Rating : 1 Amp  
Contact Resistance : 30 mΩ max.  
Insulation Resistance : 3000 MΩ min.  
Dielectric Withstanding Voltage : 500V AC for 1minute  
Operating Temperature : -40°C to +105°C

- ◆ Terminated with L01-1.27mm pitch flat ribbon cable.
- ◆ Mating Suggestion : C88, C88a & C88b series.

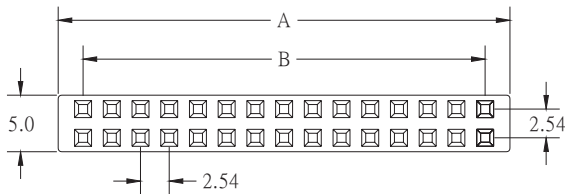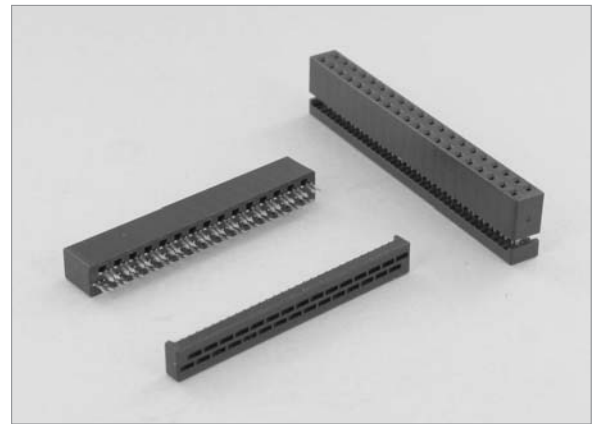

POSITION	A	B
6	9.48	5.08
8	12.02	7.62
10	14.56	10.16
12	17.10	12.70
14	19.64	15.24
16	22.18	17.78
20	27.26	22.86
24	32.34	27.94
26	34.88	30.48
30	39.96	35.56
34	45.04	40.64
40	52.66	48.26
50	65.36	60.96
60	78.06	73.66
64	83.14	78.74

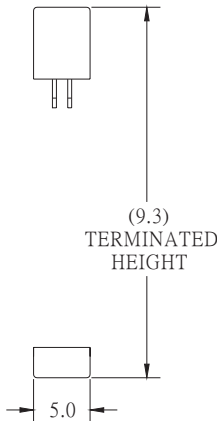

### HOW TO ORDER:

A01d -  1 -  2 -  3 -  4 -  5 - G (RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.SPECIAL FUNCTION	5.INSULATOR COLOR
06 08 10 12 14 16 20 24 26 30 34 40 50 60 64	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	D: W/O STRAIN RELIEF W/O BAR	1. BLACK