


PIN HEADER 2,54mm

ID: 339


STL 1-XXXXA / STL 2-XXXXA

Series 400



TECHNICAL DATA

Pitch	2,54 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	copper alloy
Rated Current	3 Amp.
Rated Voltage	250 V _{AC/DC}
Withstanding Voltage	1000 V _{AC} for one minute
Operating Temperature	-40°C to +105°C
Maximum Soldering Temperature	260°C for 10 seconds

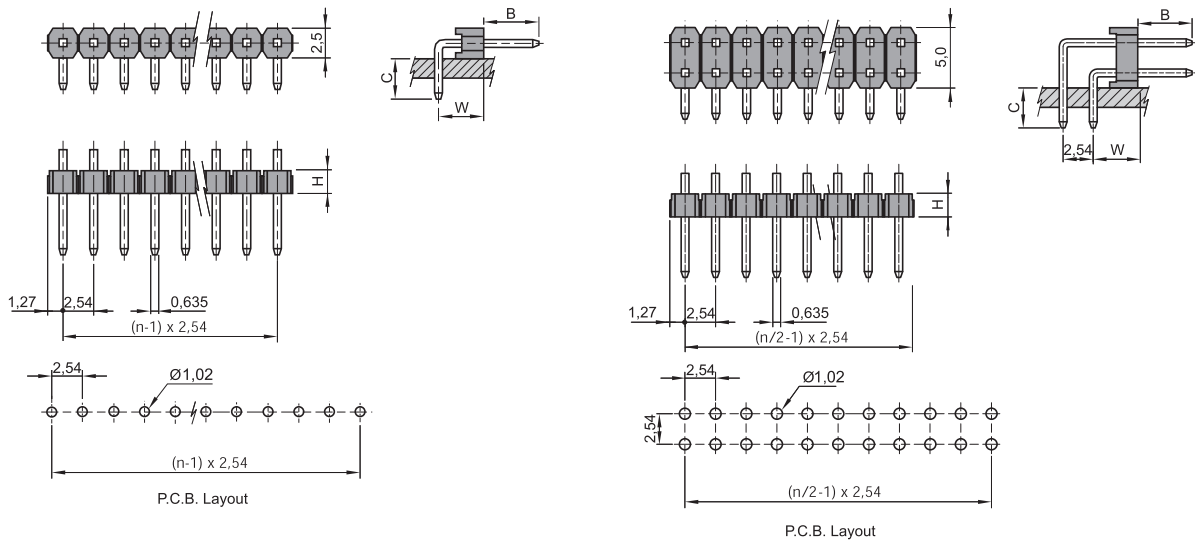

7 | 2,54 mm

Code	B	C	W
1080	3,50	3,30	3,20
1210	4,80	3,30	3,20
1340	6,10	3,30	3,20
1420	6,90	3,30	3,20
1720	9,90	3,30	3,20
1930	12,00	3,30	3,20
2110	13,80	3,30	3,20
2230	15,00	3,30	3,20
2440	17,10	3,30	3,20
Custom			

All dimensions in mm.
Other dimensions upon request.

