

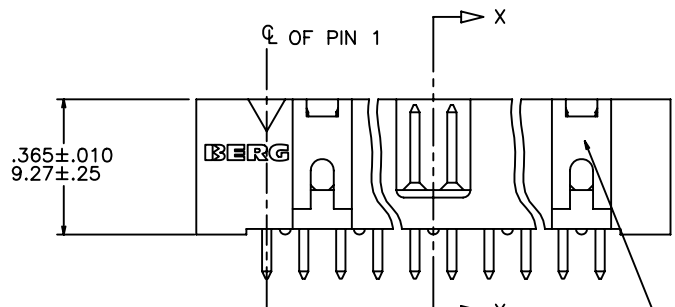


Tous droits strictement réservés. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de ©FCI. Droits de reproduction FCI.

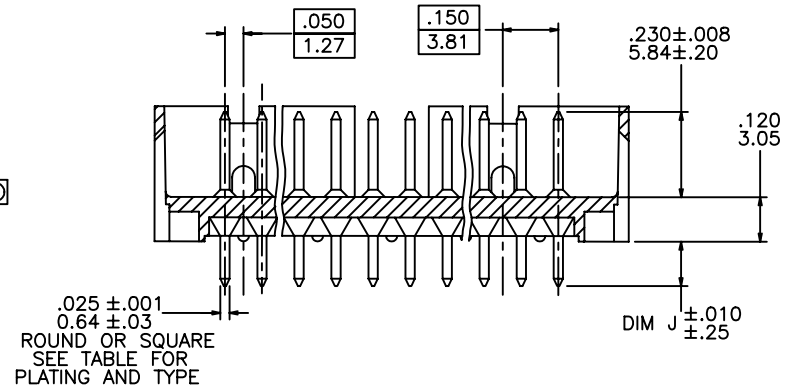

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of ©FCI. Copyright FCI.

PRODUCT NUMBER
SEE TABLE

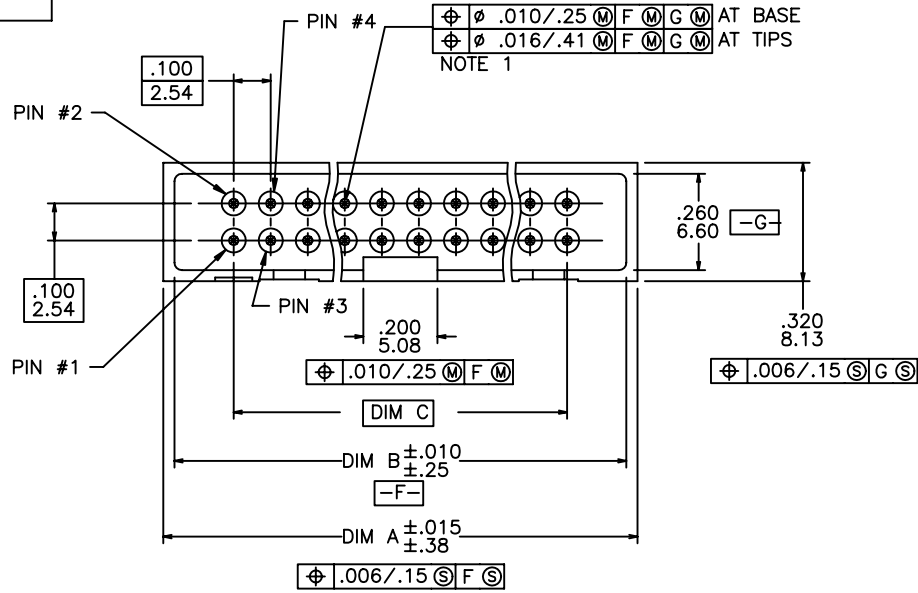

SEE SHEET 2 AND TABLES FOR POLARIZATION FEATURE ARRANGEMENT AND STYLE

SECTION Y-Y

SECTION X-X

| | | | | | | | | | | | |
|-------------------------------|----------|----|---------|--|---|--------------------|---|------------------|---|-------------------------------|----|
| mat'l. code NOTES 2, 5 & 6 | | | | tolerances unless otherwise specified | | | | CUSTOMER COPY | | www.fciconnect.com | |
| ltr | ecn no | dr | date | .XX±.01/X.XX±0.25 | | | | projection | | title | |
| H | N05-0123 | ZC | 5/9/05 | .XXX±.005/X.XXX±0.13 | | | | | | HEADER, QUICKIE, SLIM LINE | |
| J | N07-0151 | WG | 8/02/07 | .XXX±.0020/X.XXX±0.051 | | | | INCH/MM | | VERTICAL, 4-WALL | |
| | | | | angles 0° ±2° | | | | scale | | product family QKE. HDR. code | |
| | | | | dr | | M. CLOUSER 7/11/90 | | 2:1 | | size | |
| | | | | enr | | M. SMYK 7/11/90 | | A | | 88880 | |
| | | | | chr | | M. SMYK 8/21/91 | | | | sheet | |
| | | | | appd | | M. SMYK 8/21/91 | | | | 1 of 10 | |
| sheet | revision | J | J | J | J | J | J | J | J | cage code | |
| index | sheet | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |

1 | 2

3


4

PRODUCT NUMBER
SEE TABLE


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Droits de reproduction FCI. Propriete de ©FCI.




All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Copyright FCI. Property of ©FCI

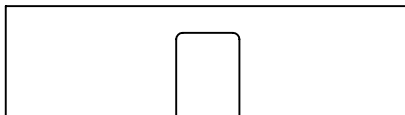


2 X 5
STYLE A

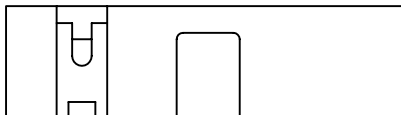

2 X 7
STYLE C

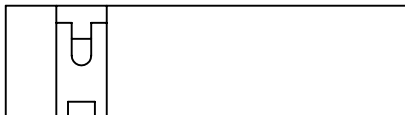


2 X 5
STYLE B

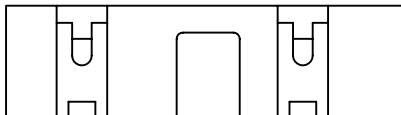

2 X 8 THUR 2 X 30
STYLE D

NOTES:

- ① SAME POSITION TOLERANCE APPLIES TO BOTH ENDS OF PINS.
- ② MOLDING MATERIAL: GLASS-FILLED POLYESTER, FLAME RETARDANT PER UL 94 V-0, COLOR: BLUE.
3. 1° MAX. DRAFT PERMISSIBLE ON ALL SURFACES.
4. 4 LBS. /1.8 KG MIN. TERMINAL PULL-OUT FORCE.
- ⑤ TERMINAL MATERIAL: PHOSPHORUS BRONZE.
- ⑥ MOLDING MATERIAL: GLASS FILLED POLYESTER, FLAME RETARDANT PER UL 94V-0, COLOR - BLACK.
- ⑦ MOLDING MATERIAL: GLASS FILLED POLYESTER, FLAME RETARDANT PER UL 94V-0, COLOR - GREY.
- ⑧ PART NUMBERS WITH "R" FOLLOWING THE PART NUMBER (EXAMPLE 88880-326 R) HAS RETENTION. (ONLY PARTS WITH .105, .120, AND .150 ROUND OR SQUARE TAILS CAN HAVE RETENTION.) LOCATION IS MANUFACTURES OPTION.
FOR ROUND PIN CONNECTORS:
15 LBS MAX INSERTION AND .25 LB MIN RETENTION FORCE WHEN USED IN .035±.003 DIA HOLES AND .062/1.57 THICK PC BOARD.
FOR SQUARE PIN CONNECTORS:
15 LBS MAX INSERTION AND .5 LB MIN RETENTION FORCE WHEN USED IN .040±.003 DIA HOLES AND .062/1.57 THICK PC BOARD.
- ⑨ PART NUMBERS WITH "T" FOLLOWING PART NUMBER (EXAMPLE 88880-068 T IS PACKED IN TUBES.) (CALL PRODUCT MANAGER FOR AVAILABILITY.)
10. PIN REMOVED FOR POLARIZED PART.
11. FOR LEAD FREE P/N JUST ADD "LF" BELOW THE ORIGINAL P/N.
12. THE HOUSING OF XXXX-XYLF WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER PROCESS.
13. PLATING OPTION: MAYBE EITHER GOLD OR GXT PLATING AT MANUFACTURER' OPTION.

| | | | | | | | | | | |
|-------------|----------------|----|------|---------------------------------------|-------------------------|---|----------------------------|---------------------------|-------|------|
| mat'l. code | | | | tolerances unless otherwise specified | | CUSTOMER COPY | | FCI www.fciconnect.com | | |
| ltr | ecn no | dr | date | linear | .XX±.01/X.XX±0.25 | projection | title | | | |
| J | | | | | .XXX±.005/X.XXX±0.13 |  | HEADER, QUICKIE, SLIM LINE | | | |
| | | | | angles | .xxx±.0020/X.xxxx±0.051 | | VERTICAL, 4-WALL | | | |
| | | | | dr | 0° ±2' | INCH/MM | product family | QKE. HDR. | code | |
| | | | | enr | M. CLOUSER 7/11/90 | scale | size | dwg no | sheet | |
| | | | | chr | M. SMYK 7/11/90 | | 1:1 | A | 88880 | 2 of |
| | | | | appd | M. SMYK 8/21/91 | | | | | |
| sheet index | revision sheet | | | | | | | | | |

form no. 7530-001-103

1 | 2

PDM: Rev:J

STATUS: Released
cage code
26 Printed: Apr 12, 2011

B

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de ©FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of ©FCI. Copyright FCI.

| PRODUCT NO. NOTE 8 & 9 | SIZE | STYLE | DIM A | DIM B | DIM C | DIM J | PIN PLATING NOTE 13 | PIN TYPE | PLASTIC MATERIAL |
|---------------------------|--------|-------|-----------|-----------|-------------|------------|----------------------------------|----------|------------------|
| | | | | | | | | | |
| -002 | | | | | | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -003 | | | | | | .675/17.15 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -004 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -005 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -006 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -007 | 2 X 10 | D | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .105/2.67 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -008 | | | | | | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -009 | | | | | | .675/17.15 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -010 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -011 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -012 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -013 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | .105/2.67 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -014 | | | | | | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -015 | | | | | | .675/17.15 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -016 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -017 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -018 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -019 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .105/2.67 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -020 | | | | | | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -021 | | | | | | .675/17.15 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -022 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -023 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -024 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -025 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .105/2.67 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -026 | | | | | | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -027 | | | | | | .675/17.15 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -028 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -029 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -030 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -031 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .105/2.67 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -032 | | | | | | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -033 | | | | | | .675/17.15 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -034 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| 88880-035 | 2 X 25 | D | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .150/3.81 | 150u"/3.81u TIN | SQ | NOTE 2 |

| | | | | | | | | | |
|-------------|----------------|----|------|---------------------------------------|------------|---------------|-------|----------------------------|-------|
| mat'l. code | | | | tolerances unless otherwise specified | | CUSTOMER COPY | | FCI www.fciconnect.com | |
| ltr | ecr no | dr | date | .XX±.01/X.XX±0.25 | | projection | | title | |
| J | | | | .XXX±.005/X.XXX±0.13 | | INCH/MM | | HEADER, QUICKIE, SLIM LINE | |
| | | | | .XXX±.0020/X.XXX±0.051 | | scale | | VERTICAL, 4-WALL | |
| | | | | angles 0° ±2° | | 1:1 | | product family QKE. HDR. | |
| | | | | dr | M. CLOUSER | 7/11/90 | size | | code |
| | | | | enr | M. SMYK | 7/11/90 | 88880 | | sheet |
| | | | | chr | M. SMYK | 8/21/91 | 3 of | | |
| | | | | appd | M. SMYK | 8/21/91 | | | |
| sheet index | revision sheet | | | | | | | | |



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of ©FCI

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Droits de reproduction ©FCI.

| PRODUCT NO. | SIZE | STYLE | DIM A | DIM B | DIM C | DIM J | PIN PLATING NOTE 13 | PIN TYPE | PLASTIC MATERIAL |
|-------------|--------|-------|-----------|-----------|-------------|------------|----------------------------------|-------------|---------------------|
| 88880-036 | 2 X 25 | D | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .675/17.15 | 150u"/3.81u TIN | SQ | NOTE 2 |
| -037 | 2 X 7 | C | .98/24.9 | .92/23.4 | .600/15.24 | .105/2.67 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -038 | | | | | | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -039 | | | | | | .675/17.15 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -040 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -041 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -042 | 2 X 7 | C | .98/24.9 | .92/23.4 | .600/15.24 | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -043 | 2 X 8 | D | 1.08/27.4 | 1.02/25.9 | .700/17.78 | .105/2.67 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -044 | | | | | | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -045 | | | | | | .675/17.15 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -046 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -047 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -048 | 2 X 8 | D | 1.08/27.4 | 1.02/25.9 | .700/17.78 | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -049 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .150/3.81 | 30u"/0.76u GXT WITH GOLD FLASH | RD | |
| -050 | 2 X 10 | D | 1.28/32.5 | 1.22/31.0 | .900/22.86 | | | | |
| -051 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | | | | |
| -052 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | | | | |
| -053 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | | | | |
| -054 | 2 X 25 | D | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | | | | |
| -055 | 2 X 7 | C | .98/24.9 | .92/23.4 | .600/15.24 | | | | |
| -056 | 2 X 8 | D | 1.08/27.4 | 1.02/25.9 | .700/17.78 | .150/3.81 | 30u"/0.76u GXT WITH GOLD FLASH | | |
| -057 | 2 X 30 | | 3.28/83.3 | 3.22/81.8 | 2.900/73.66 | .105/2.67 | 30u"/0.76u Au OVER 50u"/1.27u Ni | | |
| -058 | | | | | | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -059 | | | | | | .675/17.15 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -060 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -061 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -062 | | | | | | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -063 | | | | | | .105/2.67 | 30u"/0.76u GXT WITH GOLD FLASH | RD | |
| -064 | | | | | | .150/3.81 | | RD | |
| -065 | 2 X 30 | D | 3.28/83.3 | 3.22/81.8 | 2.900/73.66 | .675/17.15 | | SQ | |
| -066 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .105/2.67 | | RD | |
| -067 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .675/17.15 | | SQ | |
| -068 | 2 X 7 | C | .98/24.9 | .92/23.4 | .600/15.24 | .105/2.67 | | RD | |
| -069 | 2 X 7 | C | .98/24.9 | .92/23.4 | .600/15.24 | .675/17.15 | | SQ | |
| 88880-070 | 2 X 8 | D | 1.08/27.4 | 1.02/25.9 | .700/17.78 | .105/2.67 | 30u"/0.76u GXT WITH GOLD FLASH | RD | NOTE 2 |

| | | | | | | | | | |
|-------------|----------------|----|------|---------------------------------------|-------------------------|---------------|----------------------------|-----------|-------|
| mat'l. code | | | | tolerances unless otherwise specified | | CUSTOMER COPY | | | |
| ltr | ecn no | dr | date | linear | .XX±.01/X.XX±0.25 | projection | title | | |
| J | | | | | .XXX±.005/X.XXX±0.13 | | HEADER, QUICKIE, SLIM LINE | | |
| | | | | angles | .xxx±.0020/X.xxxx±0.051 | INCH/MM | VERTICAL, 4-WALL | | |
| | | | | dr | 0° ±2° | scale | product family | QKE. HDR. | code |
| | | | | enr | M. CLOUSER 7/11/90 | 1:1 | size | dwg no | sheet |
| | | | | chr | M. SMYK 7/11/90 | A | 88880 | 4 of | |
| | | | | appd | M. SMYK 8/21/91 | | | | |
| sheet index | revision sheet | | | | | | | | |

Tous droits strictement reserves. Reproduction ou communication o des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du propriétaire.
Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Copyright FCI.

| PRODUCT NO. | SIZE | STYLE | DIM A | DIM B | DIM C | DIM J | PIN PLATING NOTE 13 | PIN TYPE | PLASTIC MATERIAL |
|-------------|--------|-------|-----------|-----------|-------------|------------|----------------------------------|-------------|---------------------|
| 88880-071 | 2 X 8 | D | 1.08/27.4 | 1.02/25.9 | .700/17.78 | .675/17.15 | 30u"/0.76u GXT WITH GOLD FLASH | SQ | NOTE 2 |
| -072 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .105/2.67 | | RD | |
| -073 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .675/17.15 | | SQ | |
| -074 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | .105/2.67 | | RD | |
| -075 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | .675/17.15 | | SQ | |
| -076 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .105/2.67 | | RD | |
| -077 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .675/17.15 | | SQ | |
| -078 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .105/2.67 | | RD | |
| -079 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .675/17.15 | | SQ | |
| -080 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .105/2.67 | | RD | |
| -081 | 2 X 25 | D | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .675/17.15 | 30u"/0.76u GXT WITH GOLD FLASH | SQ | |
| -082 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .105/2.67 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | |
| -083 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .150/3.81 | | RD | |
| -084 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .675/17.15 | | SQ | |
| -085 | 2 X 7 | C | .98/24.9 | .92/23.4 | .600/15.24 | .105/2.67 | | RD | |
| -086 | 2 X 7 | C | .98/24.9 | .92/23.4 | .600/15.24 | .150/3.81 | | RD | |
| -087 | 2 X 7 | C | .98/24.9 | .92/23.4 | .600/15.24 | .675/17.15 | | SQ | |
| -088 | 2 X 8 | D | 1.08/27.4 | 1.02/25.9 | .700/17.78 | .105/2.67 | | RD | |
| -089 | 2 X 8 | | 1.08/27.4 | 1.02/25.9 | .700/17.78 | .150/3.81 | | RD | |
| -090 | 2 X 8 | | 1.08/27.4 | 1.02/25.9 | .700/17.78 | .675/17.15 | | SQ | |
| -091 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .105/2.67 | | RD | |
| -092 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .150/3.81 | | RD | |
| -093 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .675/17.15 | | SQ | |
| -094 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | .105/2.67 | | RD | |
| -095 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | .150/3.81 | | RD | |
| -096 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | .675/17.15 | | SQ | |
| -097 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .105/2.67 | | RD | |
| -098 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .150/3.81 | | RD | |
| -099 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .675/17.15 | | SQ | |
| -100 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .105/2.67 | | RD | |
| -101 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .150/3.81 | | RD | |
| -102 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .675/17.15 | | SQ | |
| -103 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .105/2.67 | | RD | |
| -104 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .150/3.81 | | RD | |
| 88880-105 | 2 X 25 | D | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .675/17.15 | 15u"/0.38u Au OVER 50u"/1.27u Ni | SQ | NOTE 2 |

| | | | | | | | |
|-------------|----------------|---------------------------------------|------|---------------|-------------------------|---------------------------|---|
| mat'l. code | | tolerances unless otherwise specified | | CUSTOMER COPY | | FCI www.fciconnect.com | |
| ltr | ecn no | dr | date | linear | .XX±.01/X.XX±0.25 | projection | title HEADER, QUICKIE, SLIM LINE VERTICAL, 4-WALL |
| J | | | | linear | .XXX±.005/X.XXX±0.13 | | |
| | | | | angles | .xxx±.0020/X.xxxx±0.051 | | |
| | | | | dr | M. CLOUSER 7/11/90 | scale | product family QKE. HDR. code |
| | | | | enr | M. SMYK 7/11/90 | 1:1 | size dwg no |
| | | | | chr | M. SMYK 8/21/91 | A | 88880 |
| | | | | appd | M. SMYK 8/21/91 | | sheet 5 of |
| sheet index | revision sheet | | | | | | |

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Droits de reproduction FCI.
Propriete de ©FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Copyright FCI.

| PRODUCT NO. NOTE 8 & 9 | SIZE | STYLE | DIM A | DIM B | DIM C | DIM J | PIN PLATING NOTE 13 | PIN TYPE | PLASTIC MATERIAL |
|---------------------------|--------------|-------|-----------|-----------|-------------|------------|----------------------------------|-------------|---------------------|
| 88880-106 | 2 X 30 | D | 3.28/83.3 | 3.22/81.8 | 2.900/73.66 | .105/2.67 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | NOTE 2 |
| -107 | 2 X 30 | D | 3.28/83.3 | 3.22/81.8 | 2.900/73.66 | .150/3.81 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | |
| -108 | 2 X 30 | D | 3.28/83.3 | 3.22/81.8 | 2.900/73.66 | .675/17.15 | 15u"/0.38u Au OVER 50u"/1.27u Ni | SQ | |
| -109 | 2 X 5 | B | .78/19.8 | .72/18.3 | .400/10.16 | .105/2.67 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -110 | | | | | | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -111 | | | | | | .675/17.15 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -112 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -113 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -114 | | | | | | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -115 | | | | | | .105/2.67 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | |
| -116 | | | | | | .150/3.81 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | |
| -117 | | | | | | .675/17.15 | 15u"/0.38u Au OVER 50u"/1.27u Ni | SQ | |
| -118 | | | | | | .105/2.67 | 30u"/0.76u GXT WITH GOLD FLASH | RD | |
| -119 | | | | | | .150/3.81 | 30u"/0.76u GXT WITH GOLD FLASH | RD | |
| 88880-120 | 2 X 5 | B | .78/19.8 | .72/18.3 | .400/10.16 | .675/17.15 | 30u"/0.76u GXT WITH GOLD FLASH | SQ | NOTE 2 |
| 88880-121 | DISCONTINUED | | | | | | | | |
| THRU | DISCONTINUED | | | | | | | | |
| 88880-216 | DISCONTINUED | | | | | | | | |
| 88880-217 | 2 X 12 | D | 1.48/37.6 | 1.42/36.1 | 1.100/27.94 | .105/2.67 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | NOTE 2 |
| -218 | | | | | | | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -219 | | | | | | | 30u"/0.76u GXT WITH GOLD FLASH | RD | |
| -220 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -221 | | | | | | .150/3.81 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | |
| -222 | | | | | | | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -223 | | | | | | | 30u"/0.76u GXT WITH GOLD FLASH | RD | |
| -224 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -225 | | | | | | .675/17.15 | 15u"/0.38u Au OVER 50u"/1.27u Ni | SQ | |
| -226 | | | | | | | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | |
| -227 | | | | | | | 30u"/0.76u GXT WITH GOLD FLASH | SQ | |
| -228 | 2 X 12 | | 1.48/37.6 | 1.42/36.1 | 1.100/27.94 | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -229 | 2 X 15 | | 1.78/45.2 | 1.72/43.7 | 1.400/35.56 | .105/2.67 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | |
| -230 | | | | | | | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -231 | | | | | | | 30u"/0.76u GXT WITH GOLD FLASH | RD | |
| -232 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| 88880-233 | 2 X 15 | D | 1.78/45.2 | 1.72/43.7 | 1.400/35.56 | .150/3.81 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | NOTE 2 |

| | | | | | | | | | |
|-------------|----------------|----|------|---------------------------------------|-------------------------|---------------|---|---------------------------|--|
| mat'l. code | | | | tolerances unless otherwise specified | | CUSTOMER COPY | | FCI www.fciconnect.com | |
| ltr | ecn no | dr | date | linear | .XX±.01/X.XX±0.25 | projection | title HEADER, QUICKIE, SLIM LINE VERTICAL, 4-WALL | | |
| J | | | | | .XXX±.005/X.XXX±0.13 | | product family QKE. HDR. code | | |
| | | | | angles | .xxx±.0020/X.xxxx±0.051 | INCH/MM | size dwg no | | |
| | | | | | 0° ±2° | scale | A 88880 sheet 6 of | | |
| | | | | dr | M. CLOUSER 7/11/90 | 1:1 | | | |
| | | | | enr | M. SMYK 7/11/90 | | | | |
| | | | | chr | M. SMYK 8/21/91 | | | | |
| | | | | appd | M. SMYK 8/21/91 | | | | |
| sheet index | revision sheet | | | | | | | | |

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Droits de reproduction FCI.
Propriete de ©FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Copyright FCI.

| PRODUCT NO. | SIZE | STYLE | DIM A | DIM B | DIM C | DIM J | PIN PLATING NOTE 13 | PIN TYPE | PLASTIC MATERIAL |
|-------------|-------------|-------|-----------|-----------|-------------|------------|----------------------------------|-------------|---------------------|
| NOTE 8 & 9 | | | | | | | | | |
| 88880-234 | 2 X 15 | D | 1.78/45.2 | 1.72/43.7 | 1.400/35.56 | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | NOTE 2 |
| -235 | | | | | | .150/3.81 | 30u"/0.76u GXT WITH GOLD FLASH | RD | |
| -236 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -237 | | | | | | .675/17.15 | 15u"/0.38u Au OVER 50u"/1.27u Ni | | |
| -238 | | | | | | | 30u"/0.76u Au OVER 50u"/1.27u Ni | | |
| -239 | | | | | | | 30u"/0.76u GXT WITH GOLD FLASH | | |
| -240 | 2 X 15 | | 1.78/45.2 | 1.72/43.7 | 1.400/35.56 | .675/17.15 | 150u"/3.81u TIN | SQ | |
| -241 | 2 X 22 | | 2.48/63.0 | 2.42/61.5 | 2.100/53.34 | .105/2.67 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | |
| -242 | | | | | | | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -243 | | | | | | | 30u"/0.76u GXT WITH GOLD FLASH | RD | |
| -244 | | | | | | .105/2.67 | 150u"/3.81u TIN | SQ | |
| -245 | | | | | | .150/3.81 | 15u"/0.38u Au OVER 50u"/1.27u Ni | RD | |
| -246 | | | | | | | 30u"/0.76u Au OVER 50u"/1.27u Ni | RD | |
| -247 | | | | | | | 30u"/0.76u GXT WITH GOLD FLASH | RD | |
| -248 | | | | | | .150/3.81 | 150u"/3.81u TIN | SQ | |
| -249 | | | | | | .675/17.15 | 15u"/0.38u Au OVER 50u"/1.27u Ni | | |
| -250 | | | | | | | 30u"/0.76u Au OVER 50u"/1.27u Ni | | |
| -251 | | | | | | | 30u"/0.76u GXT WITH GOLD FLASH | | |
| -252 | 2 X 22 | | 2.48/63.0 | 2.42/61.5 | 2.100/53.34 | .675/17.15 | 150u"/3.81u TIN | SQ | |
| 88880-253 | 2 X 17 | D | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .105/2.67 | 15u"/0.38u Au OVER 50u"/1.27u Ni | SQ | NOTE 2 |
| 88880-254 | UNAVAILABLE | | | | | | | | |
| THRU | | | | | | | | | |
| 88880-279 | UNAVAILABLE | | | | | | | | |
| 88880-280 | 2 X 10 | D | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .105/2.67 | 150u"/3.81u TIN | SQ | NOTE 2 |
| 88880-281 | UNAVAILABLE | | | | | | | | |
| THRU | | | | | | | | | |
| 88880-306 | UNAVAILABLE | | | | | | | | |

| | | | | | | | | | |
|-------------|----------------|----|------|---------------------------------------|------------|---------------|--|---|--|
| mat'l. code | | | | tolerances unless otherwise specified | | CUSTOMER COPY | | FCI www.fciconnect.com | |
| ltr | ecn no | dr | date | .XX±.01/X.XX±0.25 | | projection | | title | |
| J | | | | linear .XXX±.005/X.XXX±0.13 | | INCH/MM | | HEADER, QUICKIE, SLIM LINE VERTICAL, 4-WALL | |
| | | | | .XXX±.0020/X.XXX±0.051 | | scale | | product family QKE. HDR. code | |
| | | | | angles 0° ±2° | | 1:1 | | size dwg no | |
| | | | | dr | M. CLOUSER | 7/11/90 | | A 88880 | |
| | | | | enr | M. SMYK | 7/11/90 | | sheet 7 of | |
| | | | | chr | M. SMYK | 8/21/91 | | | |
| | | | | appd | M. SMYK | 8/21/91 | | | |
| sheet index | revision sheet | | | | | | | | |

Tous droits strictement réservés. Reproduction ou communication o des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Propriété de ©FCI.
Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of ©FCI.

| PRODUCT NO. NOTE 8 & 9 | SIZE | STYLE | DIM A | DIM B | DIM C | DIM J | PIN PLATING NOTE 13 | PIN TYPE | PLASTIC MATERIAL |
|---------------------------|--------|-------|-----------|-----------|-------------|-----------|----------------------------------|-------------|---------------------|
| 88880-307 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .097/2.46 | 30u"/0.76u GXT WITH GOLD FLASH | SQ | NOTE 2 |
| -308 | 2 X 5 | B | .78/19.8 | .72/18.3 | .400/10.16 | | | | |
| -309 | 2 X 7 | C | .98/24.9 | .92/23.4 | .600/15.24 | | | | |
| -310 | 2 X 8 | D | 1.08/27.4 | 1.02/25.9 | .700/17.78 | | | | |
| -311 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | | | | |
| -312 | 2 X 12 | | 1.48/37.6 | 1.42/36.1 | 1.100/27.94 | | | | |
| -313 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | | | | |
| -314 | 2 X 15 | | 1.78/45.2 | 1.72/43.7 | 1.400/35.56 | | | | |
| -315 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | | | | |
| -316 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | | | | |
| -317 | 2 X 22 | | 2.48/63.0 | 2.42/61.5 | 2.100/53.34 | | | | |
| -318 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | | | | |
| -319 | 2 X 30 | | 3.28/83.3 | 3.22/81.8 | 2.900/73.66 | .097/2.46 | 30u"/0.76u GXT WITH GOLD FLASH | | |
| -320 | 2 X 8 | | 1.08/27.4 | 1.02/25.9 | .700/17.78 | .105/2.67 | 30u"/0.76u Au OVER 50u"/1.27u Ni | | |
| -321 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | | 30u"/0.76u Au OVER 50u"/1.27u Ni | | |
| -322 | 2 X 8 | | 1.08/27.4 | 1.02/25.9 | .700/17.78 | | 50u"/1.27u Au OVER 50u"/1.27u Ni | | |
| -323 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .105/2.67 | 50u"/1.27u Au OVER 50u"/1.27u Ni | | NOTE 2 |
| -324 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .120/3.05 | 15u"/0.38u GXT WITH GOLD FLASH | | NOTE 6 |
| -325 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .150/3.81 | 30u"/0.76u GXT WITH GOLD FLASH | | NOTE 2 |
| -326 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .120/3.05 | 15u"/0.38u GXT WITH GOLD FLASH | | NOTE 7 |
| -327 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .120/3.05 | 15u"/0.38u GXT WITH GOLD FLASH | | NOTE 7 |
| -328 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .120/3.05 | 15u"/0.38u GXT WITH GOLD FLASH | | NOTE 7 |
| -329 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | .150/3.81 | 15u"/0.38u Au OVER 50u"/1.27u Ni | | NOTE 2 |
| -330 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | | 15u"/0.38u Au OVER 50u"/1.27u Ni | | |
| -331 | 2 X 30 | | 3.28/83.3 | 3.22/81.8 | 2.900/73.66 | | 15u"/0.38u Au OVER 50u"/1.27u Ni | | |
| -332 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | | 15u"/0.38u Au OVER 50u"/1.27u Ni | | |
| -333 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .150/3.81 | 30u"/0.76u GXT WITH GOLD FLASH | SQ | |
| -334 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .105/2.67 | 15u"/0.38u GXT WITH GOLD FLASH | RD | NOTE 2 |
| -335 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .105/2.67 | 30u"/0.76u GXT WITH GOLD FLASH | RD | NOTE 6 |
| -336 | 2 X 22 | D | 2.48/63.0 | 2.42/61.5 | 2.100/53.34 | .105/2.67 | 30u"/0.76u GXT WITH GOLD FLASH | RD | NOTE 6 |
| -337 | 2 X 12 | D | 1.48/37.6 | 1.42/36.1 | 1.100/27.94 | .150/3.81 | 15u"/0.38u Au OVER 50u"/1.27u Ni | SQ | NOTE 2 |
| -338 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .150/3.81 | 15u"/0.38u Au OVER 50u"/1.27u Ni | SQ | NOTE 2 |
| -339 | 2 X 4 | A | .68/17.2 | .62/15.7 | .300/7.62 | .105/2.67 | 15u"/0.38u GXT WITH GOLD FLASH | SQ | NOTE 2 |
| 88880-340 | 2 X 10 | D | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | NOTE 2 |

| | | | | | | | |
|-------------|----------------|---------------------------------------|------------|---------------|-------------------------|---------------------------|----------------------------|
| mat'l. code | | tolerances unless otherwise specified | | CUSTOMER COPY | | FCI www.fciconnect.com | |
| ltr | ecn no | dr | date | linear | .XX±.01/X.XX±0.25 | projection | title |
| J | | | | | .XXX±.005/X.XXX±0.13 | ⊕ | HEADER, QUICKIE, SLIM LINE |
| | | | | angles | .xxx±.0020/X.xxxx±0.051 | ↔ | VERTICAL, 4-WALL |
| | | | | | 0° ±2° | INCH/MM | product family |
| | | dr | M. CLOUSER | 7/11/90 | | ← | QKE. HDR. |
| | | enr | M. SMYK | 7/11/90 | scale | 1:1 | code |
| | | chr | M. SMYK | 8/21/91 | | A | 88880 |
| | | appd | M. SMYK | 8/21/91 | | | sheet |
| sheet index | revision sheet | | | | | | 8 of |

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of ©FCI
Copyright FCI.



Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Propriété de ©FCI.
Droits de reproduction FCI.

| PRODUCT NO. | SIZE | STYLE | DIM A | DIM B | DIM C | DIM J | PIN PLATING NOTE 13 | PIN TYPE | PLASTIC MATERIAL |
|-------------|---------------------|-------|-----------|-----------|-------------|-----------|----------------------------------|-------------|---------------------|
| 88880-341 | 2 X 17 | D | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | SQ | NOTE 2 |
| -342 | 2 X 10 | D | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .150/3.81 | 15u"/0.38u GXT WITH GOLD FLASH | SQ | NOTE 2 |
| -343 | 2 X 17 | D | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .150/3.81 | 15u"/0.38u GXT WITH GOLD FLASH | SQ | NOTE 2 |
| -344 | U N A S S I G N E D | | | | | | | | |
| -345 | 2 X 20 | D | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .120/3.05 | 15u"/0.38u GXT WITH GOLD FLASH | SQ | NOTE 7 |
| -346 | U N A S S I G N E D | | | | | | | | |
| -347 | U N A S S I G N E D | | | | | | | | |
| -348 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .105/2.67 | 15u"/0.38u GXT WITH GOLD FLASH | SQ | NOTE 2 |
| -349 | 2 X 7 | C | .98/24.9 | .92/23.4 | .600/15.24 | | | | |
| -350 | 2 X 8 | D | 1.08/27.4 | 1.02/25.9 | .700/17.78 | | | | |
| -351 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | | | | |
| -352 | 2 X 13 | | 1.58/40.1 | 1.52/38.6 | 1.200/30.48 | | | | |
| -353 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | | | | |
| -354 | 2 X 20 | | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | | | | |
| -355 | 2 X 22 | | 2.48/63.0 | 2.42/61.5 | 2.100/53.34 | | | | |
| -356 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | | | | |
| -357 | 2 X 30 | | 3.28/83.3 | 3.22/81.8 | 2.900/73.66 | .105/2.67 | 15u"/0.38u GXT WITH GOLD FLASH | | |
| -358 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | | |
| -359 | 2 X 17 | | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .150/3.81 | 30u"/0.76u Au OVER 50u"/1.27u Ni | | NOTE 2 |
| -360 | 2 X 12 | D | 1.48/37.6 | 1.42/36.1 | 1.100/27.94 | .295/7.49 | 15u"/0.38u GXT WITH GOLD FLASH | SQ | NOTE 7 |
| -361 | U N A S S I G N E D | | | | | | | | |
| -362 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .105/2.67 | 30u"/0.76u GXT WITH GOLD FLASH | SQ | NOTE 2 |
| -363 | 2 X 8 | D | 1.08/27.4 | 1.02/25.9 | .700/17.78 | | | | |
| -364 | 2 X 10 | D | 1.28/32.5 | 1.22/31.0 | .900/22.86 | | | | |
| -365 | 2 X 15 | D | 1.78/45.2 | 1.72/43.7 | 1.400/35.56 | | | | |
| -366 | 2 X 17 | D | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .105/2.67 | | | |
| -367 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .150/3.81 | | | |
| -368 | 2 X 17 | D | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | .150/3.81 | | | |
| 88880-369 | 2 X 25 | D | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | .150/3.81 | 30u"/0.76u GXT WITH GOLD FLASH | SQ | NOTE 2 |

| | | | | | | | | |
|-------------|----------------|---------------------------------------|------------|--------------------------|------------|----------------------------|--------|-------|
| mat'l. code | | tolerances unless otherwise specified | | CUSTOMER COPY | | FCI www.fciconnect.com | | |
| ltr | ecn no | dr | date | .XX±.01/X.XX±0.25 | projection | title | | |
| J | | | | .XXX±.005/X.XXX±0.13 | | HEADER, QUICKIE, SLIM LINE | | |
| | | | | .XXXX±.0020/X.XXXX±0.051 | | VERTICAL, 4-WALL | | |
| | | | | angles 0° ±2° | INCH/MM | product family | code | |
| | | dr | M. CLOUSER | 7/11/90 | scale 1:1 | QKE. HDR. | | |
| | | enr | M. SMYK | 7/11/90 | | size | dwg no | sheet |
| | | chr | M. SMYK | 8/21/91 | | A | 88880 | 9 of |
| | | appd | M. SMYK | 8/21/91 | | | | |
| sheet index | revision sheet | | | | | | | |



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of ©FCI

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Propriété de ©FCI.

| PRODUCT NO. NOTE 8 & 9 | SIZE | STYLE | DIM A | DIM B | DIM C | DIM J | PIN PLATING NOTE 13 | PIN TYPE | PLASTIC MATERIAL | POLARIZED PIN |
|---------------------------|--------|-------|-----------|-----------|-------------|-----------|--------------------------------|----------|------------------|---------------|
| 88880-404 | 2 X 20 | D | 2.28/57.9 | 2.22/56.4 | 1.900/48.26 | .120/3.05 | 15μ/0.38μm GXT WITH GOLD FLASH | SQ | NOTE 2,BLUE | 20 |
| -410 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | | | | | - |
| -418 | 2 X 10 | | 1.28/32.5 | 1.22/31.0 | .900/22.86 | | | | | 14 |
| -423 | 2 X 25 | | 2.78/70.6 | 2.72/69.1 | 2.400/60.96 | | | | | 25 |
| -426 | 2 X 17 | D | 1.98/50.3 | 1.92/48.8 | 1.600/40.64 | | | | | 3 |
| 88880-427 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .120/3.05 | 15μ/0.38μm GXT WITH GOLD FLASH | SQ | NOTE 2,BLUE | 1 |
| 88880-428 | 2 X 5 | A | .78/19.8 | .72/18.3 | .400/10.16 | .150/3.81 | 30μ/0.76μm GXT WITH GOLD FLASH | RD | NOTE 2,BLUE | 10 |

| | | | | | | | | | |
|-------------|----------------|----|------|---------------------------------------|------------------------|---------------|----------------------------|--------------------|-------|
| mat'l. code | | | | tolerances unless otherwise specified | | CUSTOMER COPY | | www.fciconnect.com | |
| ltr | ecn no | dr | date | linear | .XX±.01/X.XX±0.25 | projection | title | | |
| H | | | | | .XXX±.005/X.XXX±0.13 | | HEADER, QUICKIE, SLIM LINE | | |
| | | | | angles | .XXX±.0020/X.XXX±0.051 | INCH/MM | VERTICAL, 4-WALL | | |
| | | | | dr | E KROPIEWNICKI 4/26/96 | scale | product family | QKE. HDR. | code |
| | | | | enr | L. FYE 4/26/96 | 1:1 | size | dwg no | sheet |
| | | | | chr | L. FYE 4/26/96 | | A | 88880 | 10 of |
| | | | | appd | L. FYE 4/26/96 | | | | |
| sheet index | revision sheet | | | | | | | | |