

UHF TV TUNER OSC/MIXER  
NPN SILICON EPITAXIAL TRANSISTOR

DESCRIPTION

The 2SC4569 is an NPN silicon epitaxial transistor intended for use as UHF oscillator and UHF mixer in a tuner of TV receiver.


FEATURES

- High gain bandwidth product  
 $f_T = 5.0$  GHz TYP.
- Low output capacitance  
 $C_{ob} = 0.9$  pF TYP.
- Surface mount package  
EIAJ: SC-59

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25$  °C)

Maximum Voltages and Current

Collector to Base Voltage	$V_{CBO}$	20	V
Collector to Emitter Voltage	$V_{CEO}$	12	V
Emitter to Base Voltage	$V_{EBO}$	3.0	V
Collector Current	$I_C$	60	mA
Total Power Dissipation	$P_T$	150	mW
Junction Temperature	$T_J$	125	°C
Storage Temperature	$T_{stg}$	-55 to +125	°C

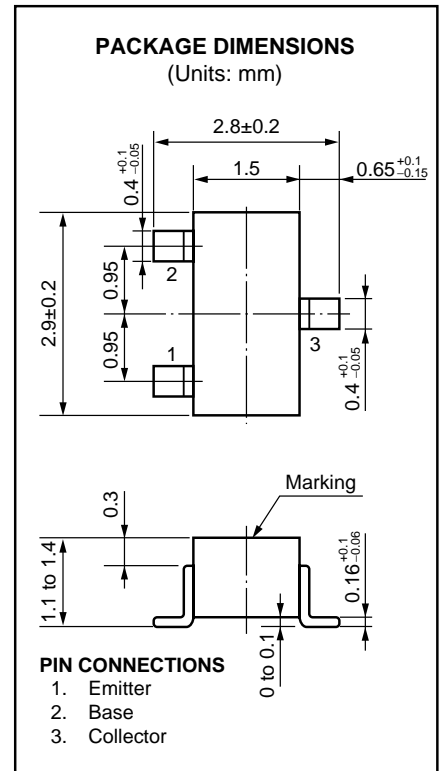

ELECTRICAL CHARACTERISTICS ( $T_A = 25$  °C)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	$I_{CBO}$			0.1	$\mu A$	$V_{CB} = 15$ V, $I_E = 0$
Emitter Cutoff Current	$I_{EBO}$			0.1	$\mu A$	$V_{EB} = 1$ V, $I_C = 0$
Collector Saturation Voltage	$V_{CE(sat)}$			0.5	V	$h_{FE} = 10$ , $I_C = 5$ mA
DC Current Gain	$h_{FE}$	40	100	200		$V_{CE} = 5$ V, $I_C = 5$ mA *1
Gain Bandwidth Product	$f_T$		5.0		GHz	$V_{CE} = 5$ V, $I_C = 5$ mA $f = 1.0$ GHz
Output Capacitance	$C_{ob}$		0.9	1.2	pF	$V_{CB} = 5$ V, $I_E = 0$ , $f = 1.0$ MHz
Insertion Gain	$ S_{21e} ^2$	5.0			dB	$V_{CE} = 5$ V, $I_C = 5$ mA, $f = 1.0$ MHz

\*1 Pulsed:  $PW \leq 35$   $\mu s$ , Duty Cycle  $\leq 2$  %

★

h<sub>FE</sub> Classification




Class	T75/EB *	T76/FB *	T77/GB *
Marking	T75	T76	T77
$h_{FE}$	40 to 80	60 to 120	100 to 200

\* Old Specification / New Specification

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

Not all devices/types available in every country. Please check with local NEC Compound Semiconductor Devices representative for availability and additional information.

TYPICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)

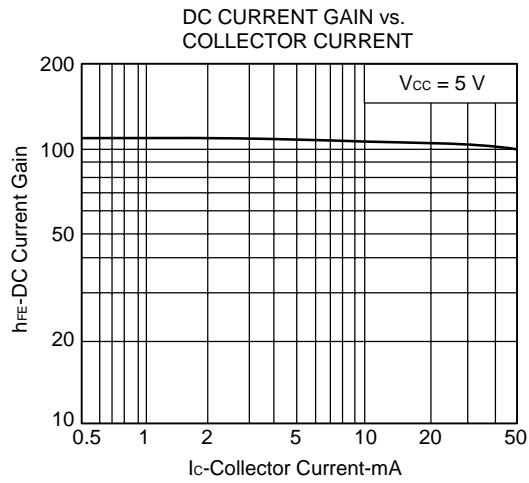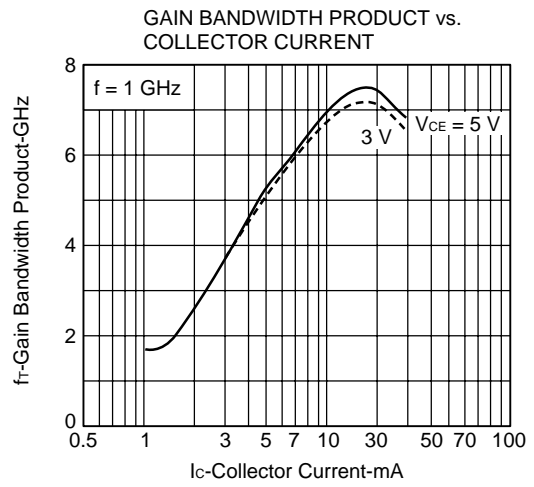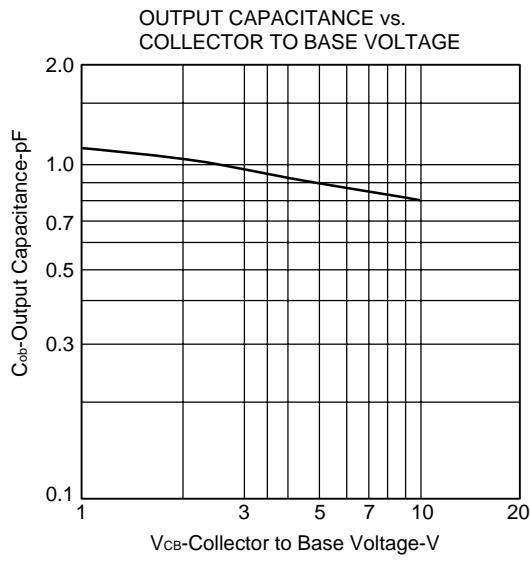

**S-PARAMETER**

V<sub>CE</sub> = 5 V, I<sub>c</sub> = 1 mA

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.958	-18.7	3.299	164.6	0.038	77.8	0.973	-7.8
200.00	0.917	-36.4	3.151	150.4	0.072	68.2	0.944	-14.5
300.00	0.855	-53.0	2.926	137.5	0.100	59.7	0.899	-20.6
400.00	0.799	-67.5	2.685	126.2	0.118	51.7	0.850	-25.9
500.00	0.739	-81.5	2.462	116.1	0.134	45.8	0.806	-29.7
600.00	0.693	-93.5	2.256	107.3	0.142	41.1	0.778	-33.0
700.00	0.647	-104.2	2.072	99.9	0.148	37.6	0.743	-35.9
800.00	0.607	-113.9	1.889	92.4	0.152	35.2	0.716	-39.0
900.00	0.583	-123.7	1.760	86.5	0.154	33.4	0.702	-40.6
1000.00	0.559	-132.5	1.615	79.8	0.155	31.7	0.688	-43.4

V<sub>CE</sub> = 5 V, I<sub>c</sub> = 3 mA

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.860	-29.5	9.203	156.2	0.035	74.7	0.932	-14.9
200.00	0.754	-55.1	7.982	137.3	0.062	61.5	0.826	-25.6
300.00	0.648	-75.6	6.693	122.6	0.078	55.1	0.723	-32.3
400.00	0.562	-91.9	5.623	111.9	0.090	51.0	0.641	-36.7
500.00	0.506	-106.5	4.796	103.1	0.099	48.9	0.583	-39.1
600.00	0.462	-118.1	4.188	95.9	0.106	48.2	0.547	-41.0
700.00	0.429	-127.8	3.695	90.3	0.112	48.7	0.514	-42.2
800.00	0.400	-137.4	3.278	84.5	0.119	48.1	0.492	-44.3
900.00	0.390	-144.7	2.984	79.9	0.127	49.2	0.478	-45.2
1000.00	0.378	-153.3	2.711	75.0	0.133	49.8	0.467	-47.2

V<sub>CE</sub> = 5 V, I<sub>c</sub> = 5 mA

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.769	-38.2	13.666	149.3	0.032	70.4	0.885	-20.1
200.00	0.630	-68.1	10.889	128.6	0.054	60.9	0.728	-32.1
300.00	0.513	-89.7	8.545	114.5	0.067	55.6	0.606	-37.7
400.00	0.442	-106.3	6.888	104.9	0.076	54.2	0.528	-40.6
500.00	0.399	-120.6	5.752	97.1	0.086	54.8	0.495	-42.0
600.00	0.368	-131.7	4.940	91.0	0.094	54.5	0.446	-42.9
700.00	0.345	-140.4	4.300	86.2	0.104	55.8	0.420	-43.9
800.00	0.329	-149.4	3.801	81.3	0.113	56.3	0.401	-45.3
900.00	0.323	-156.7	3.434	77.3	0.123	56.7	0.390	-45.8
1000.00	0.316	-163.7	3.112	72.8	0.133	56.8	0.384	-47.4

V<sub>CE</sub> = 5 V, I<sub>c</sub> = 7 mA

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.698	-45.4	17.070	144.7	0.031	68.1	0.839	-24.3
200.00	0.540	-77.6	12.682	122.8	0.049	58.9	0.655	-35.9
300.00	0.435	-99.9	9.583	109.5	0.061	58.2	0.533	-40.4
400.00	0.372	-116.7	7.566	100.8	0.071	58.1	0.461	-43.1
500.00	0.343	-129.7	6.238	93.8	0.080	59.3	0.415	-42.9
600.00	0.321	-139.8	5.324	88.4	0.090	59.9	0.390	-43.1
700.00	0.306	-148.4	4.613	84.0	0.100	60.7	0.370	-44.0
800.00	0.297	-157.5	4.066	79.4	0.113	60.7	0.354	-45.3
900.00	0.291	-162.9	3.669	75.7	0.124	61.2	0.344	-45.7
1000.00	0.286	-170.4	3.319	71.6	0.135	61.0	0.340	-47.6

V<sub>CE</sub> = 5 V, I<sub>c</sub> = 9 mA

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.629	-51.3	19.656	140.7	0.029	66.7	0.800	-27.2
200.00	0.474	-85.3	13.850	118.7	0.045	61.4	0.598	-38.3
300.00	0.381	-107.7	10.219	106.2	0.056	59.8	0.481	-41.5
400.00	0.334	-123.4	7.978	98.1	0.067	61.1	0.170	-42.4
500.00	0.310	-137.2	6.530	91.8	0.079	61.8	0.375	-43.0
600.00	0.295	-146.9	5.550	86.7	0.089	63.4	0.356	-43.0
700.00	0.286	-154.5	4.805	82.5	0.101	63.6	0.339	-43.4
800.00	0.274	-162.4	4.228	78.3	0.112	63.5	0.325	-44.8
900.00	0.275	-168.2	3.793	74.8	0.125	63.7	0.317	-45.5
1000.00	0.274	-175.1	3.442	71.0	0.136	63.2	0.310	-47.2

- **The information in this document is current as of October, 2001. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
  - No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
  - NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
  - Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
  - While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
  - NEC semiconductor products are classified into the following three quality grades:  
 "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
    - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
    - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
    - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
- The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.
- (Note)
- (1) "NEC" as used in this statement means NEC Corporation, NEC Compound Semiconductor Devices, Ltd. and also includes its majority-owned subsidiaries.
  - (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4-0110

---

► **Business issue**

**NEC Compound Semiconductor Devices, Ltd.**

5th Sales Group, Sales Division TEL: +81-3-3798-6372 FAX: +81-3-3798-6783 E-mail: salesinfo@csd-nec.com

**NEC Compound Semiconductor Devices Hong Kong Limited**

Hong Kong Head Office TEL: +852-3107-7303 FAX: +852-3107-7309

Taipei Branch Office TEL: +886-2-8712-0478 FAX: +886-2-2545-3859

Korea Branch Office TEL: +82-2-528-0301 FAX: +82-2-528-0302

**NEC Electron Devices European Operations** <http://www.nec.de/>

TEL: +49-211-6503-101 FAX: +49-211-6503-487

**California Eastern Laboratories, Inc.** <http://www.cel.com/>

TEL: +1-408-988-3500 FAX: +1-408-988-0279

► **Technical issue**

**NEC Compound Semiconductor Devices, Ltd.** <http://www.csd-nec.com/>

Sales Engineering Group, Sales Division

E-mail: techinfo@csd-nec.com FAX: +81-44-435-1918