
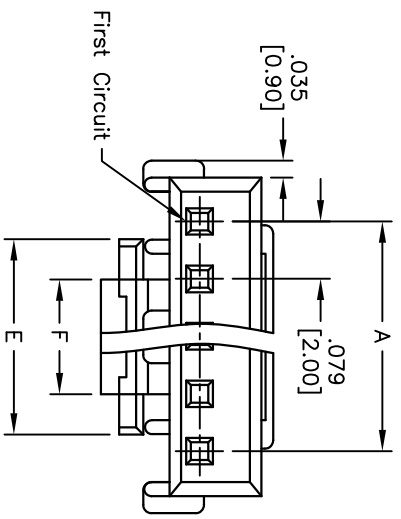


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/5/10	

APPROVED: _____
 DATE: _____ TITLE: _____

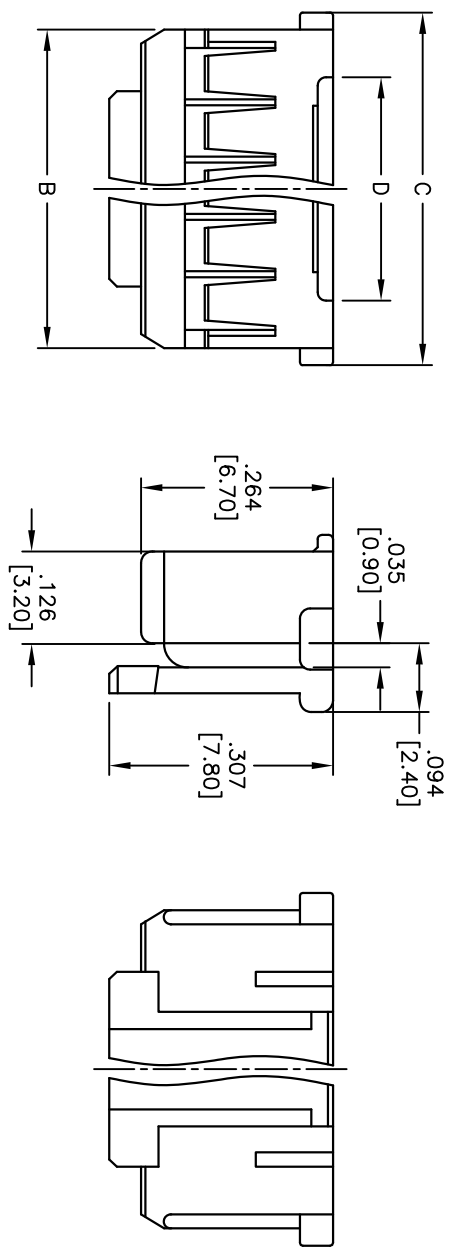

Positions	E	F
4 ~ 7	.268 [6.80]	.157 [4.00]
8 ~ 15	.425 [10.80]	.315 [8.00]

Positions: 4 thru 15
 A = .079 [2.00] x No. of Spaces + .122 [3.10]
 B = .079 [2.00] x No. of Spaces + .169 [4.30]
 C = .079 [2.00] x No. of Spaces + .169 [4.30]
 D = .079 [2.00] x No. of Spaces - .008 [0.20]

SPECIFICATIONS:
 Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: White
 Electrical:
 Operating voltage: 125 VAC max
 Current rating: 2.0 Amp max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN AV	11/5/10
CHECKED AH	11/5/10
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SIZE	PART NO.	REV.
X	ZCH-G-XX	-

REF: S00124T SCALE: NTS SHEET 1 OF 1