


REVISION AB



DO NOT SCALE FROM THIS PRINT

UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DIMENSIONS ARE IN INCHES
 ONE PLACE DECIMALS ± .1 [2.5] THREE PLACE DECIMALS ± .005 [.13]
 TWO PLACE DECIMALS ± .01 [.25] FOUR PLACE DECIMALS ± .0020 [.051]

TITLE: HI-TEMP TERMINAL MICRO-STRIP(SINGLE ROW)
 DWG NO: FTR-1XX-XX-XX-S-XX-XX
 SHEET 1 OF 1

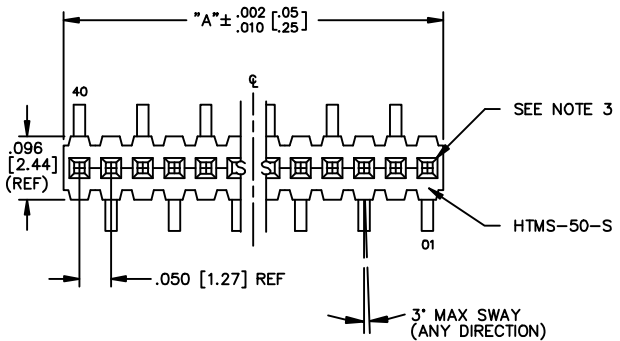

* PIN ALIGNMENT REFERENCE TO -S-SM OPTION ONLY SEE NOTE 5

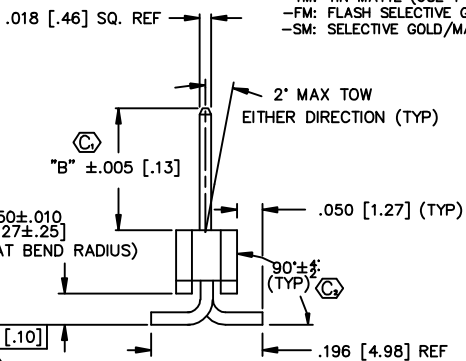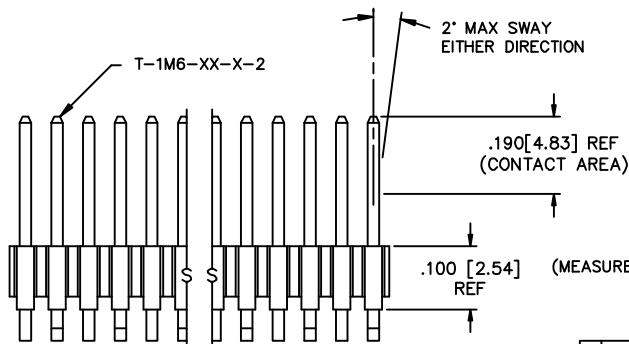

FTR-1XX-XX-XX-S-XX-XX

BODY LENGTH SPEC EXPRESSED IN # POS PER ROW (-02 THRU -40)
 "A" = "XX" x .050 [1.27]

LEAD STYLE SPEC SEE TABLE 1

PLATING SPECIFICATION
 -G: GOLD (USE T-1M6-XX-G-2)
 -T: TIN (USE T-1M6-XX-T-2)
 -S: SELECTIVE GOLD (USE T-1M6-XX-S-2)
 -F: FLASH SELECTIVE GOLD (USE T-1M6-XX-F-2) (LEAD STYLE SPEC -01 ONLY)
 -TM: TIN MATTE (USE T-1M6-XX-T-2)
 -FM: FLASH SELECTIVE GOLD/MATTE TIN TAIL (USE T-1M6-XX-F-2)
 -SM: SELECTIVE GOLD/MATTE TIN TAIL (USE T-1M6-XX-S-2)

OPTION
 -P: PICK & PLACE PAD (USE PPP-11)
 -TR: TAPE & REEL (4 POS MIN)

OPTION
 -POLARIZING SPECIFICATION (XX INDICATES POS. TO BE OMITTED)


BODY SPECIFICATION
 -S: SINGLE (USE HTMS-50-S)

- NOTES:
1. MAX ALLOWABLE BOW: .005 INCH/INCH.
 2. TERMINAL PUSHOUT FORCE: 2 lbs. MIN.
 3. MAX PIN ROTATION IN BODY: 2°.
 4. SHEAR TAIL TO DIMENSION GIVEN.
 5. NOTE DELETED.
 6. Ⓞ REPRESENTS A CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL USE.
 7. TUBE POSITIONS -05 THRU -50 ONLY FOR THIS LEAD STYLE.
 8. .003 [.08] MAX BURR
 9. CUT FLASH: .010 [.25] MAX

LEAD STYLE	TERMINAL SPEC.	'B'	TUBE (SEE NOTE 7)	PLUG
-01	T-1M6-13-X-2	.230 [5.84]	PT-1-24-01-46	TP-24
-01 (W/PAD OPTION)	T-1M6-13-X-2	.230 [5.84]	PT-1-24-05-29	TP-03
-02	T-1M6-04-X-2	.100 [2.54]	PT-1-24-02-29	TP-24
-02 (W/PAD OPTION)	T-1M6-04-X-2	.100 [2.54]	PT-1-24-05-29	TP-03
-03 (W/PAD OPTION)	T-1M6-04-X-2	.125 [3.18]	PT-1-24-04-15	TP-09
-03 (NO OPTIONS)	T-1M6-04-X-2	.125 [3.18]	PT-1-24-02-29	TP-24
-21	N/A	.230 [5.84]	N/A	N/A
-51	T-1M6-13-X-2	.190 [4.83]	PT-1-24-02-29	TP-24
-52	T-1M6-13-X-2	.205 [5.21]	PT-1-24-13-29	TP-24
-52 (W/PAD OPTION)	T-1M6-13-X-2	.205 [5.21]	PT-1-24-05-29	TP-03
-53	T-1M6-05-X-2	.285 [7.24]	PT-1-24-02-29	TP-24
-54	T-1M6-15-X-2	.335 [8.51]	PT-1-24-13-29	TP-24
-55	T-1M6-16-X-2	.390 [9.91]	PT-1-24-10-29	TP-24
-56	T-1M6-16-X-2	.405 [10.29]	PT-1-24-10-29	TP-24
-57	T-1M6-16-X-2	.430 [10.91]	PT-1-24-03-71	TP-24
-58	N/A	.485 [12.32]	N/A	N/A
-59	N/A	.535 [13.59]	N/A	N/A
-60	N/A	.605 [15.37]	N/A	N/A
-53,-54,-55,-56,-57 (W/PAD OPTION)	N/A	N/A	PT-1-24-03-71	TP-09

AVAILABLE ON 8 - 40 POSITION ONLY

"N" = USE MEASURED DIMENSION
 "Q" = {("N" - .400 [10.16]) / 2} ± .020 [.51]

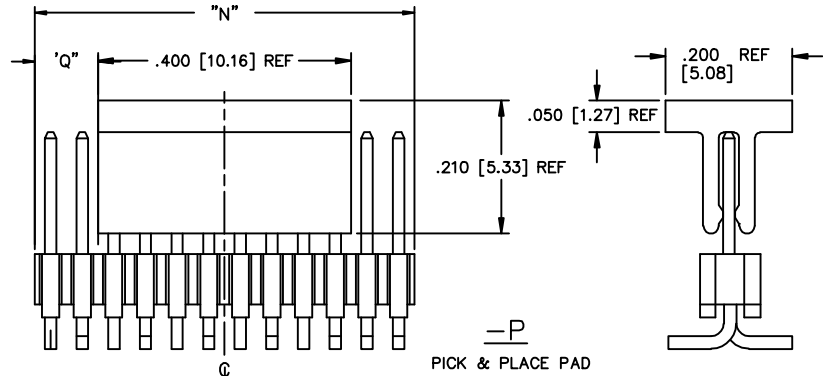

LENGTH	"L"
-04	.505 [12.83]
-05	.705 [17.91]
-13	.625 [15.88]
-15	.755 [19.18]
-16	.825 [20.96]

MATERIAL:
 BODY: LIQUID CRYSTAL POLYMER
 COLOR: BLACK

TERMINAL:
 PHOS BRONZE
 MAX FLASH ALLOWED: .004 [.10]
 MAX GATE VESTIGE ALLOWED: .002 [.05]

EXSPROD ASSEMBLY 050 FTR-S-SM

samtec

520 PARK EAST BLD. NEW ALBANY, INDIANA 47151-1147
 PHONE (812) 944-6733 P.O. BOX 1147
 CODE 55322

MADE BY: BRATCHER 7-10-95

FTR-1XX-XX-XX-S-XX-XX
 SHEET 1 OF 1

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC AND SHALL NOT BE REPRODUCED OR TRANSMITTED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.