




Surface Mount Zener Diodes


Zener Voltage 9.1 to 68V  
Steady State Power 1.5W

DO-214AA (SMBJ-Bend)

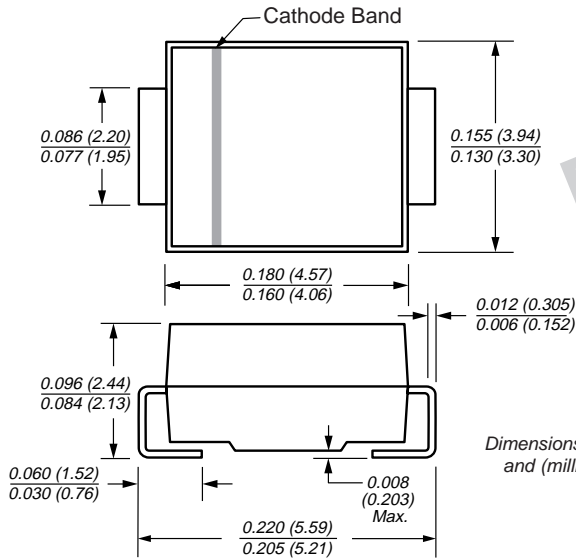

Extended Voltage Range

Mounting Pad Layout

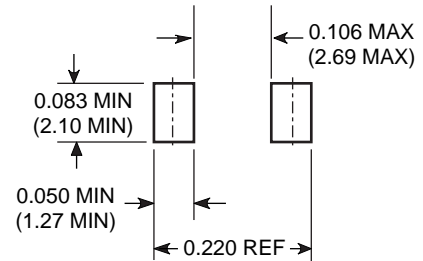

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Glass passivated chip junction
- Low Zener impedance
- Low regulation factor
- High temperature soldering guaranteed: 250°C/10 seconds at terminals
- Contact local sales office for gull-wing (SMZG prefix) lead form (DO-215AA)

Mechanical Data

- Case:** JEDEC DO-214AA molded plastic over glass passivated junction
- Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity:** Band denotes cathode
- Mounting Position:** Any **Weight:** 0.003 oz., 0.093 g
- Packaging Codes – Options (Antistatic):**
  - 51 – 2K per Bulk box, 20K/carton
  - 52 – 750 per 7" plastic Reel (12mm tape), 15K/carton
  - 5B – 3.2K per 13" plastic Reel (12mm tape), 32K/carton

Maximum Electrical Characteristics

Operating Junction and Storage Temperature Range: T<sub>J</sub>, T<sub>STG</sub>: -55°C to +150°C

Part Number	Device Marking Code	Nominal Zener Voltage V <sub>Z</sub> at I <sub>ZT</sub> (V)	Test Current I <sub>ZT</sub> (mA)	Max. Zener Impedance Leakage Current			Max. Reverse Current I <sub>R</sub> at V <sub>R</sub>		Max. Zener Current I <sub>ZM</sub> (mA)
				Z <sub>ZT</sub> at I <sub>ZT</sub> (Ω)	Z <sub>ZK</sub> at I <sub>ZK</sub>		I <sub>R</sub> (μA)	V <sub>R</sub> (V)	
					(Ω)	(mA)			
SMZJ3788A,B	VK,L	9.1	41.2	4.0	1000	0.50	50	7.0	140
SMZJ3789A,B	WA,B	10	37.5	5.0	1000	0.25	50	7.6	125
SMZJ3790A,B	WC,D	11	34.1	6.0	650	0.25	10	8.4	115
SMZJ3791A,B	WE,F	12	31.2	7.0	550	0.25	5.0	9.1	105
SMZJ3792A,B	WG,H	13	28.8	7.5	550	0.25	5.0	9.9	98
SMZJ3793A,B	WI,J	15	25.0	9.0	600	0.25	5.0	11.4	85
SMZJ3794A,B	WK,L	16	23.4	10.0	600	0.25	5.0	12.2	80
SMZJ3795A,B	XA,B	18	20.8	12.0	650	0.25	5.0	13.7	70
SMZJ3796A,B	XC,D	20	18.7	14.0	650	0.25	5.0	15.2	62
SMZJ3797A,B	XE,F	22	17.0	17.5	650	0.25	5.0	16.7	56
SMZJ3798A,B	XG,H	24	15.6	19.0	700	0.25	5.0	18.2	51
SMZJ3799A,B	XI,J	27	13.9	23.0	700	0.25	5.0	20.6	46

Notes: (1) Standard voltage tolerance is ±20%, suffix "A" denotes ±10% and suffix "B" denotes ±5%  
(2) Maximum steady state power dissipation is 1.5W at T<sub>L</sub> = 75°C (See Fig. 1)




## Max. Electrical Characteristics (con't.) Operating Junction and Storage Temperature Range: $T_J, T_{STG}$ : $-55^{\circ}\text{C}$ to $+150^{\circ}\text{C}$

Part Number Modified J-Bend	Device Marking Code	Nominal Zener Voltage $V_Z$ at $I_{ZT}$ (V)	Test Current $I_{ZT}$ (mA)	Max. Zener Impedance Leakage Current			Max. Reverse Current $I_R$ at $V_R$		Max. Zener Current $I_{ZM}$ (mA)
				$Z_{ZT}$ at $I_{ZT}$ ( $\Omega$ )	$Z_{ZK}$ at $I_{ZK}$		( $\mu\text{A}$ )	(V)	
					( $\Omega$ )	(mA)			
SMZJ3800A,B	XK,L	30	12.5	26.0	750	0.25	5.0	22.8	41
SMZJ3801A,B	YA,B	33	11.4	33.0	800	0.25	5.0	25.1	38
SMZJ3802A,B	YC,D	36	10.4	38.0	850	0.25	5.0	27.4	35
SMZJ3803A,B	YE,F	39	9.6	45.0	900	0.25	5.0	29.7	31
SMZJ3804A,B	YG,H	43	8.7	53.0	950	0.25	5.0	32.7	28
SMZJ3805A,B	YI,J	47	8.0	67.0	1000	0.25	5.0	35.8	26
SMZJ3806A,B	YK,L	51	7.3	70.0	1100	0.25	5.0	38.8	24
SMZJ3807A,B	ZA,B	56	6.7	86.0	1300	0.25	5.0	42.6	22
SMZJ3808A,B	ZC,D	62	6.0	100.0	1500	0.25	5.0	47.1	20
SMZJ3809A,B	ZE,F	68	5.5	120.0	1700	0.25	5.0	51.7	18


Notes: (1) Standard voltage tolerance is  $\pm 20\%$ , suffix "A" denotes  $\pm 10\%$  and suffix "B" denotes  $\pm 5\%$   
 (2) Maximum steady state power dissipation is 1.5W at  $T_L = 75^{\circ}\text{C}$  (See Fig. 1)

## Ratings and Characteristic Curves ( $T_A = 25^{\circ}\text{C}$ unless otherwise noted)


**Fig. 1 – Maximum Continuous Power Dissipation**

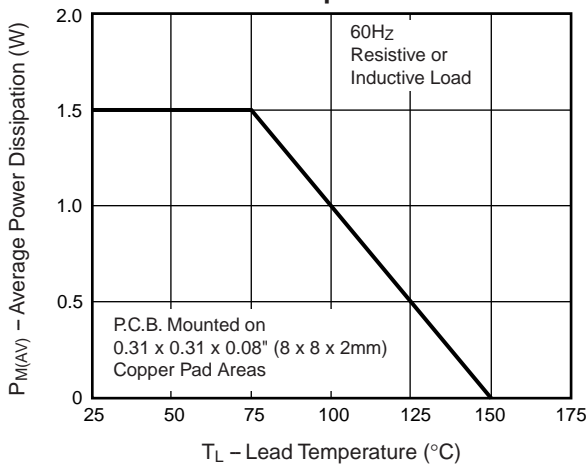


**Fig. 2 – Typical Zener Impedance**

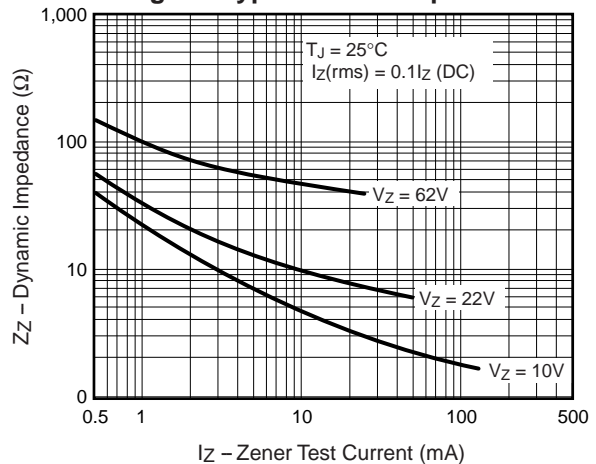

**Fig. 3 – Typical Zener Impedance**

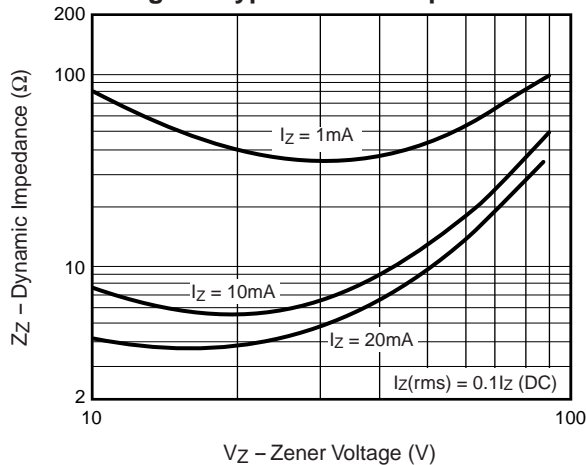

**Fig. 4 – Typical Temperature Coefficients**

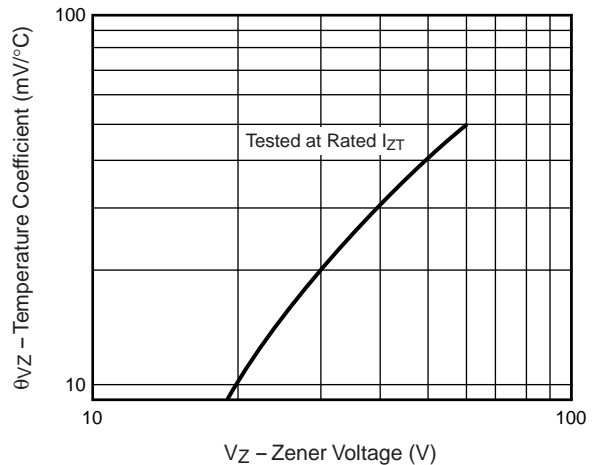



## **Notice**

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.