

F female Header 2.54mm



RoHS






Female Header 2.54mm H=8.5mm Elevated Press Fit Type

Specifications



Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Terminal: Copper Alloy
 Plating: Gold Plated

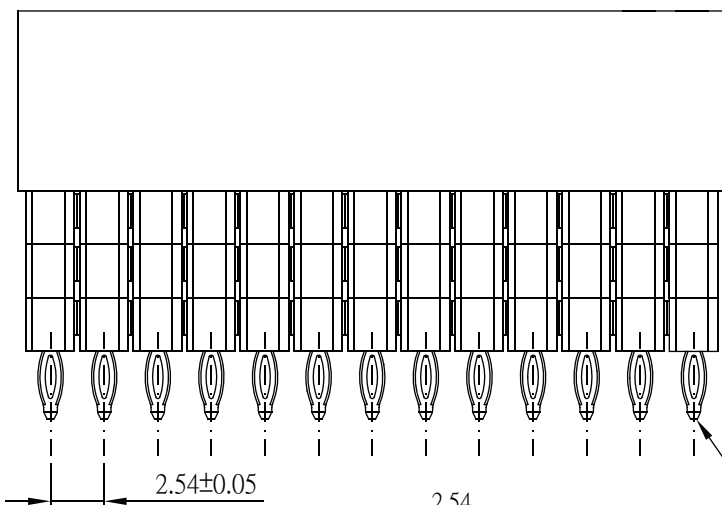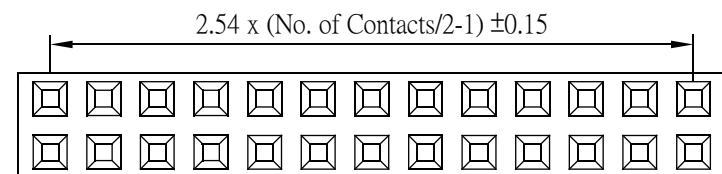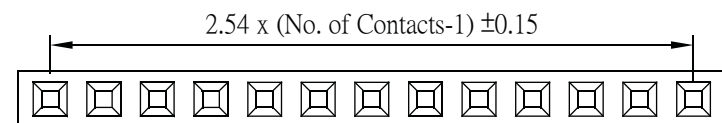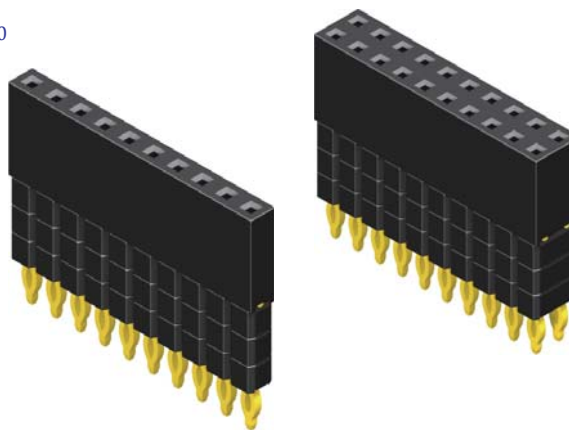


	Dim. A	Dim. B
1A	11.05	3.20
2A	13.59	3.20
3A	16.13	3.20
4A	18.67	3.20

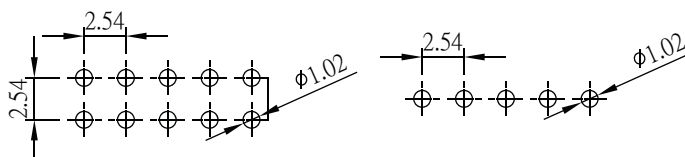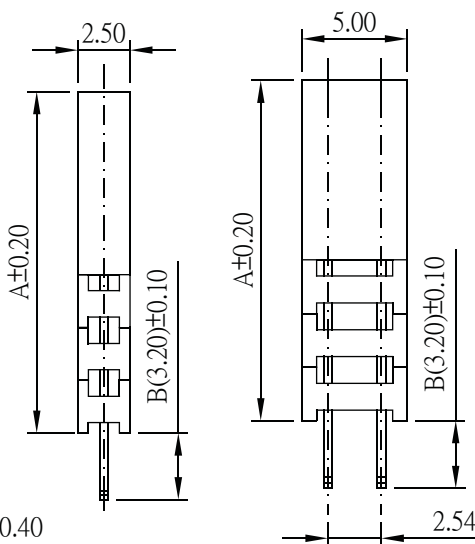

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

ORDER INFORMATION

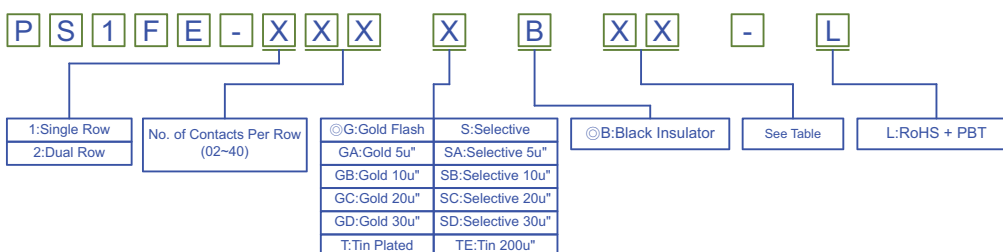

©Standard Recommended