


DBD CONNECTOR SYSTEM

D-SUB DIP S/T type




CURRENT RATING : 5A
 WITHSTANDING VOLTAGE : 1000VAC(1 MIN)
 INSULATION RESISTANCE : 1000 MEGOHMS MIN.
 CONTACT RESISTANCE : 30 MILLIOHMS MAX
 OPERATION TEMPERATURE : -40°C TO+85°C

CONTACT: BRASS, SELECTIVE GOLD OR ALL GOLD
 INSULATOR: PBT & 30% G.F.
 SHELL: STEEL, TIN PLATED



MALE

FEMALE

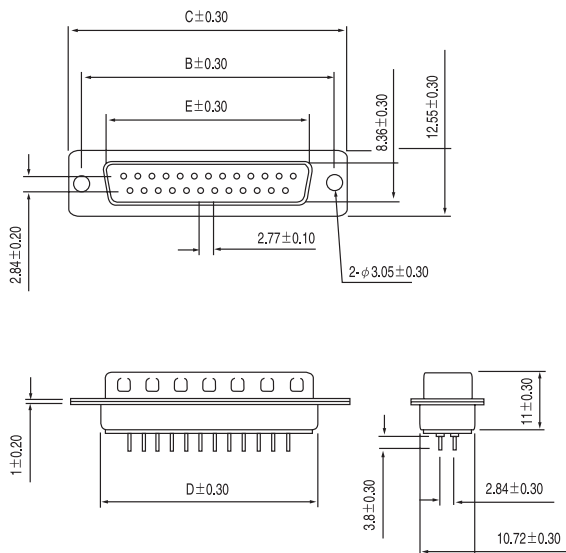

P	A	B	C	D	E
09	16.92	24.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.71	54.84
50	52.86	61.11	66.90	55.30	52.34

DBD - X - X - XX - X - XX

Series | Color: 1: Black, 3: Blue, 6: White | No. of Contact | Plating: X1: Selective Gold, A1: All Gold | Contact Type: P: Male, S: Female | Style: 1: W/o SCREW, 2: With SCREW

