


International IOR Rectifier **IRK.166,.196,.236..PbF SERIES**

STANDARD RECOVERY DIODES

NEW INT-A-pak Power Modules

Features

- High Voltage
- Electrically Isolated by DBC Ceramic (Al_2O_3)
- 3500 V_{RMS} Isolating Voltage
- Industrial Standard Package
- High Surge Capability
- Glass Passivated Chips
- Modules uses High Voltage Power diodes in four Basic Configurations
- Simple Mounting
- UL E78996 approved 
- TOTALLY LEAD-FREE

165 A
195 A
230 A

Applications

- DC Motor Control and Drives
- Battery Charges
- Welders
- Power Converters

Major Ratings and Characteristics

Parameters	IRK.166..	IRK.196..	IRK.236..	Units
$I_{F(AV)}$	165	195	230	A
@ T_C	100	100	100	°C
$I_{F(RMS)}$	260	305	360	A
I_{FSM} @ 50Hz	4000	4750	5500	A
@ 60Hz	4200	4980	5765	A
I^2t @ 50Hz	80	113	151	KA ² s
@ 60Hz	73	103	138	KA ² s
$I^2\sqrt{t}$	798	1130	1516	KA ² √s
V_{RRM}	400 to 1600			V
T_J range	-40 to 150			°C

CASE STYLE NEW INT-A-PAK



Electrical Specifications

Voltage Ratings

Type number	Voltage Code	V_{RRM} , Maximum repetitive peak reverse voltage V	V_{RSM} , Maximum non-repetitive peak reverse voltage V	I_{RRM} 150°C mA
IRK.166	04	400	500	20
IRK.196	08	800	900	
IRK.236	12	1200	1300	
	14	1400	1500	
	16	1600	1700	

Forward Conduction

Parameter	IRK.166	IRK.196	IRK.236	Units	Conditions
$I_{F(AV)}$ Max. average on-state current @ Case temperature	165	195	230	A	180° conduction, half sine wave
	100	100	100	°C	
$I_{F(RMS)}$ Max. RMS on-state current	260	305	360	A	
I_{FSM} Maximum peak, one-cycle on-state, non-repetitive surge current	4000	4750	5500	A	t = 10ms No voltage
	4200	4980	5765		t = 8.3ms reapplied
	3350	4000	4630		t = 10ms 100% V_{RRM}
	3500	4200	4850		t = 8.3ms reapplied
I^2t Maximum I^2t for fusing	80	113	151	KA ² s	t = 10ms No voltage
	73	103	138		t = 8.3ms reapplied
	56	80	107		t = 10ms 100% V_{RRM}
	52	73	98		t = 8.3ms reapplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	798	1130	1516	KA ² √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.73	0.69	0.7	V	(16.7% × π × $I_{F(AV)}$) < I < π × $I_{F(AV)}$, @ T_J max.
$V_{F(TO)2}$ High level value of threshold voltage	0.88	0.78	0.83	V	(I > π × $I_{F(AV)}$), @ T_J max.
r_{t1} Low level value on-state slope resistance	1.5	1.3	1.2	mΩ	(16.7% × π × $I_{F(AV)}$) < I < π × $I_{F(AV)}$, @ T_J max.
r_{t2} High level value on-state slope resistance	1.26	1.2	1.07	mΩ	(I > π × $I_{F(AV)}$), @ T_J max.
V_{FM} Maximum forward voltage drop	1.43	1.38	1.46	V	$I_{FM} = \pi \times I_{F(AV)}$, $T_J = 25^\circ\text{C}$, 180° conduction Av. power = $V_{F(TO)} \times I_{F(AV)} + r_f \times (I_{F(RMS)})^2$

Blocking

I_{RRM} Maximum peak reverse and off-state leakage current	20	mA	$T_J = 150^\circ\text{C}$
V_{INS} RMS isolation voltage	3500	V	50Hz, circuit to base, all terminals shorted, t = 1s

Thermal and Mechanical Specifications

Parameter	IRK.166	IRK.196	IRK.236	Units	Conditions
T _J Max. junction operating temperature range	-40 to 150			°C	
T _{stg} Max. storage temperature range	-40 to 150			°C	
R _{thJC} Max. thermal resistance, junction to case	0.2	0.16	0.14	K/W	DC operation, per junction
R _{thCS} Max. thermal resistance, case to heatsink	0.05			K/W	Mounting surface smooth, flat and greased Per module
T Mounting torque ± 10%	IAP to heatsink busbar to IAP			Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.
	4 to 6				
wt Approximate weight	200 (7.1)			g (oz)	
Case Style	New Int-A-Pak				

ΔR Conduction (per Junction)

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Devices	Sinusoidal conduction @ T _J max.					Rectangular conduction @ T _J max.					Units
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
IRK.166	0.025	0.03	0.038	0.055	0.089	0.018	0.031	0.041	0.057	0.089	K/W
IRK.196	0.016	0.019	0.024	0.034	0.053	0.012	0.02	0.026	0.035	0.054	
IRK.236	0.009	0.010	0.014	0.018	0.025	0.008	0.012	0.015	0.019	0.025	

Ordering Information Table

Device Code

IRK	D	236	/	16	PbF
①	②	③		④	⑤



- 1** - Module Type
- 2** - Circuit Configuration
- 3** - Current Rating: I_{F(AV)}
- 4** - Voltage Code: Code x 100 = V_{RRM}
- 5** - PbF = Lead-Free

IRK.166, .196, .236..PbF Series

Bulletin I27304 01/07

International
IOR Rectifier

Outline Table

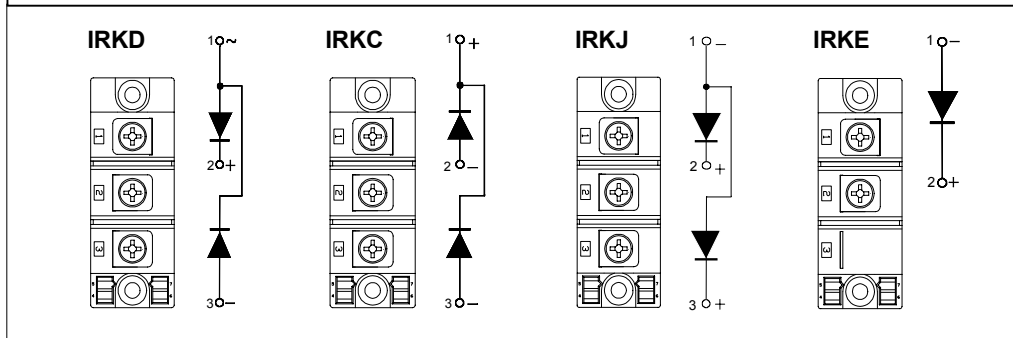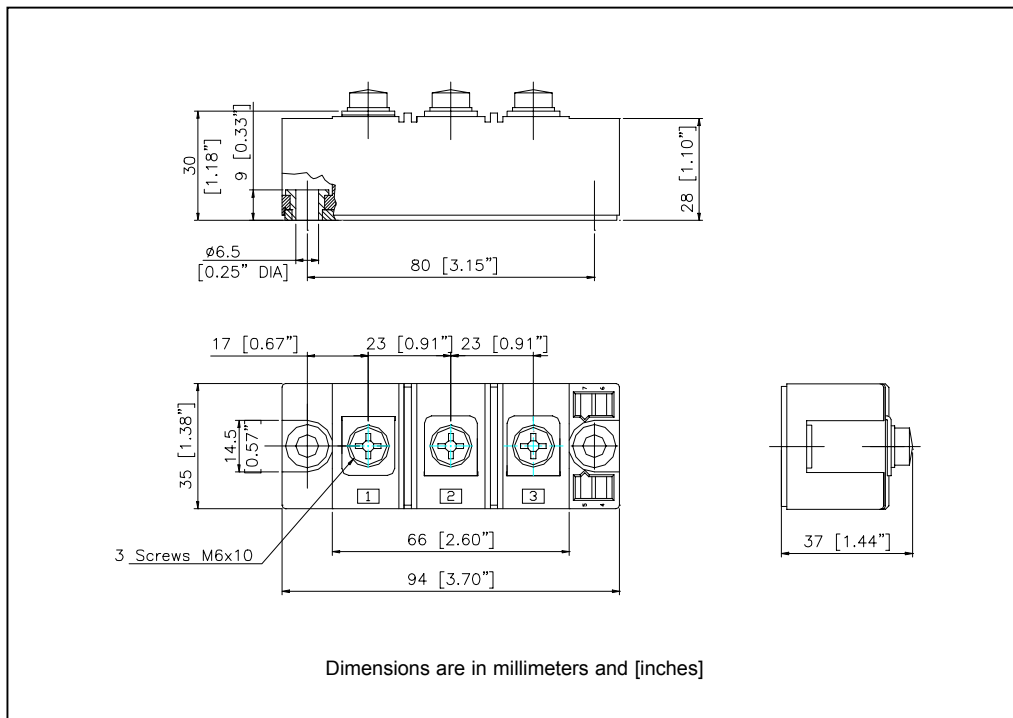

NOTE: To order the Optional Hardware see Bulletin I27900

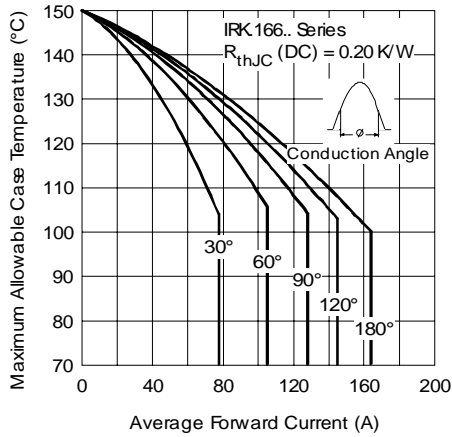


Fig. 1 - Current Ratings Characteristics

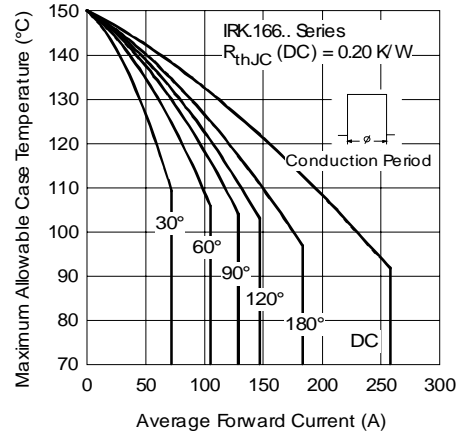


Fig. 2 - Current Ratings Characteristics

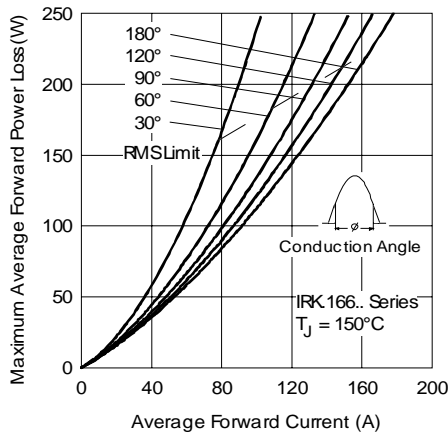


Fig. 3 - On-State Power Loss Characteristics

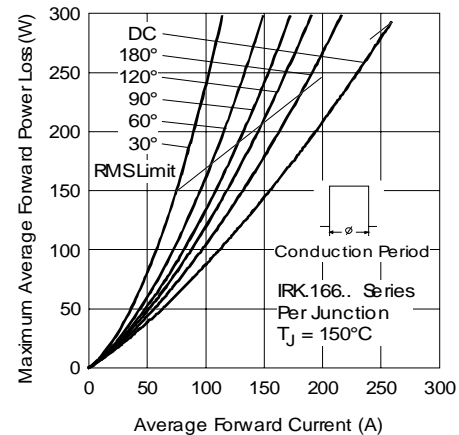


Fig. 4 - On-State Power Loss Characteristics

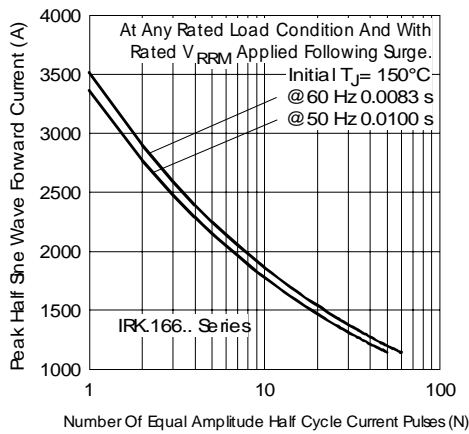


Fig. 5 - Maximum Non-Repetitive Surge Current

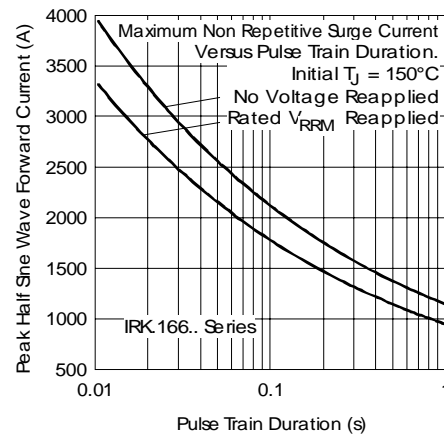


Fig. 6 - Maximum Non-Repetitive Surge Current

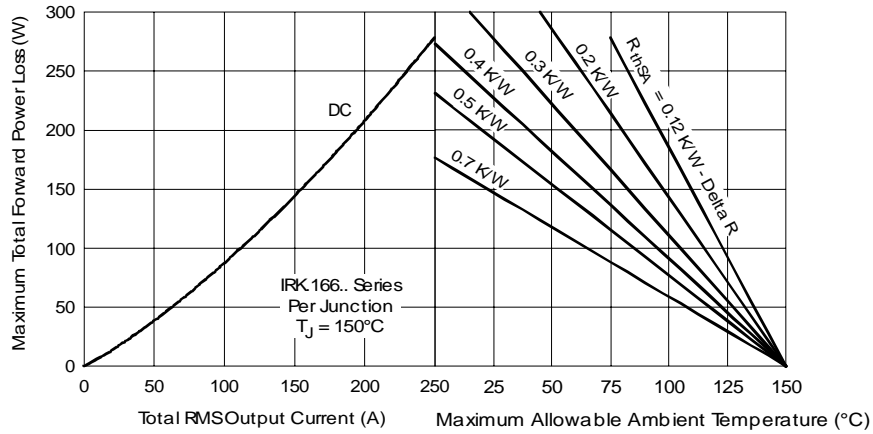


Fig.7 - On State Power Loss Characteristics

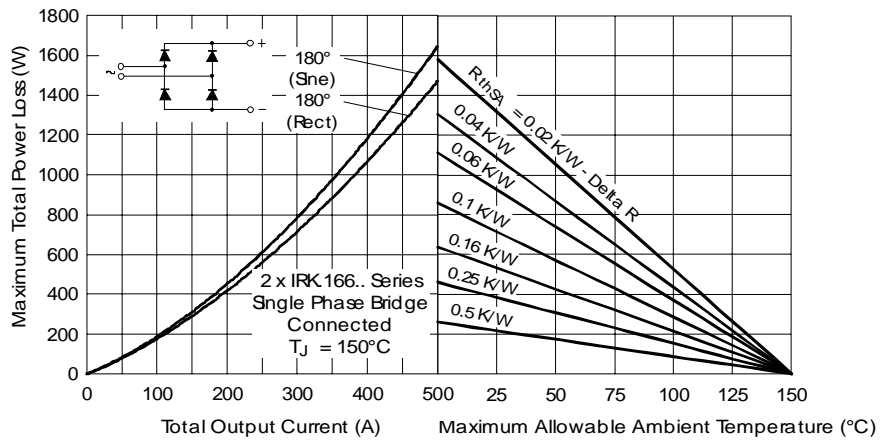


Fig.8 - On State Power Loss Characteristics

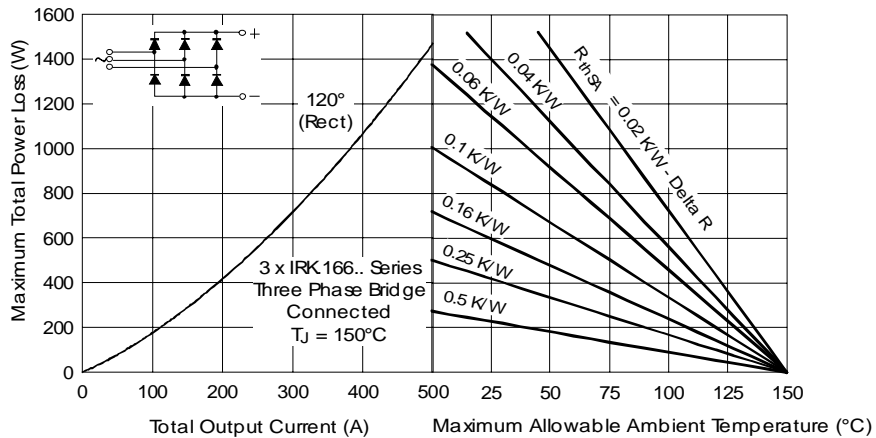


Fig.9 - On State Power Loss Characteristics

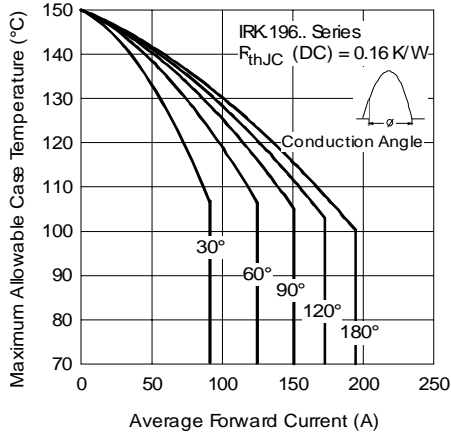


Fig. 10 - Current Ratings Characteristics

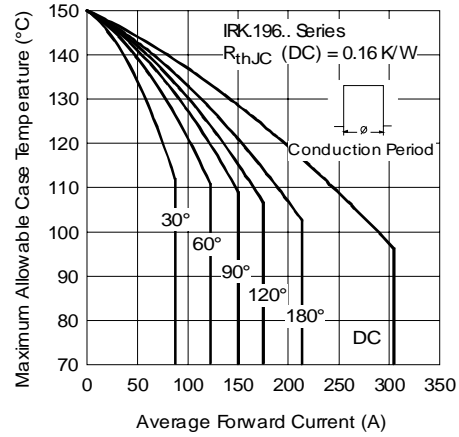


Fig. 11 - Current Ratings Characteristics

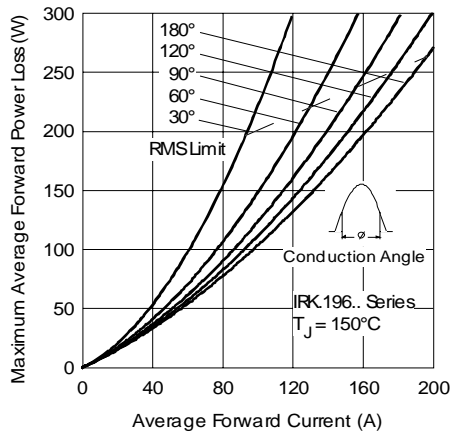


Fig. 12 - On-State Power Loss Characteristics

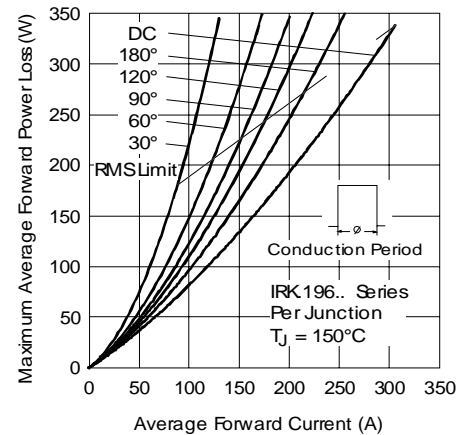


Fig. 13 - On-State Power Loss Characteristics

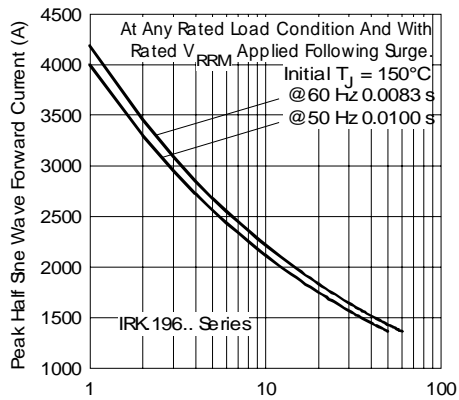


Fig. 14 - Maximum Non-Repetitive Surge Current

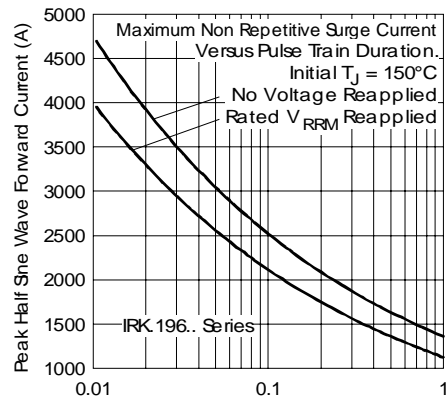


Fig. 15 - Maximum Non-Repetitive Surge Current

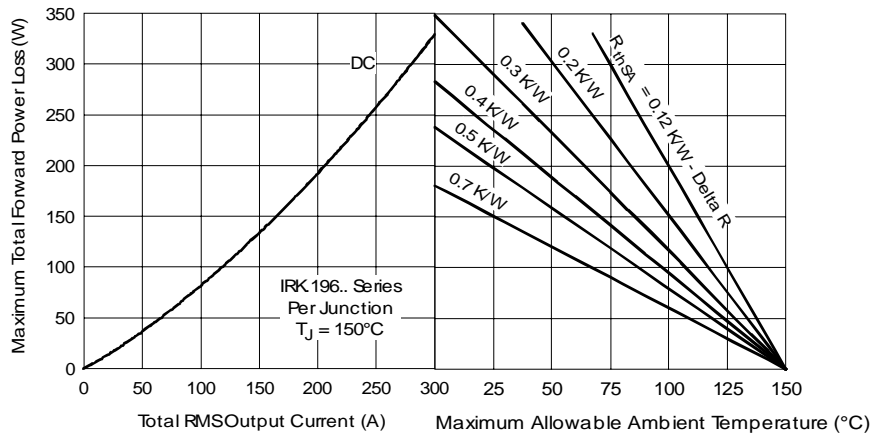


Fig.16 - On State Power Loss Characteristics

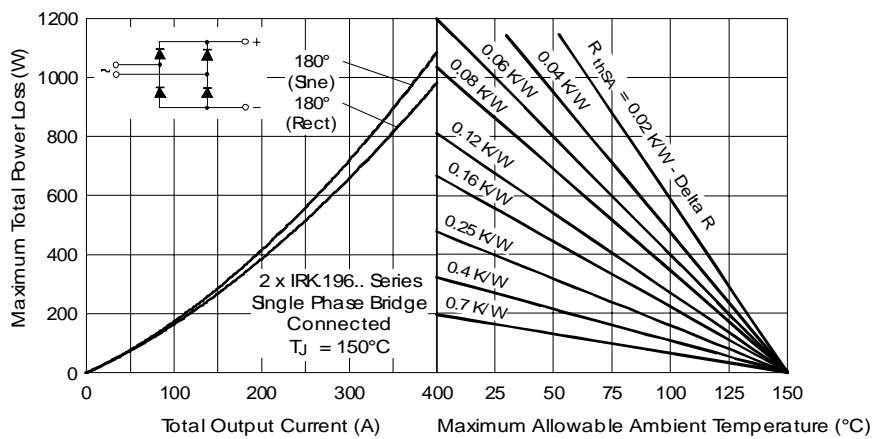


Fig.17 - On State Power Loss Characteristics

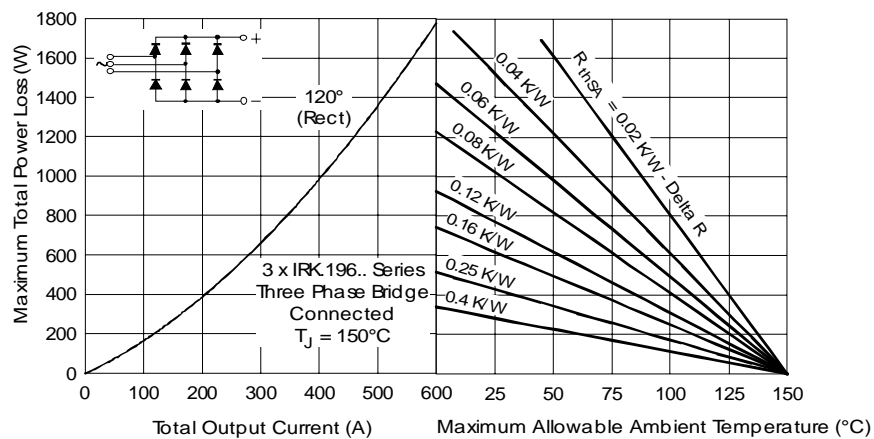


Fig.18- On State Power Loss Characteristics

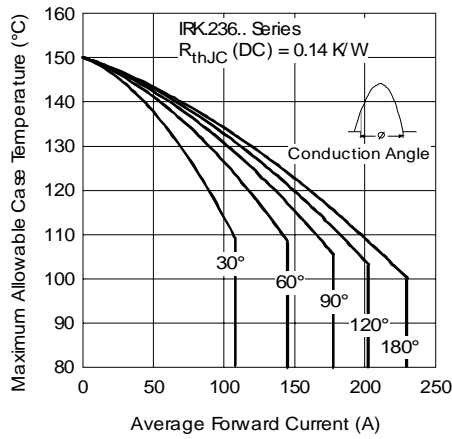


Fig. 19 - Current Ratings Characteristics

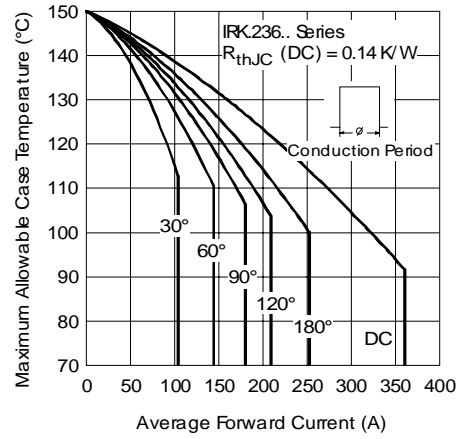


Fig. 20 - Current Ratings Characteristics

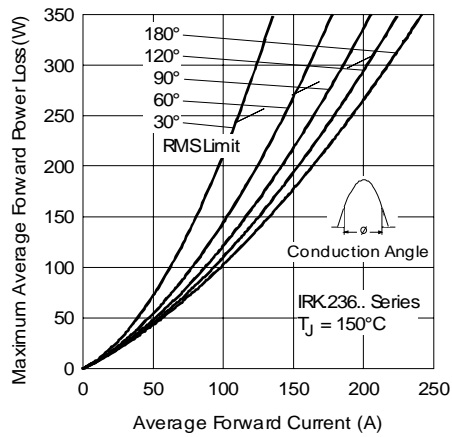


Fig. 21 - On-State Power Loss Characteristics

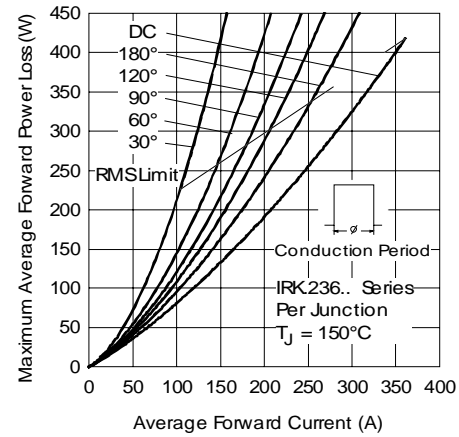


Fig. 22 - On-State Power Loss Characteristics

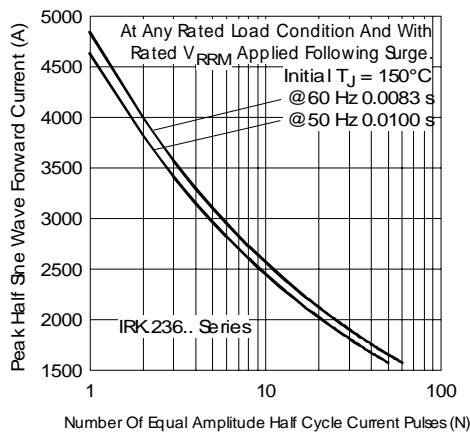


Fig. 23 - Maximum Non-Repetitive Surge Current

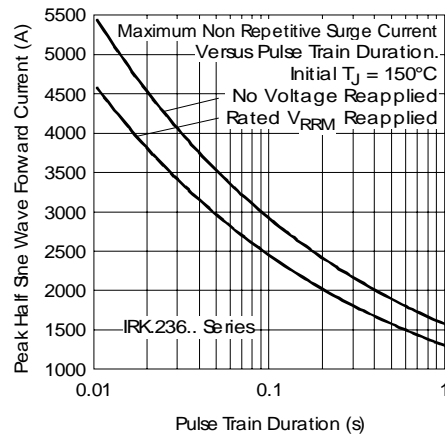


Fig. 24 - Maximum Non-Repetitive Surge Current

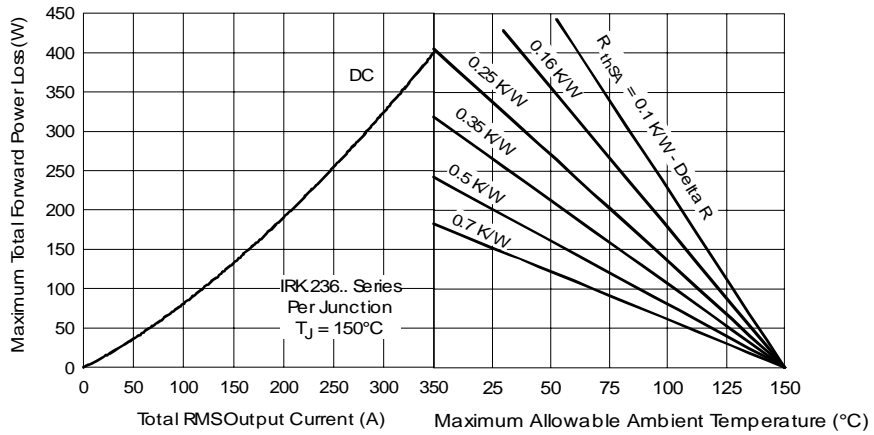


Fig.25 - On State Power Loss Characteristics

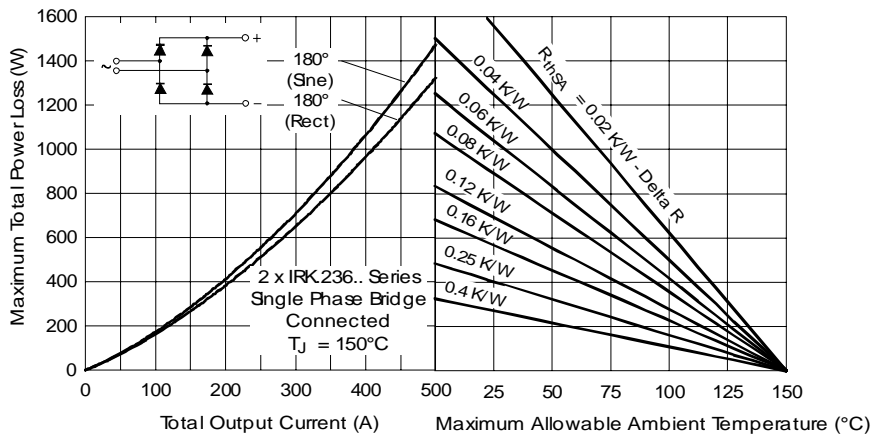


Fig.26 - On State Power Loss Characteristics

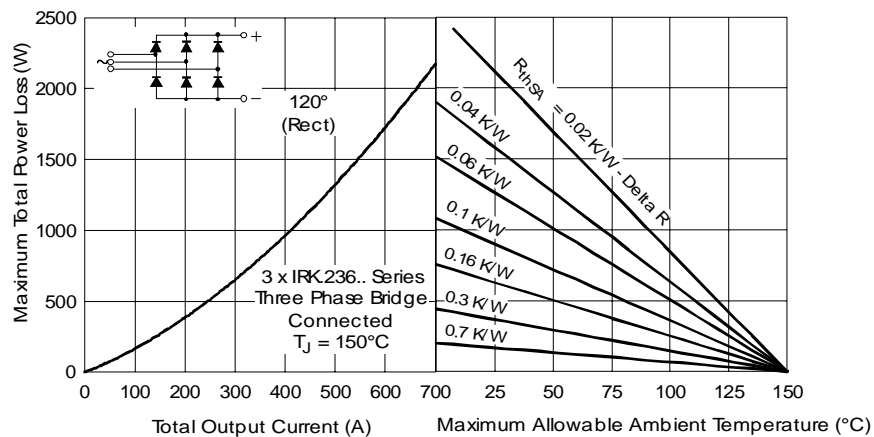


Fig.27 - On State Power Loss Characteristics

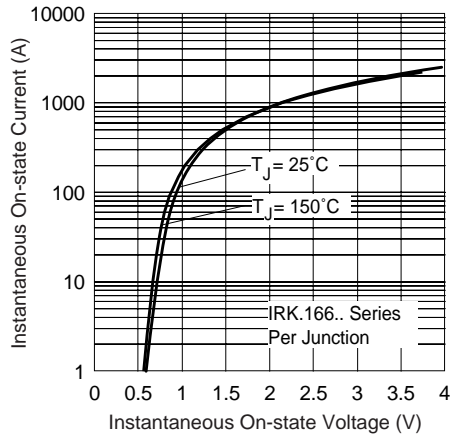


Fig.28 - On State Voltage Drop Characteristics

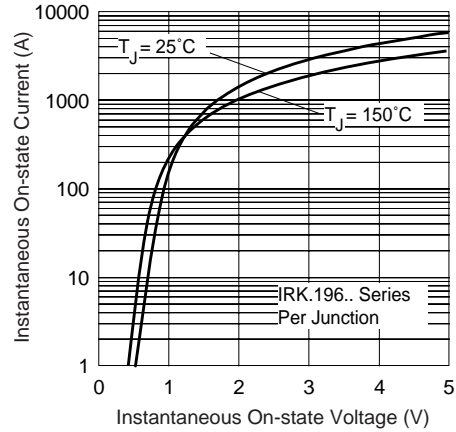


Fig.29 - On State Voltage Drop Characteristics

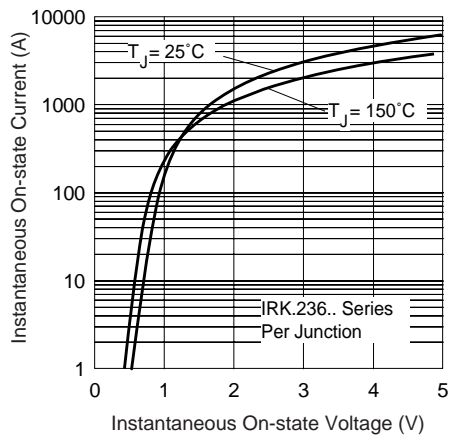


Fig.30 - On State Voltage Drop Characteristics

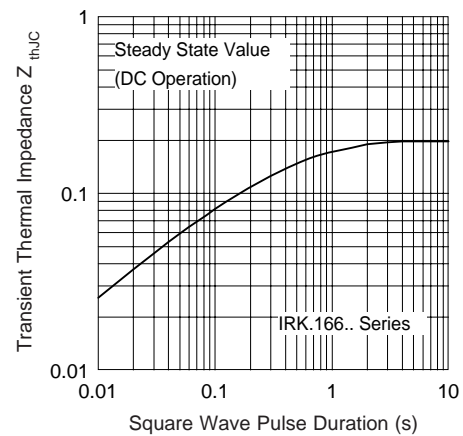


Fig.31 - Thermal Impedance Z_{thJC} Characteristics

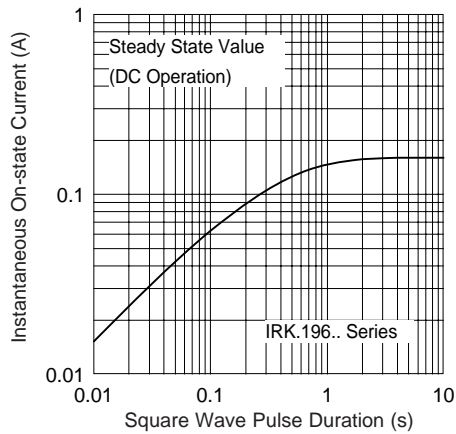


Fig.32 - Thermal Impedance Z_{thJC} Characteristics

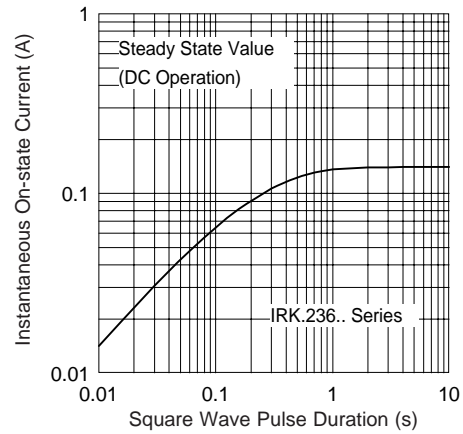


Fig.33 - Thermal Impedance Z_{thJC} Characteristics

IRK.166, .196, .236..PbF Series

Bulletin I27304 01/07

International
IOR Rectifier

Data and specifications subject to change without notice.
This product has been designed and qualified for Multiple Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
01/07



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.