


FAST RECOVERY DIODE

17.7A/300~400V/trr: 45nsec

C16T30F C16T40F
C16T40F-11A

- **SQUARE - PAK** TO-263AB (SMD)
Packaged in 24mm Tape and Reel : C16T••F
- Tabless TO-220:C16T40F-11A
- Dual Diodes - Cathode Common
- Ultra - Fast Recovery
- Low Forward Voltage Drop
- High Surge Capability
- 100 Volts thru 600 Volts Types Available

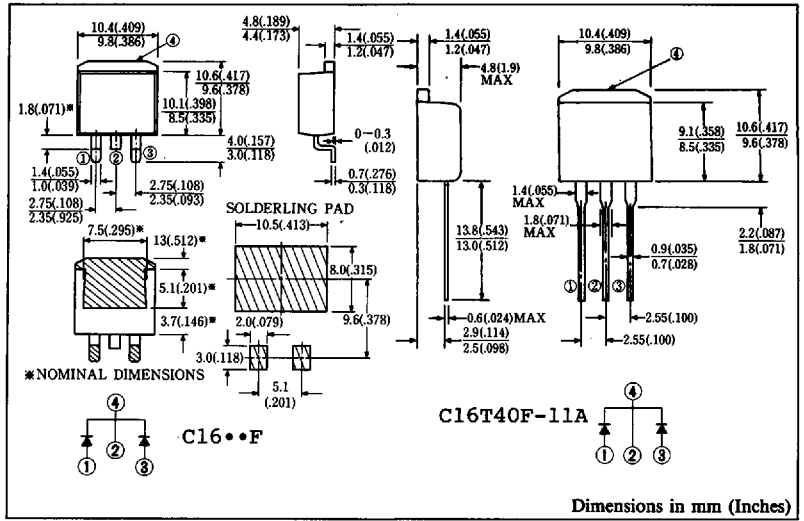

Approx. Net Weight: 1.4 Grams

1.75 Grams

MAXIMUM RATINGS

Voltage Rating	TYPE	♦ C16T30F	C16T40F C16T40F-11A	Unit
	Symbol			
Repetitive Peak Reverse Voltage	V_{RRM}	300	400	V
Non-Repetitive Peak Reverse Voltage	V_{RSM}	330	440	V
Electrical Rating	Symbol	Condition	Rating	Unit
Average Rectified Output Current	I_o	Full rectangular wave conduction $T_c = 101^\circ C$	17.7	A
		Full sinusoidal wave conduction $T_c = 109^\circ C$	16	
RMS Forward Current	$I_{F(RMS)}$		18	A
Peak One-cycle Forward Surge Current	I_{FSM}	50Hz full sine wave, non-repetitive	120	A
Operating Junction Temperature Range	T_{jw}		-40 to 150	$^\circ C$
Storage Temperature Range	T_{stg}		-40 to 150	$^\circ C$

ELECTRICAL & THERMAL CHARACTERISTICS

Characteristics	Symbol	Test Condition	Max.	Unit
Peak Forward Voltage	V_{FM}	$I_{FM} = 8A$ $T_j = 25^\circ C$ per diode leg	1.25	V
Peak Reverse Current	I_{RM}	$V_{RM} = V_{RRM}$ $T_j = 25^\circ C$ per diode leg	30	μA
Reverse Recovery Time	t_{rr}	$I_{FM} = 8A$ $-di/dt = 50A/\mu s$ $T_j = 25^\circ C$	45	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	2	$^\circ C/W$

♦ For spare parts only

6615123 0002241 083

FIG.1-FORWARD VOLTAGE
VS. FORWARD CURRENT

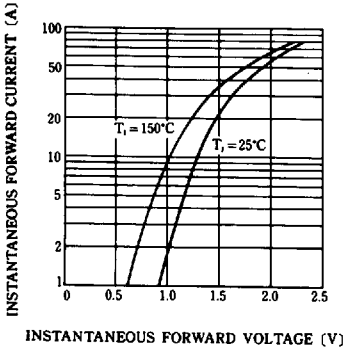


FIG.2-AVERAGE FORWARD
POWER DISSIPATION




FIG.3-AVERAGE FORWARD CURRENT
VS. CASE TEMPERATURE


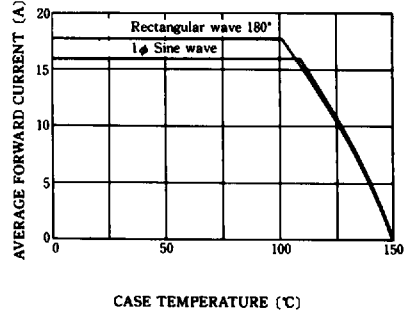


FIG.4-SURGE CURRENT RATINGS

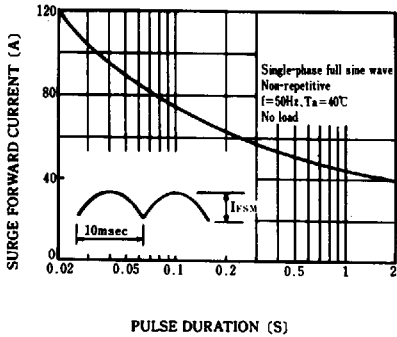

F