

MATERIAL:  
 \* Contact: Brass  
 \* Insulator: UL 94V-2 Nylon 6/6

2405S\*\*V\*00  
 1 2





RoHS COMPLIANT

1. No. Of Circuits

2. Plating:

O=Tin plated 120u"min. over 30u"min. nickel overall

U=Gold flash over 30u"min. nickel overall

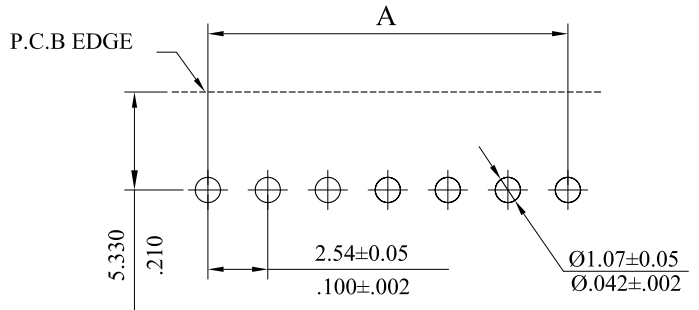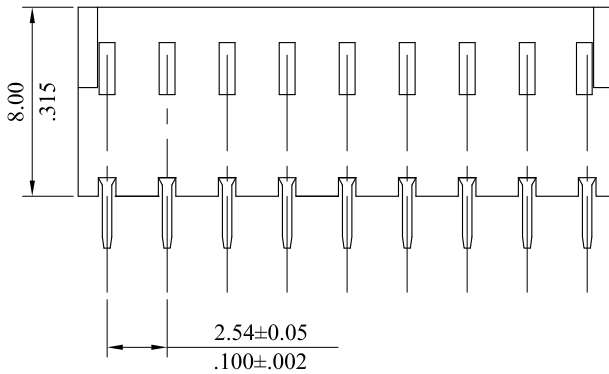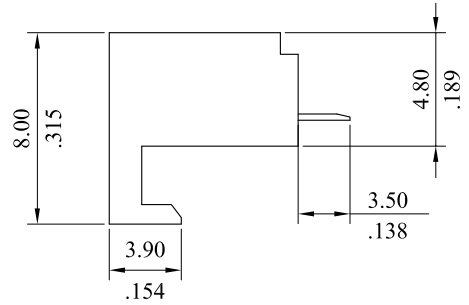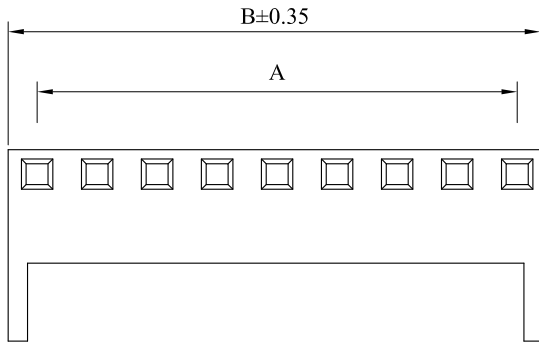

P.C.B LAYOUT

CIRCUITS	PART NO.	DIM. A	DIM. B	CIRCUITS	PART NO.	DIM. A	DIM. B
2	2405S02V*00	2.54(.100)	5.10(.201)	12	2405S12V*00	27.94(1.100)	30.50(1.201)
3	2405S03V*00	5.08(.200)	7.64(.301)	13	2405S13V*00	30.48(1.200)	33.04(1.301)
4	2405S04V*00	7.62(.300)	10.18(.401)	14	2405S14V*00	33.02(1.300)	35.58(1.401)
5	2405S05V*00	10.16(.400)	12.72(.501)	15	2405S15V*00	35.56(1.400)	38.12(1.501)
6	2405S06V*00	12.70(.500)	15.26(.601)	16	2405S16V*00	38.10(1.500)	40.66(1.601)
7	2405S07V*00	15.24(.600)	17.80(.701)	17	2405S17V*00	40.64(1.600)	43.20(1.701)
8	2405S08V*00	17.78(.700)	20.34(.801)	18	2405S18V*00	43.18(1.700)	45.74(1.801)
9	2405S09V*00	20.32(.800)	22.88(.901)	19	2405S19V*00	45.72(1.800)	48.28(1.901)
10	2405S10V*00	22.86(.900)	25.42(1.001)	20	2405S20V*00	48.26(1.900)	50.82(2.001)
11	2405S11V*00	25.40(1.000)	27.96(1.101)				

				LEOCO CORPORATION		APPROVED:		PART NO.: 2405S**V*00																		
D	ES101254			GENERAL TOLERANCES: (UNLESS SPECIFIED)		DATE:		TITLE: 2.54mm PCB CONNECTOR																		
C	ES071009					CHECKED:																				
B	ES050401			<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td>1 PLACE</td> <td>± 0.30</td> <td>± --</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.20</td> <td>± .012</td> </tr> <tr> <td>3 PLACES</td> <td>± 0.10</td> <td>± .008</td> </tr> <tr> <td>4 PLACES</td> <td>± --</td> <td>± .004</td> </tr> </tbody> </table>			mm	inch	1 PLACE	± 0.30	± --	2 PLACES	± 0.20	± .012	3 PLACES	± 0.10	± .008	4 PLACES	± --	± .004	DATE:		DRAWING NO.: 240501S			
	mm	inch																								
1 PLACE	± 0.30	± --																								
2 PLACES	± 0.20	± .012																								
3 PLACES	± 0.10	± .008																								
4 PLACES	± --	± .004																								
A	DWG REL			DRAWN:																						
REV.	ECO. NO.	CHG.	APP.	ANGULAR ± ( 1° )		DATE:		<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>UNITS</th> <th>SCALE</th> <th>SIZE</th> <th>SHEET</th> <th>REV.</th> </tr> </thead> <tbody> <tr> <td> mm inch</td> <td>3:1</td> <td>A4</td> <td>1/1</td> <td>D</td> </tr> </tbody> </table>				UNITS	SCALE	SIZE	SHEET	REV.	mm inch	3:1	A4	1/1	D					
UNITS	SCALE	SIZE	SHEET	REV.																						
mm inch	3:1	A4	1/1	D																						