

400 WATT TRANSIENT VOLTAGE TZB-SERIES SUPPRESSOR DIODES

5.5V to 342V V_R
(B CASE)

FEATURES:

- 400 Watts Peak Power – 1 ms
- 1 Watt D.C. Power @ 75°C Lead Temp.
- Superfast Response (1×10^{-12} sec.)
- High Temperature Operation
- Low Clamping Voltage
- Metallurgically Bonded

DESCRIPTION

... a low cost commercial product for use in applications where large voltage transients can permanently damage voltage-sensitive components. This series has a peak pulse power rating of 400 watts for one millisecond. The response time of the clamping action of these devices is theoretically instantaneous (1×10^{-12} sec); therefore, they are designed to protect integrated Circuits, MOS devices, Hybrids, and other voltage-sensitive semiconductors and components. This series of devices can also be used in series or parallel to increase the peak power ratings.

MAXIMUM RATINGS: (See Notes)

Maximum Temperatures

Ambient Storage and Operating Range	T _{stg T_A}	-65°C to +175°C
Lead Temperature (For soldering 1/16 inch from case for 10 sec.)		230°C

Maximum Power

Peak Power Dissipation (1.0 msec pulse width, T _A = 25°C, Fig. 4)	P _P	400 Watts
DC Power Dissipation (T _L @ 3/8" from body = 75°C)	P _M	1.0 Watt

Maximum Currents

Maximum Pulse Current	I _{PP}	See Table (Note 2)
-----------------------	-----------------	--------------------


Peak Forward One-Cycle Surge Current (1/2 60 Hz sine wave)	I _{FSM}	50.0 Amps (Note 3)
T _A = 25°C		

Maximum Forward Voltage	V _F	1.2 Volts
T _A = 25°C @ 1.0 Amps DC		

Notes:


- (1) Exceeding these ratings may impair operation of the semiconductor device.
- (2) The applied current pulse is as shown in the "Pulse Current vs. Time" plot. Maximum Rate of Applications is 2 pulses per minute.
- (3) The applied current is 1/2 cycle of a 60 Hz waveform, with a maximum rate of application of 4 pulses per minute.

FIG 1

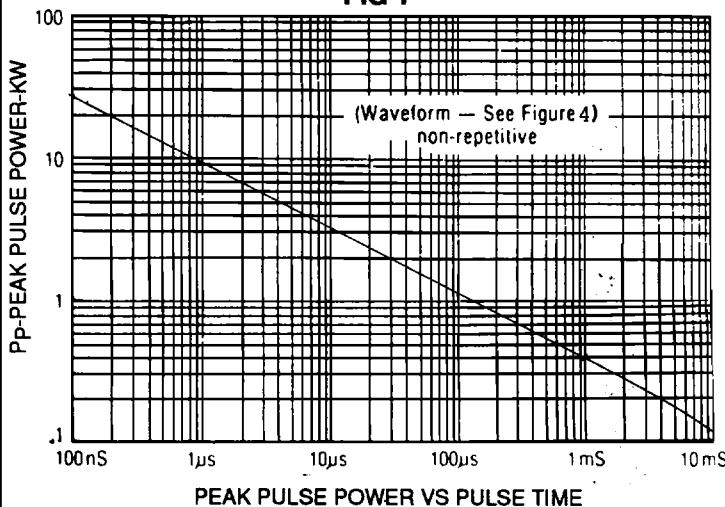

PEAK PULSE POWER VS PULSE TIME

FIG 2

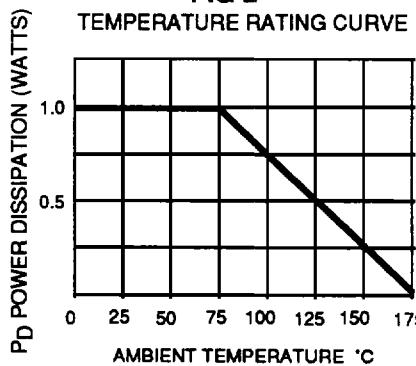

TEMPERATURE RATING CURVE

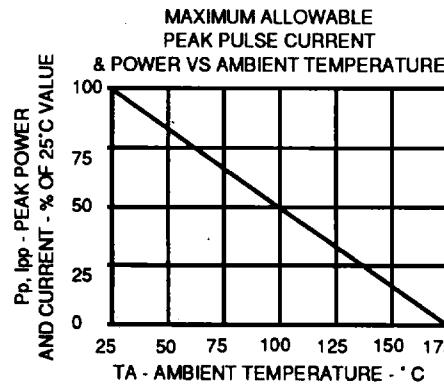


FIG 3

MAXIMUM ALLOWABLE
PEAK PULSE CURRENT


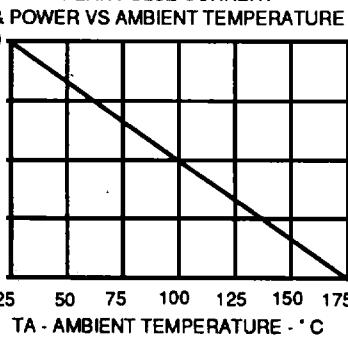


FIG 4

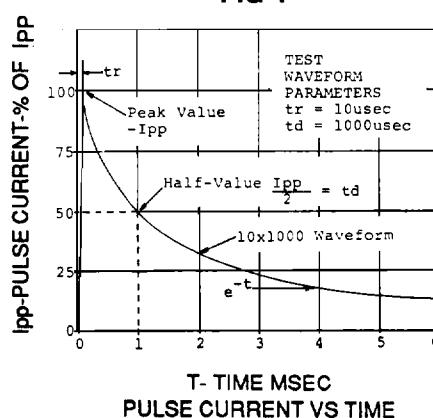

ELECTRICAL CHARACTERISTICS at 25°C

TYPE NUMBER	(Note1) REVERSE STAND-OFF VOLTAGE V _R VOLTS	BREAKDOWN VOLTAGE @ BV		I _T mA	MAXIMUM CLAMPING VOLTAGE @ I _{PP} (1 mSEC) V _C VOLTS	MAXIMUM REVERSE LEAKAGE @ V _R I _R μA	MAXIMUM PEAK PULSE CURRENT I _{PP} A	MAXIMUM TEMPERATURE COEFFICIENT OF BV %/°C
		MIN	MAX					
• TZB6.8A	5.50	6.12	7.48	10	10.8	500	37	.057
• TZB6.8B	5.80	6.45	7.14	10	10.5	500	38	.057
• TZB7.5A	6.05	6.75	8.25	10	11.7	200	34	.061
• TZB7.5B	6.40	7.13	7.88	10	11.3	200	35	.061
• TZB8.2A	6.63	7.38	9.02	10	12.5	100	32	.065
• TZB8.2B	7.02	7.79	8.61	10	12.1	100	33	.065
• TZB9.1A	7.37	8.19	10.0	1	13.8	20	29	.068
• TZB9.1B	7.78	8.65	9.55	1	13.4	20	30	.068
• TZB10A	8.10	9.00	11.0	1	15.0	20	27	.073
• TZB10B	8.55	9.5	10.5	1	14.5	5	28	.073
• TZB11A	8.92	9.9	12.1	1	16.2	2	25	.075
• TZB11B	9.40	10.5	11.6	1	15.6	2	26	.075
TZB12A	9.72	10.8	13.2	1	17.3	2	23	.078
TZB12B	10.2	11.4	12.8	1	16.7	2	24	.078
TZB13A	10.5	11.7	14.3	1	19.0	2	21	.081
TZB13B	11.1	12.4	13.7	1	18.2	2	22	.081
TZB15A	12.1	13.5	16.5	1	22.0	18	.064	
TZB15B	12.8	14.3	15.8	1	21.2	22	19	.064
TZB16A	12.9	14.4	17.6	1	23.5	2	17	.066
TZB16B	13.6	15.2	16.8	1	22.5	2	18	.066
TZB18A	14.5	16.2	19.8	1	26.5	2	15	.088
TZB18B	15.3	17.1	18.0	1	25.2	2	16	.088
TZB20A	16.2	18.0	22.0	1	29.1	2	14	.090
TZB20B	17.1	19.0	21.0	1	27.7	2	14.5	.090
TZB22A	17.8	19.8	24.2	1	31.9	2	12.5	.092
TZB22B	18.8	20.9	23.1	1	30.6	2	13	.092
TZB24A	19.4	21.6	26.4	1	34.7	2	11.5	.094
TZB24B	20.5	22.8	25.2	1	33.2	2	12	.094
TZB27A	21.8	24.3	29.7	1	39.1	2	10	.096
TZB27B	23.1	25.7	28.4	1	37.5	2	11	.096
TZB30A	24.3	27.0	33.0	1	43.5	2	9.0	.097
TZB30B	25.8	28.5	31.5	1	41.4	2	9.5	.097
TZB33A	26.8	29.7	36.3	1	47.7	2	8.5	.098
TZB33B	28.2	31.4	34.7	1	45.7	2	9.0	.098
TZB36A	29.1	32.4	39.6	1	52.0	2	7.5	.099
TZB36B	30.8	34.2	37.8	1	49.9	2	8.0	.099
TZB39A	31.6	35.1	42.9	1	56.4	2	7.0	.100
TZB39B	33.3	37.1	41.0	1	53.9	2	7.5	.100
TZB43A	34.8	38.7	47.3	1	61.9	2	6.5	.101
TZB43B	36.8	40.9	45.2	1	58.3	2	7.0	.101
TZB47A	38.1	42.3	51.7	1	67.8	2	5.9	.101
TZB47B	40.2	44.7	49.4	1	64.8	2	6.2	.101
TZB51A	41.3	45.9	56.1	1	73.5	2	5.4	.102
TZB51B	42.6	48.5	53.6	1	70.1	2	5.7	.102
TZB56A	45.4	50.4	61.6	1	80.5	2	5.0	.103
TZB56B	47.8	53.2	58.8	1	77.0	2	5.2	.103
TZB62A	50.2	55.8	68.2	1	89.0	2	4.5	.104
TZB62B	53.0	58.9	65.1	1	85.0	2	4.7	.104
TZB68A	55.1	61.2	74.8	1	98.0	2	4.1	.104
TZB68B	58.1	64.6	71.4	1	92.0	2	4.4	.104
TZB75A	60.7	67.5	82.5	1	108.0	2	3.7	.105
TZB75B	64.1	71.3	78.8	1	103.0	2	3.9	.105
TZB82A	66.4	73.8	90.2	1	118.0	2	3.4	.105
TZB82B	70.1	77.9	86.1	1	113.0	2	3.5	.105
TZB91A	73.7	81.9	100.0	1	131.0	2	3.1	.106
TZB91B	77.8	86.5	95.5	1	125.0	2	3.2	.106
TZB100A	81.0	90.0	110.0	1	144.0	2	2.8	.106
TZB100B	85.5	95.0	105.0	1	137.0	2	2.9	.106
TZB110A	89.2	99.0	121.0	1	158.0	2	2.5	.107
TZB110B	94.0	105.0	116.0	1	152.0	2	2.6	.107
TZB120A	97.2	108.0	132.0	1	173.0	2	2.3	.107
TZB120B	102.0	114.0	126.0	1	165.0	2	2.4	.107
TZB130A	105.0	117.0	143.0	1	187.0	2	2.1	.107
TZB130B	111.0	124.0	137.0	1	179.0	2	2.2	.107
TZB150A	121.0	135.0	165.0	1	215.0	2	1.9	.108
TZB150B	128.0	143.0	158.0	1	207.0	2	1.95	.108
TZB160A	130.0	144.0	176.0	1	230.0	2	1.7	.108
TZB160B	136.0	152.0	168.0	1	219.0	2	1.8	.108
TZB170A	138.0	153.0	187.0	1	244.0	2	1.6	.108
TZB170B	145.0	162.0	179.0	1	234.0	2	1.7	.108
TZB180A	146.0	162.0	198.0	1	258.0	2	1.5	.108
TZB180B	154.0	171.0	189.0	1	246.0	2	1.6	.108
TZB200A	162.0	180.0	220.0	1	287.0	2	1.4	.108
TZB200B	171.0	190.0	210.0	1	274.0	2	1.5	.108
TZB220A	175.0	198.0	242.0	1	344.0	2	1.0	.110
TZB220B	185.0	209.0	231.0	1	328.0	2	1.0	.110
TZB250A	202.0	225.0	275.0	1	380.0	2	1.0	.110
TZB250B	214.0	237.0	263.0	1	344.0	2	1.0	.110
TZB300A	243.0	270.0	330.0	1	430.0	2	1.0	.110
TZB300B	256.0	285.0	315.0	1	414.0	2	1.0	.110
TZB350A	284.0	315.0	385.0	1	504.0	2	1.0	.110
TZB350B	300.0	333.0	368.0	1	482.0	2	1.0	.110
TZB400A	324.0	360.0	440.0	1	574.0	2	1.0	.110
TZB400B	342.0	380.0	420.0	1	548.0	2	1.0	.110

NOTES

1 - Available as Bi-Polar (Add Suffix "C" to Part Number)
2 - Clamping Voltage 1.3 x Max. BV (Approx.)

*I_R Double for Bi-Polar Types