



Crimp-Rast Buchsengehäuse RM 4,20mm Friction Lock Female Header Pitch 4,20mm

Technische Daten / Technical Data





Isolierkörper	Thermoplastischer Kunststoff, nach UL94 V-0
Insulator	Thermoplastic, rated UL94 V-0
Kontaktmaterial	Messing
Contact Material	Brass
Kontaktfläche	Lt. Oberflächenoptionen, über Ni (1,3 ... 2,5µm)
Contact Surface	Acc. to options (see below), over Ni (1,3 ... 2,5µm)
Aderquerschnitt	Lt. Optionen
Applicable wire Gauge	Lt. Optionen
Durchgangswiderstand	< 20mΩ
Contact Resistance	< 20mΩ
Isolationswiderstand	> 10 ⁹ Ω
Insulation Resistance	> 10 ⁹ Ω
Spannungsfestigkeit	1500V _{AC}
Test Voltage	1500V _{AC}
Nennstrom	9A
Current Rating	9A
Temperaturbereich	-40°C ... +105°C
Temperature Range	-40°C ... +105°C

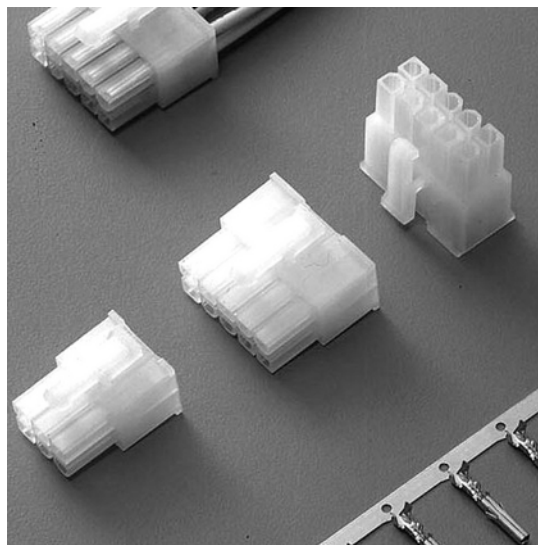


© W+P PRODUCTS

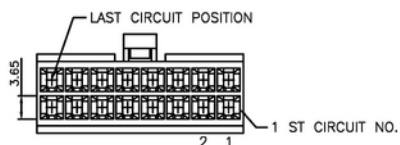

Wire Application	A	B	C	D
16AWG-22AWG	3.70	4.4	2.5	2.4
24AWG-26AWG	3.4	3.3	2.5	2.3

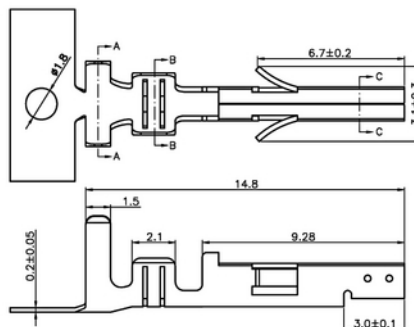

Pos	Dim.A	Dim.B	Pos	Dim.A	Dim.B
2		5.50	14	25.20	30.70
4	4.20	9.70	16	29.40	34.90
6	8.40	13.90	18	33.60	39.10
8	12.60	18.10	20	37.80	43.30
10	16.80	22.30	22	42.00	47.50
12	21.00	26.50	24	46.20	51.70

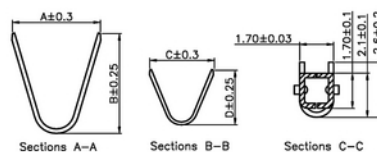

Series

580

Contacts*

20

02-24 Zweireihig
Double row

Type

1

1 Gehäuse
Housing

Series

580

Contacts

01

Type

2

2 Buchsenkontakt
Female contact

Plating

50

50 Verzinkt
Tin plated

Wire Gauge*

1622

1822 AWG 18-22
2224 AWG 22-24

(* Bestellbeispiel - Bitte durch Ihre Spezifikationen ersetzen.

* Order example - To be replaced by your specifications.)

TEL.: +49 5223 98507-0
FAX.: +49 5223 98507-50

W+P PRODUCTS

E-MAIL: sales@wppro.com
INTERNET: www.wppro.com