

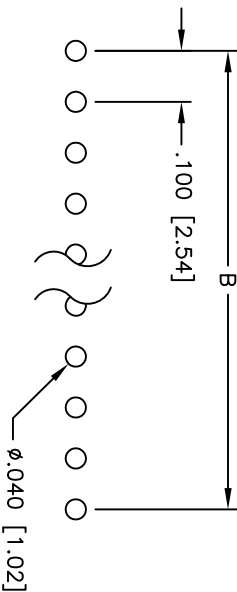
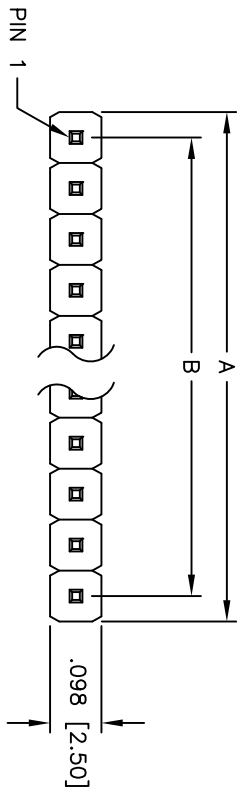


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/11	

APPROVED: _____
DATE: _____ TITLE: _____



Recommended PCB Layout

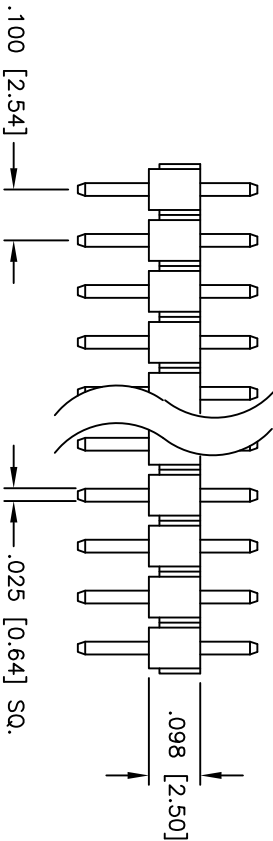

SPECIFICATIONS:

Material: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall
Electrical:
Current rating: 3 Amps
Contact resistance: 20 mohms max @ DC 100mA
Insulation resistance: 5,000 Mohms min @ DC 500V
Dielectric voltage: AC 500V for 1 minute
Temperature Rating:
Operating temperature: -55°C to +105°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds

Positions: 1 thru 40
A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.100 [2.54] SINGLE ROW PIN HEADER

GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE	
.X INCHES ± .10	ØXX HOLE ± .10	.100 [2.54] SINGLE ROW PIN HEADER	
.XX ± .020	ØXXX ± .015	GOLD PLATED	
.XXX ± .015	ØXXX ± .010	ADAM TECH	
APPROVALS	DATE	909 Rahway Avenue, Union, NJ 07083	
DRAWN	DRY	Phone: 908-687-5000 Fax: 908-687-5710	
CHECKED		.100 [2.54] SINGLE ROW PIN HEADER	
APPROVED		GOLD PLATED	
SIZE		PART NO.	
X		PH1-XX-U-.157/.355	
REF:		S00039T	
SCALE:		NTS	
SHEET		1 OF 1	

