

CZSH10-40C

**SURFACE MOUNT
DUAL, COMMON CATHODE SILICON
SCHOTTKY POWER RECTIFIER
10 AMP, 40 VOLTS**



SOT-223 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CZSH10-40C is manufactured with two 5 Amp Schottky rectifiers assembled in a common cathode configuration and packaged in a SOT-223 case. This device has been designed for use in all types of commercial, industrial, entertainment, computer and automotive applications which require a high current device.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	40	V
DC Blocking Voltage	V_R	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	28	V
Average Forward Current ($T_A=75^\circ\text{C}$)	I_O	10	A
Peak Forward Surge Current, $t_p=8.3\text{ms}$	I_{FSM}	125	A
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS PER DIODE: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MAX	UNITS
I_R	$V_R=40\text{V}$	3.0	mA
I_R	$V_R=40\text{V}, T_A=100^\circ\text{C}$	20	mA
V_F	$I_F=5.0\text{A}$	0.55	V
V_F^*	$I_F=10\text{A}$	0.60	V

* With pin 1 and pin 3 connected together.



R0 (22-November 2010)

CZSH10-40C

**SURFACE MOUNT
DUAL, COMMON CATHODE SILICON
SCHOTTKY POWER RECTIFIER
10 AMP, 40 VOLTS**




SOT-223 CASE - MECHANICAL OUTLINE

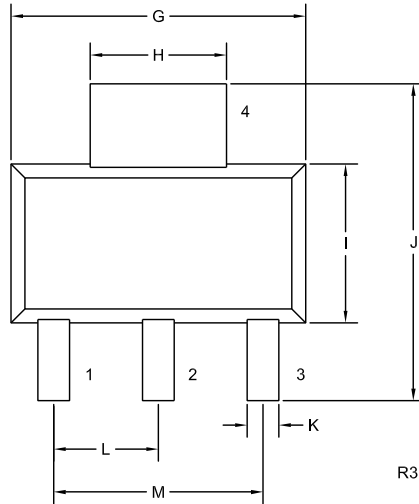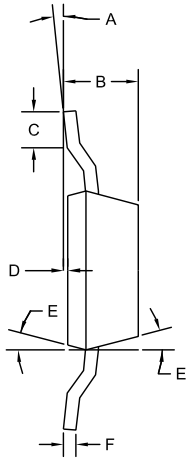

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0°	10°	0°	10°
B	0.059	0.071	1.50	1.80
C	0.018	—	0.45	—
D	0.000	0.004	0.00	0.10
E	15°		15°	
F	0.009	0.014	0.23	0.35
G	0.248	0.264	6.30	6.70
H	0.114	0.122	2.90	3.10
I	0.130	0.146	3.30	3.70
J	0.264	0.287	6.70	7.30
K	0.024	0.033	0.60	0.85
L	0.091		2.30	
M	0.181		4.60	

SOT-223 (REV: R3)

PIN CONFIGURATION

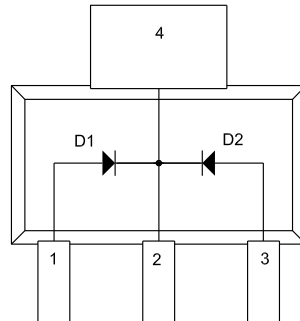

LEAD CODE:

- 1) Anode D1
 - 2) Cathode D1, D2
 - 3) Anode D2
 - 4) Cathode D1, D2
- Pin 2 and Pin 4 are common.

MARKING:

FULL PART NUMBER

R0 (22-November 2010)




You are logged in as :: Anonymous Registered user login

0 Items, (0 Pieces)

[Return to Home Page](#)

CZSH10-40C
SMD Schottky Rectifier Dual: Common Cathode

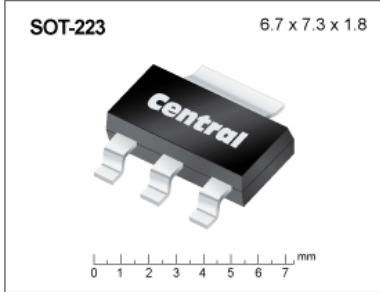

Documentation Links:

- [Part Datasheet](#)
- [Case & Material Composition Datasheet](#)

Part Availability:

Central Semiconductor Part # :	Packaging Base:	Availability :	Part Marking:
CZSH10-40C BK	Box@350	Please Call	
CZSH10-40C TR	Reel@1,000	In Stock	CZSH10-40C

Additional Documentation Links:

- [Analytical Test Report:Sn plating](#)
- [Analytical Test Report:Au bond wire](#)
- [Analytical Test Report:Encapsulation LMC400SRM](#)
- [Analytical Test Report:Leadframe PMC90 AG](#)
- [Analytical Test Report:Au Bond Wire](#)
- [Analytical Test Report:Cu Alloy Lead Frame-Alloy A194](#)
- [Analytical Test Report:Sn Plating SNTITE-24](#)
- [Analytical Test Report:Halogen-Free EMC for SOT-223](#)

Request sample of this item:

 (qty)

Requested Plating

- Any
 PbFree PbSn

In order to better serve you, we have created a new web based request system. Click [here](#) to access our new inquiry page. Login to the website is required. First time users please use the quick and easy one time website registration.

For further assistance using the new web based request system, click [here](#).

[Return to Home Page](#) ::

