

F emale Header 1.27mm



RoHS






Female Header 1.27mm 1 Row H=4.6mm Straight Type

Specifications

Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material






Insulator:Polyester,UL 94V-0
 ©Standard:Nylon 6T
 Terminal:Copper Alloy
 Plating:Gold Plated

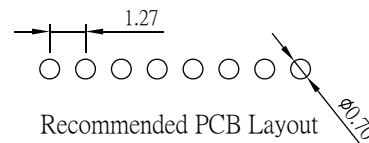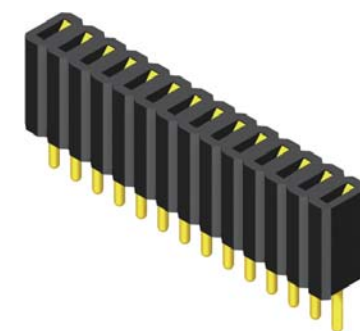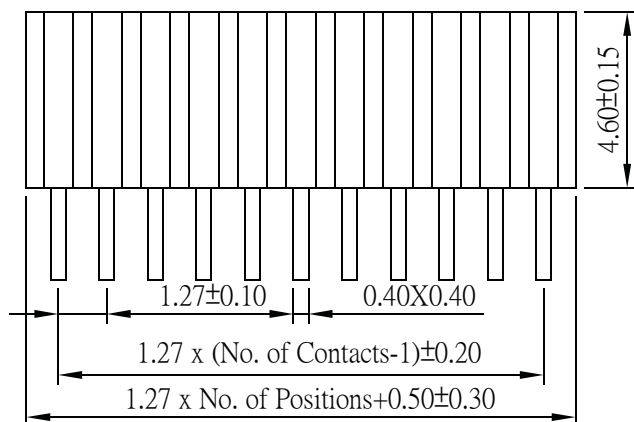

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Part No.:PS4S46-1XX-U


Female Header 1.27x2.54mm 2 Row H=4.6mm Straight Type

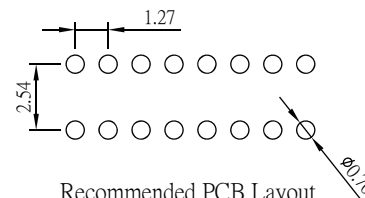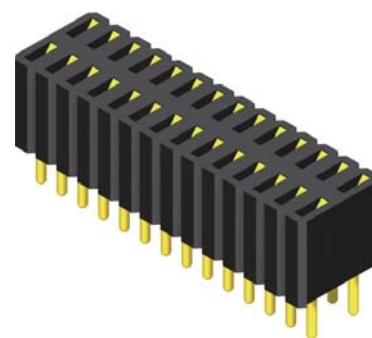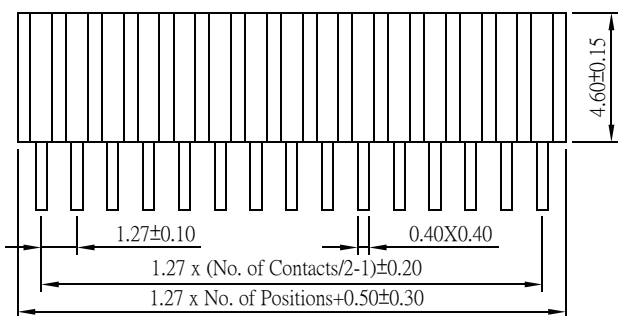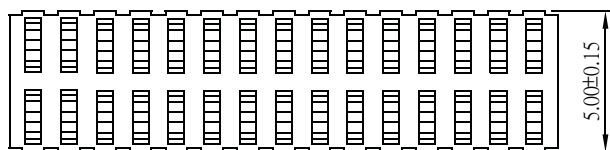

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Part No.:PS4S46-2XX-U

ORDER INFORMATION

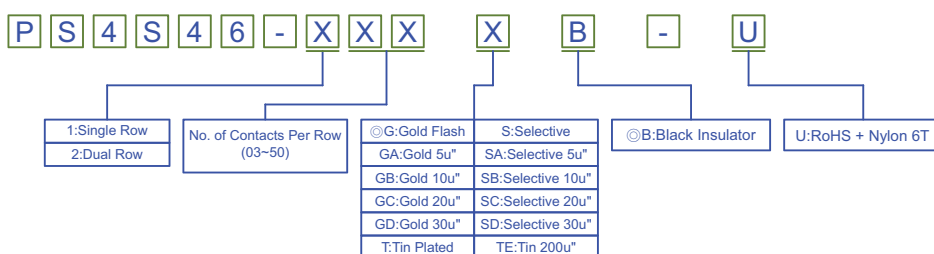

©: Standard Recommended