

300mA Low Dropout Linear Regulator

■ FEATURES

- Low Dropout Voltage of 180mV at 100mA Output Current (3.0V Output Version).
- Guaranteed 300mA Output Current.
- Internal 1.3Ω P-MOSFET Draws no Base Current.
- Low Ground Current at 55µA.
- 2% Accuracy Output Voltage of 1.8V/ 2.0V/ 2.5V/ 2.7V/ 3.0V.
- Input Voltage Range up to 12V.
- Needs only 1µF for Stability.
- Current and Thermal Limiting.

■ DESCRIPTION


The AIC1739 is a 3-pin low dropout linear regulator. The superior characteristics of the AIC1739 include zero base current loss, very low dropout voltage, and 2% accuracy output voltage. Typical ground current remains approximately 55µA, from no load to maximum loading conditions. Dropout voltage is exceptionally low. Output current limiting and thermal limiting are built in to provide maximal protection to the AIC1739 against fault conditions.

■ APPLICATIONS

- Voltage Regulator for CD-ROM Drivers.
- Voltage Regulator for LAN Cards.
- Voltage Regulator for Microprocessor.
- Wireless Communication Systems.
- Battery Powered Systems.

The AIC1739 comes in the popular 3-pin SOT-89 and TO-92 packages.

■ TYPICAL APPLICATION CIRCUIT

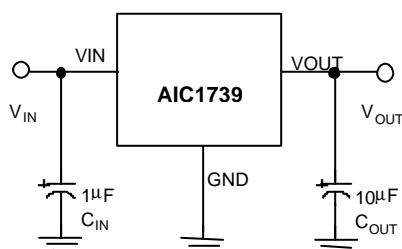

Low Dropout Linear Regulator

■ ORDERING INFORMATION

AIC1739-XXCXXX


PACKING TYPE
TR: TAPE & REEL
BG: BAG

PACKAGING TYPE
X: SOT89
ZT: TO92
ZL: TO92

OUTPUT VOLTAGE
18: 1.8V
20: 2.0V
25: 2.5V
27: 2.7V
30: 3.0V

Example: AIC1739-18CXTR

→ 1.8V Version, in SOT-89 Package
& Tape & Reel Packing Type

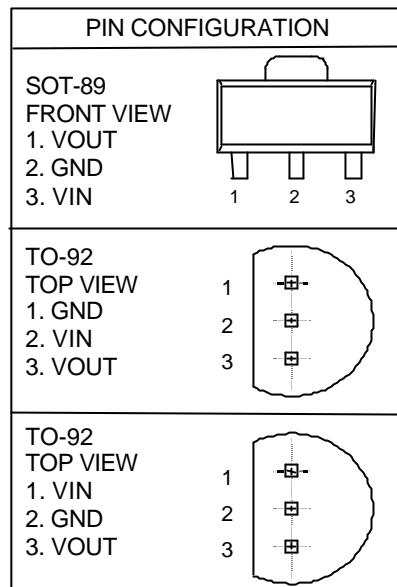

■ ABSOLUTE MAXIMUM RATINGS

Input Supply Voltage	-0.3~12V
Operating Junction Temperature Range	-40°C~ 85°C
Storage Temperature Range	-65°C~150°C
Power Dissipation	0.5W
SOT-89 Package	0.5W
TO-92 Package	0.5W

■ TEST CIRCUIT

Refer to the TYPICAL APPLICATION CIRCUIT

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, C_{IN}=1mF, C_{OUT}=10mF, unless otherwise specified.)

PARAMETER	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	No Load AIC1739-30 V _{IN} =4.0~12V AIC1739-27 V _{IN} =4.0~12V AIC1739-25 V _{IN} =4.0~12V AIC1739-20 V _{IN} =4.0~12V AIC1739-18 V _{IN} =4.0~12V	2.940	3.000	3.060	V
		2.646	2.700	2.754	
		2.450	2.500	2.550	
		1.960	2.000	2.040	
		1.764	1.800	1.836	
Output Voltage Temperature Coefficient	(Note 1)		50	150	PPM/°C

■ ELECTRICAL CHARACTERISTICS (Continued)

PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Line Regulation	$I_L=1\text{mA}$	$V_{IN}=4.0\text{~}12\text{V}$		3	10	mV
Load Regulation (Note 2)		$V_{IN}=5\text{V}$, $I_L=0.1\text{~}300\text{mA}$		7	25	mV
Current Limit (Note 3)		$V_{IN}=5\text{V}$, $V_{OUT}=0\text{V}$	320	440		mA
Dropout Voltage (Note 4)	AIC1739s AIC1739-30 AIC1739-27 AIC1739-25 AIC1739-20 AIC1739-18	$I_L=0.1\text{mA}$ $I_L=300\text{mA}$ $I_L=300\text{mA}$ $I_L=300\text{mA}$ $I_L=300\text{mA}$ $I_L=300\text{mA}$		0.2 540 570 610 820 920	10 640 670 710 970 1070	mV
Ground Current	$I_o=0.1\text{mA}\sim I_{MAX}$	$V_{IN}=4\text{~}12\text{V}$		55	80	μA



Note 1: Guaranteed by design.

Note 2: Regulation is measured at constant junction temperature, using pulse testing with a low ON time.



Note 3: Current limit is measured by pulsing a short time.

Note 4: Dropout voltage is defined as the input to output differential at which the output voltage drops 100mV below the value measured with a 1V differential.


■ TYPICAL PERFORMANCE CHARACTERISTICS

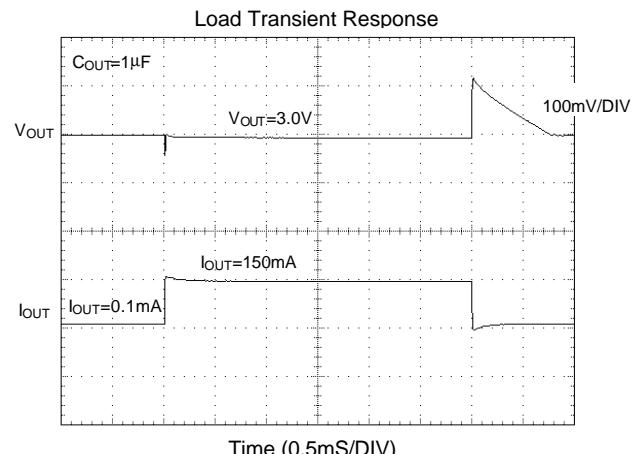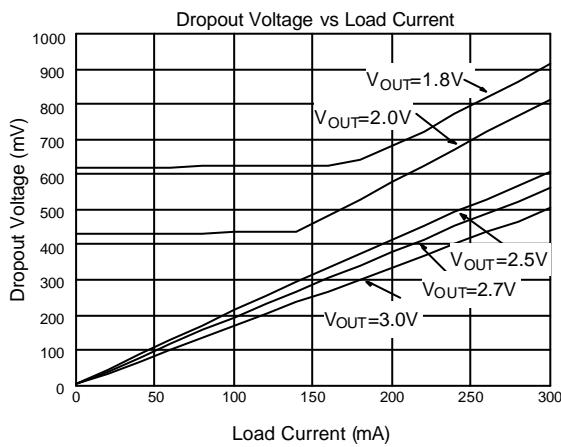

■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

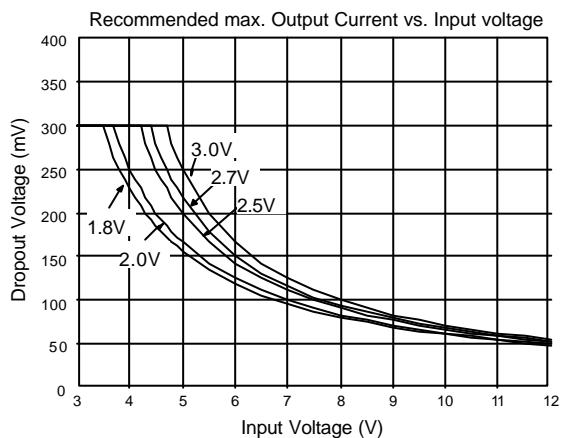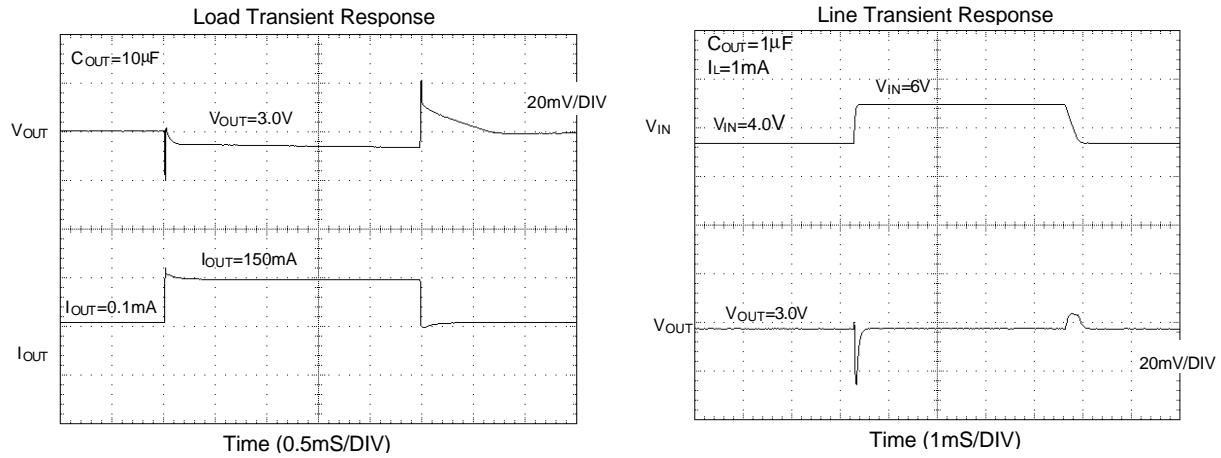

■ BLOCK DIAGRAM

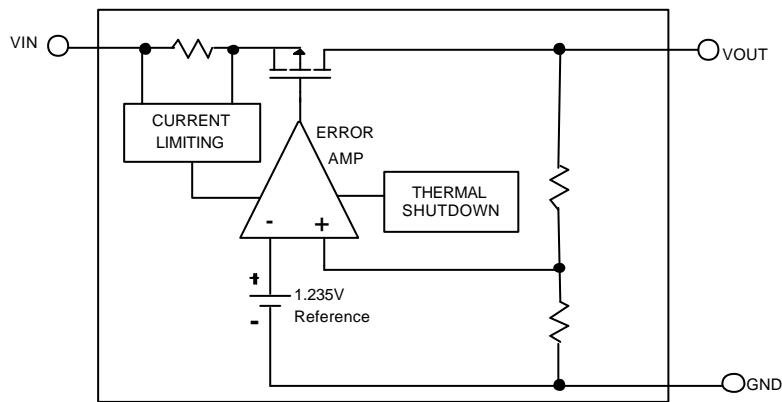

■ PIN DESCRIPTION

- VOUT PIN - Output pin.
 GND PIN - Power GND.
 VIN PIN - Power Supply Input.

■ APPLICATION INFORMATIONS


A $1\mu\text{F}$ (or greater) capacitor is required between the AIC1739 output and ground for stability. Without this capacitor the part will oscillate. Even though most types of capacitor may work, the equivalent series resistance (ESR) should be held to 5Ω or less if Aluminum electrolytic type is used. Many Aluminum electrolytics have electrolytes that freeze at about -30°C , so solid tantalums are recommended for operation below -25°C . The

value of this capacitor may be increased without limit.

A $0.1\mu\text{F}$ capacitor (or greater) should be placed from the AIC1739 input to ground if the lead inductance between the input and power source exceeds 500nH (approximately 10 inches of trace).

■ PHYSICAL DIMENSIONS

● SOT-89 (unit: mm)

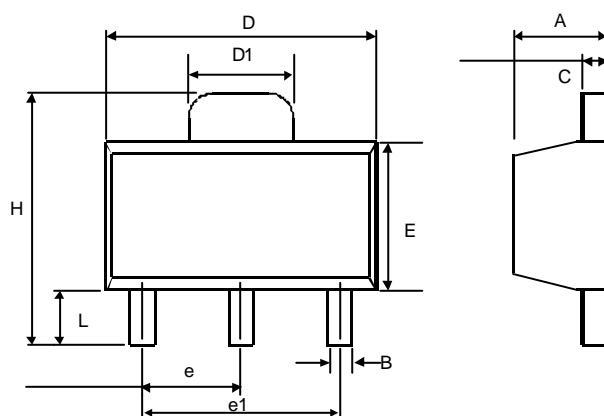


SYMBOL	MIN	MAX
A	1.40	1.60
B	0.36	0.48
C	0.35	0.44
D	4.40	4.60
D1	1.62	1.83
E	2.29	2.60
e	1.50 (TYP.)	
e1	3.00 (TYP.)	
H	3.94	4.25
L	0.89	1.20

SOT-89 MARKING

Part No.	Marking
AIC1739-18	AY18
AIC1739-20	AY20
AIC1739-25	AY25
AIC1739-27	AY27
AIC1739-30	AY30

● TO-92 (unit: mm)

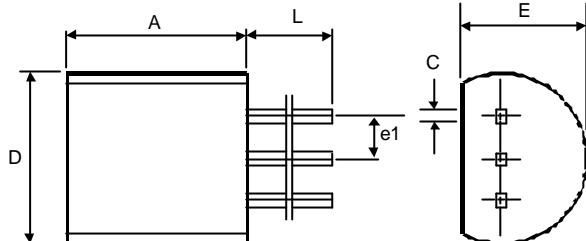

SYMBOL	MIN	MAX
A	4.32	5.33
C	0.38 (TYP.)	
D	4.40	5.20
E	3.17	4.20
e1	1.27 (TYP.)	
L	12.7	-