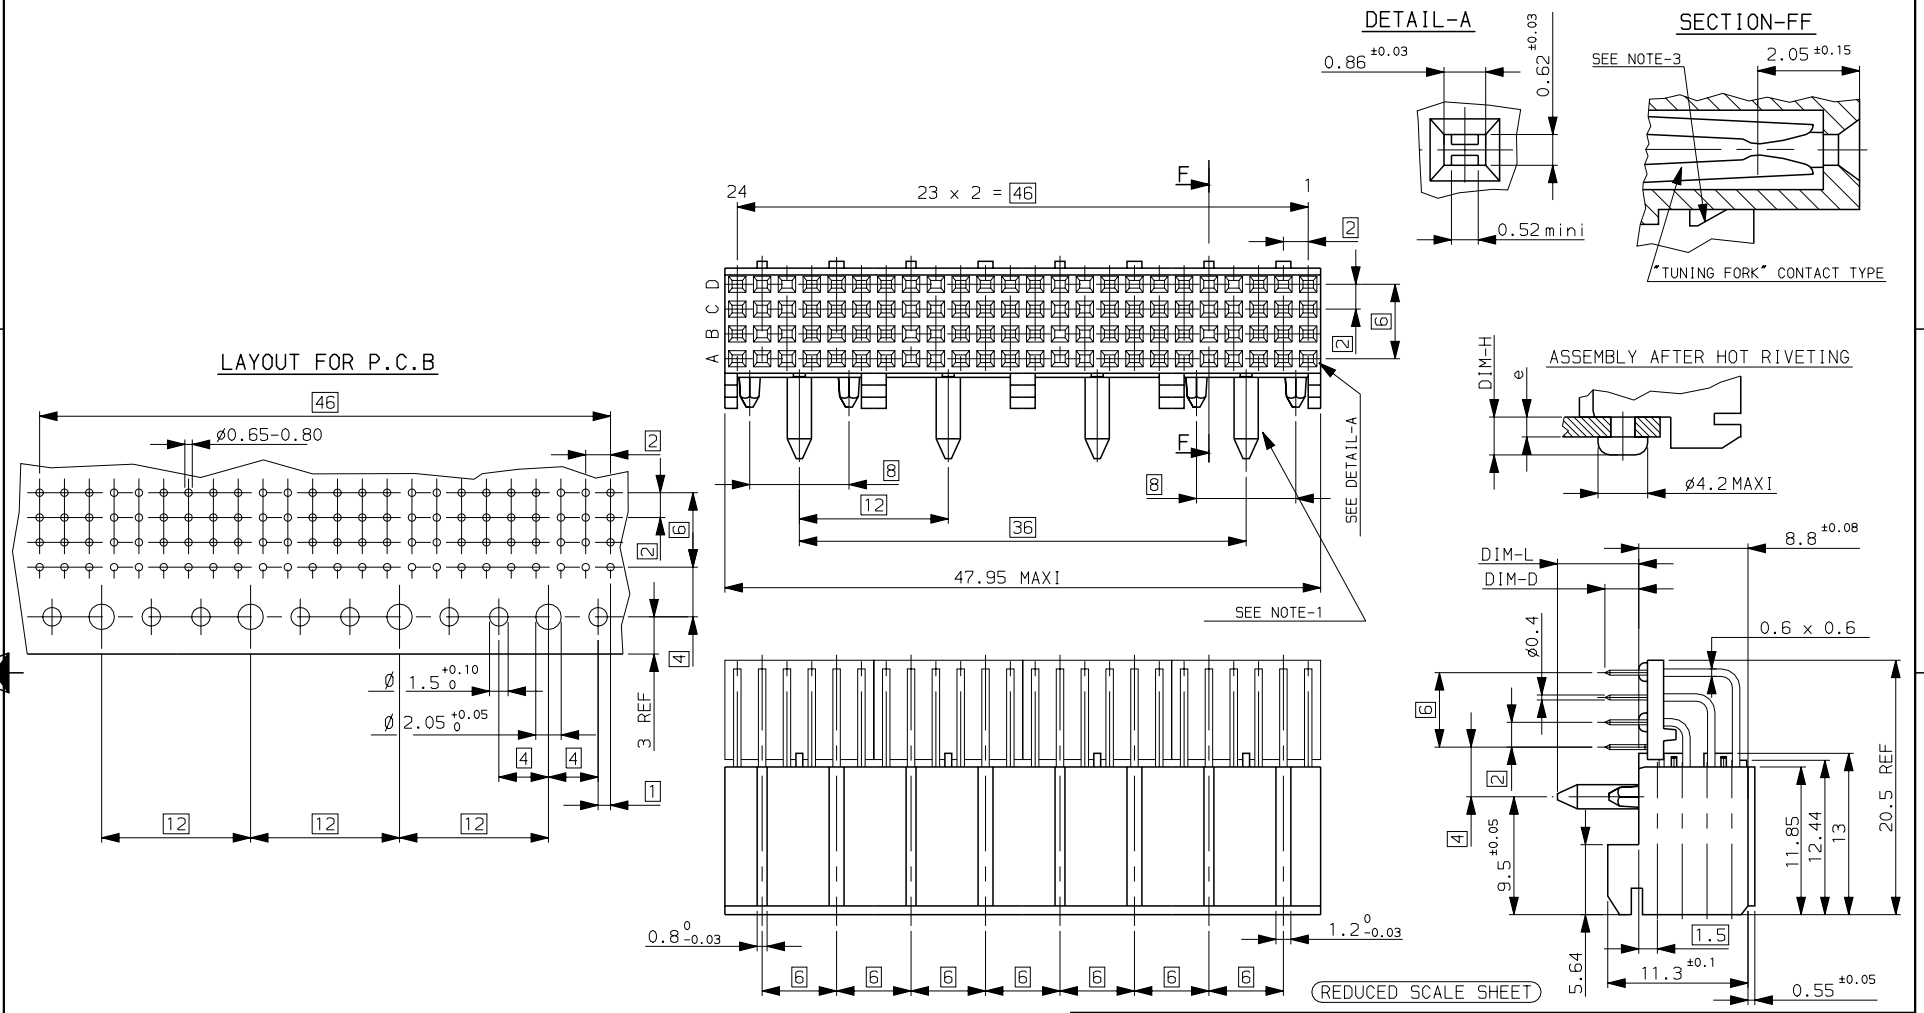

GENERAL CHARACTERISTICS: SEE DRW C-8626-0000

NOTE-1: PLUG FOR HOT RIVETING ASSEMBLY

NOTE-2: MATING CONNECTORS WITH PCB 2.4 mm IN MALE CONNECTORS WIDE BODY ONLY

NOTE-3: PLUG FOR CODING KEY FIXING

Part Number: HM1F43FxR000Hz		
PCB THICKNESS e = 1.6 mm	D = 2.90 ±0.3	H = 3.08 MAXI
	- REPLACE x BY A	L = 5.25
PCB THICKNESS e = 2.4 mm	D = 3.60 ±0.3	H = 3.78 MAXI
	- REPLACE x BY B (SEE NOTE-2)	L = 6.05
PERFORMANCE LEVEL ("BP" TESTS OF IEC)	PL1 - REPLACE z BY 6	PL3 - REPLACE z BY 4
	PL2 - REPLACE z BY 5	

ISS	DATE		MOD N°
e	19/03/98	ADD TAILS KEEPERS --	--
		Latest modification by : CHAMPION	

Designed by: CHAMPION date:30/07/91 | Type of drawing: CUSTOMER

TITLE : MILLIPACS-1 FEMALE 4 ROWS 96 CTS RIGHT ANGLE-STB-HOT RIVETING PLUG

SHEET 1/1

SCALE: 2.5

FRAMATOME CONNECTORS FRANCE
Rue Louis Breguet - BP 05
72024 LE MANS Cedex
Tel. 33 (16) 43.84.08.43

This document is the property of FRAMATOME CONNECTORS FRANCE
It must not be reproduced or communicated without permission in writing from the owners

FORMAT A3

SOURIAU DRG N° C-8626-0019

PROJECT D92D035

PDM: Rev:E STATUS:Released Printed: Jan 12, 2004