



## Trench Schottky Rectifier

### FEATURES

- Patented Trench Schottky technology
- Excellent high temperature stability
- Low forward voltage
- Lower power loss/ High efficiency
- High forward surge capability
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



**ITO-220AB**

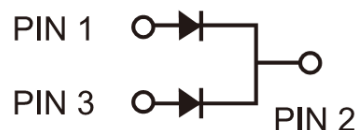

### TYPICAL APPLICATIONS

Trench Schottky barrier rectifier are designed for high frequency miniature switched mode power supplies such as adapters, lighting and on-board DC/DC converters.

### MECHANICAL DATA

**Case:** ITO-220AB

Molding compound, UL flammability classification rating 94V-0

Base P/N with suffix "M" on P/N - commercial grade

Base P/N with suffix "G" on packing code - green compound (halogen-free)

**Terminal:** Matte tin plated leads, solderable per JESD22-B102

Meet JESD 201 class 1A whisker test

**Polarity:** As marked

**Mounting torque:** 0.56 Nm Max.

**Weight:** 1.7 g (approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)							
PARAMETER		SYMBOL	TSF10M45C			UNIT	
Maximum repetitive peak reverse voltage		V <sub>RRM</sub>	45			V	
Maximum average forward rectified current	per device	I <sub>F(AV)</sub>	10			A	
	per diode		5				
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load per diode		I <sub>FSM</sub>	100			A	
Voltage rate of change (Rated V <sub>R</sub> )		dV/dt	10000			V/μs	
Isolation voltage from terminal to heatsink t = 1 min		V <sub>AC</sub>	1500			V	
			MIN	TYP	MAX		
Instantaneous forward voltage per diode ( Note1 )	I <sub>F</sub> = 2.5A	T <sub>J</sub> = 25°C	V <sub>F</sub>	-	0.42	-	V
	I <sub>F</sub> = 5A			-	0.47	0.58	
	I <sub>F</sub> = 2.5A	T <sub>J</sub> = 125°C		-	0.33	-	
	I <sub>F</sub> = 5A			-	0.40	0.50	
Instantaneous reverse current per diode at rated reverse voltage	T <sub>J</sub> = 25°C		I <sub>R</sub>	-	-	500	μA
	T <sub>J</sub> = 125°C			-	5	30	mA
Typical thermal resistance per diode		R <sub>θJC</sub>	3			°C/W	
Operating junction temperature range		T <sub>J</sub>	- 55 to +150			°C	
Storage temperature range		T <sub>STG</sub>	- 55 to +150			°C	

Note 1: Pulse Test with Pulse Width=300μs, 1% Duty Cycle

**ORDERING INFORMATION**

PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
TSF10M45C	M	C0	G	ITO-220AB	50 / Tube


**EXAMPLE**

PREFERRED P/N	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
TSF10M45CMC0	TSF10M45C	M	C0		Commercial grade
TSF10M45CMC0G	TSF10M45C	M	C0	G	Commercial grade Green compound


**RATINGS AND CHARACTERISTICS CURVES**

(TA=25°C unless otherwise noted)


**FIG.1 FORWARD CURRENT DERATING CURVE**

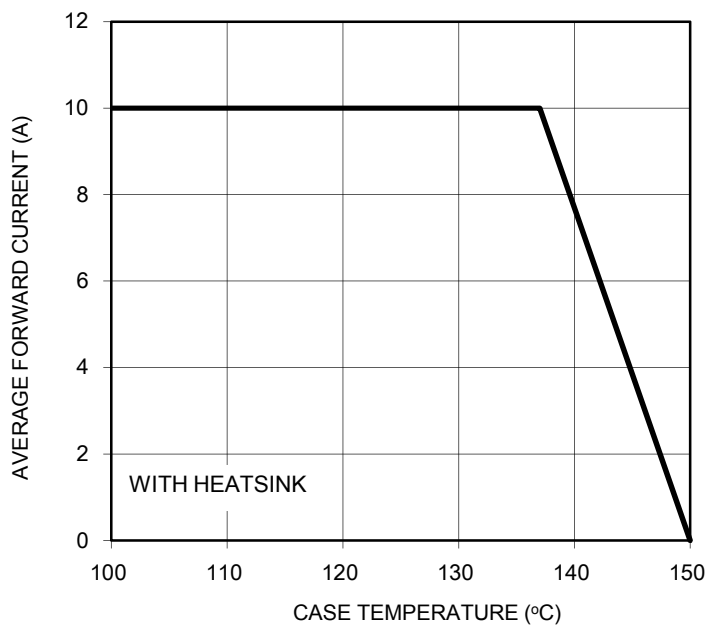


**FIG. 2 TYPICAL FORWARD CHARACTERISTICS**

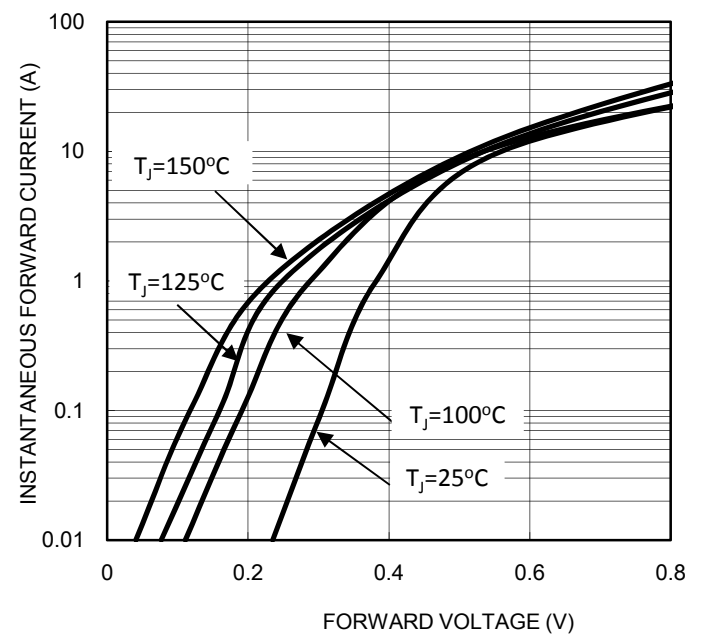


**FIG. 3 TYPICAL REVERSE CHARACTERISTICS**

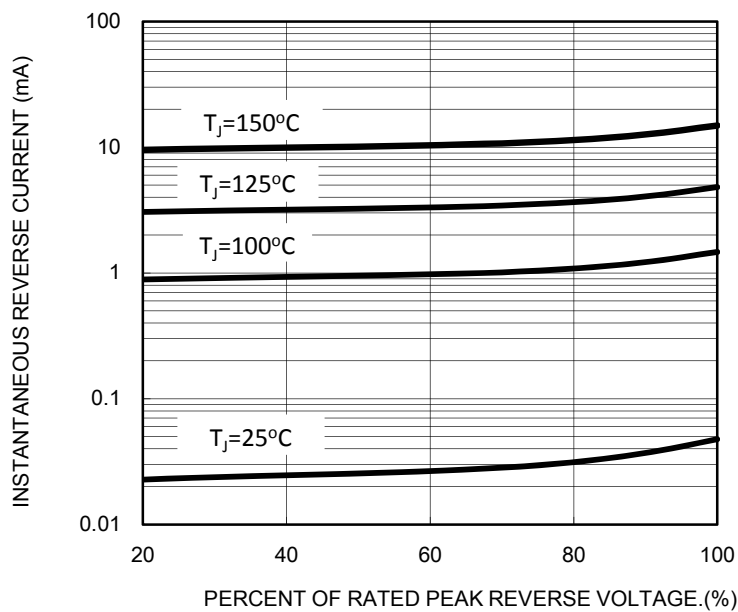

**FIG. 4 TYPICAL JUNCTION CAPACITANCE**

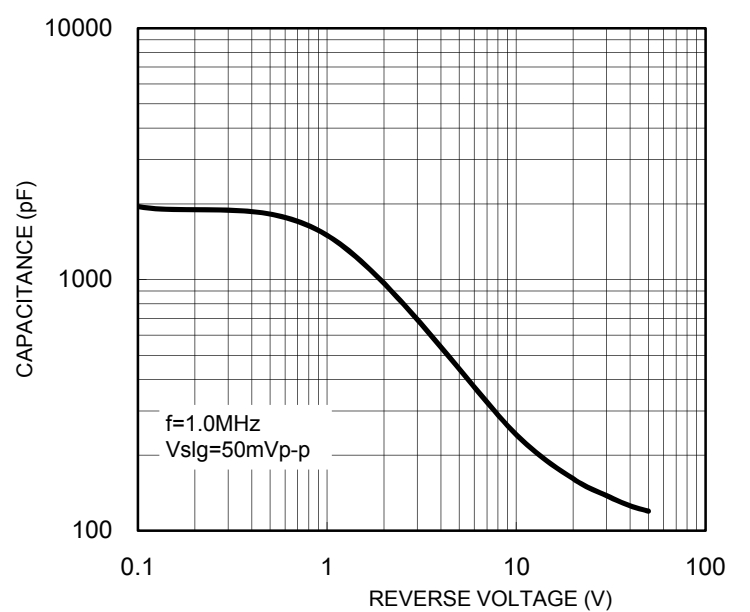


PACKAGE OUTLINE DIMENSIONS  
ITO-220AB

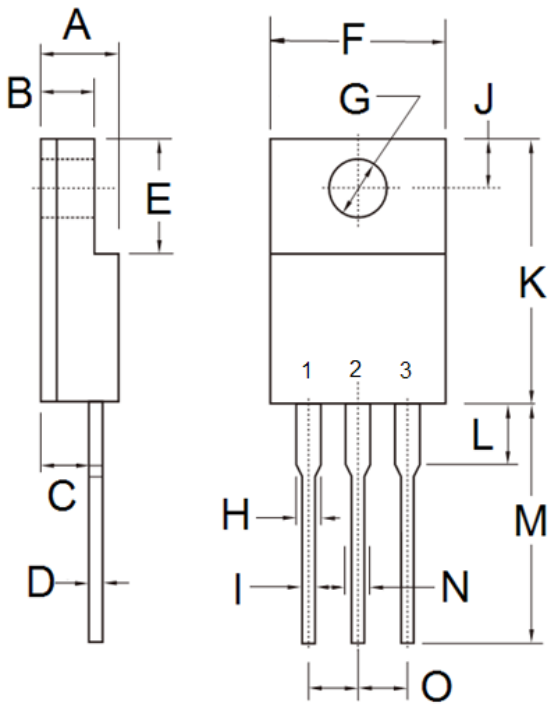

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	4.30	4.70	0.17	0.19
B	2.50	3.16	0.10	0.12
C	2.30	2.96	0.09	0.12
D	0.46	0.76	0.02	0.03
E	6.30	6.90	0.25	0.27
F	9.60	10.30	0.38	0.41
G	3.00	3.40	0.12	0.13
H	0.95	1.45	0.04	0.06
I	0.50	0.90	0.02	0.04
J	2.40	3.20	0.09	0.13
K	14.80	15.50	0.58	0.61
L	-	4.10	-	0.16
M	12.60	13.80	0.50	0.54
N	-	1.80	-	0.07
O	2.41	2.67	0.09	0.11

MARKING DIAGRAM



- P/N = Specific Device Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.