

BCD-TO-SEVEN SEGMENT LATCH/DECODER/DRIVER

FEATURES

- ◆ Phase Input Signal Reproduced on Outputs for Liquid Crystal Display
- ◆ Latched Storage of Input Code
- ◆ Blanking Input for Display Intensity Modulation
- ◆ Readout Blanking for Illegal Input Combinations
- ◆ Pin Compatible with CD4056A (with Pin 7 Tied to VSS)

DESCRIPTION

The 4543B BCD-to-7 Segment Latch/Decoder/Driver is designed for use with liquid crystal readouts and is constructed with complementary MOS (CMOS) enhancement-mode devices. The circuit provides the functions of a 4-bit storage latch and a 8421 BCD-to-seven segment decoder and driver. The device has the capability to invert the logic levels of the output combinations. The Phase (Ph), Blanking (BI), and Latch Disable (LD) inputs are used to reverse the truth-table phase, blank the display, and store a BCD code, respectively. For liquid crystal readouts, a square wave is applied to the Ph input of the circuit and the electrically common backplane of the display. The outputs of the circuit are connected directly to the segments of the readout. For other types of readouts, such as light-emitting diode (LED), incandescent, gas discharge, and fluorescent readouts, connection diagrams are given on this data sheet.


Applications include instrument (e.g., counter,

TRUTH TABLE

| INPUTS | | | | | | OUTPUTS | | | | | | | | |
|--------|----|-----|---|---|---|---------|--------------------------------------|----|----|----|----|----|----|------------------|
| LD | BI | Ph* | D | C | B | A | a | b | c | d | e | f | g | Display |
| X | 1 | 0 | X | X | X | X | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank |
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 |
| 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 |
| 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 2 |
| 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | 3 |
| 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 4 |
| 1 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | 5 |
| 1 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 6 |
| 1 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 7 |
| 1 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 8 |
| 1 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 9 |
| 1 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank |
| 1 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank |
| 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank |
| 1 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank |
| 0 | 0 | 0 | X | X | X | X | ** | ** | ** | ** | ** | ** | ** | ** |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | Inverse of Output Combinations Above | | | | | | | Display as above |

X = Don't care
 * = Above Combinations
 * = For liquid crystal readouts, apply a square wave to Ph
 For common cathode LED readouts, select Ph = 0
 For common anode LED readouts, select Ph = 1
 ** = Depends upon the BCD code previously applied when LD = 1

CONNECTION DIAGRAM (all packages)

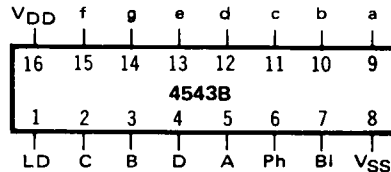

Add suffix for package:

- C 16-pin Cerdip
- D 16-pin Ceramic
- E 16-pin Epoxy
- F 16-pin Flat
- H Chip


RECOMMENDED OPERATING CONDITIONS

For maximum reliability:


| | | | |
|-----------------------|-----------|-------------|-----|
| DC Supply Voltage | VDD - VSS | 3 to 15 | Vdc |
| Operating Temperature | TA | -55 to +125 | °C |
| C, D, F, H Device | | -40 to +85 | °C |
| E Device | | | |

DVM, etc.) display driver, computer/calculator display driver, cockpit display driver, and various clock, watch, and timer uses.

BLOCK DIAGRAM



DISPLAY



ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS¹

| PARAMETER | V _{DD} (Vdc) | CONDITIONS | T _{LOW} ² | | +25°C | | | T _{HIGH} ² | | Units |
|--------------------------|--------------------------|---|-------------------------------|------|-------|------|------|--------------------------------|------|------------------|
| | | | Min. | Max. | Min. | Typ. | Max. | Min. | Max. | |
| QUIESCENT DEVICE CURRENT | I _{DD} | V _{IN} =V _{SS} or V _{DD} All valid input combinations | — | 5 | — | 0.05 | 5 | — | 150 | μA _{dc} |
| | | | — | 10 | — | 0.1 | 10 | — | 300 | |
| | | | — | 20 | — | 0.2 | 20 | — | 600 | |

NOTES: ¹ Remaining Static Electrical Characteristics are listed under "4000B Series Family Specifications".

² T_{LOW} = -55°C for C, D, F, H device.


= -40°C for E device.

T_{HIGH} = +125°C for C, D, F, H device.


= + 85°C for E device.

DYNAMIC CHARACTERISTICS (C_L = 50pF, T_A = 25°C)

| PARAMETER | V _{DD} (Vdc) | Min. | Typ. | Max. | Units |
|-------------------------------|-------------------------------------|------|------|------|-------|
| PROPAGATION DELAY TIME | t _{PLH} , t _{PHL} | 5 | — | 550 | ns |
| | | 10 | — | 210 | |
| | | 15 | — | 160 | |
| OUTPUT TRANSITION TIME | t _{TLH} , t _{THL} | 5 | — | 100 | ns |
| | | 10 | — | 50 | |
| | | 15 | — | 40 | |
| MINIMUM DATA INPUT SETUP TIME | t _{setup} | 5 | — | -40 | ns |
| | | 10 | — | -15 | |
| | | 15 | — | -10 | |
| MINIMUM DATA INPUT HOLD TIME | t _{hold} | 5 | — | 40 | ns |
| | | 10 | — | 15 | |
| | | 15 | — | 10 | |
| MINIMUM LD PULSE WIDTH | PW _{LD} | 5 | — | 125 | ns |
| | | 10 | — | 50 | |
| | | 15 | — | 40 | |

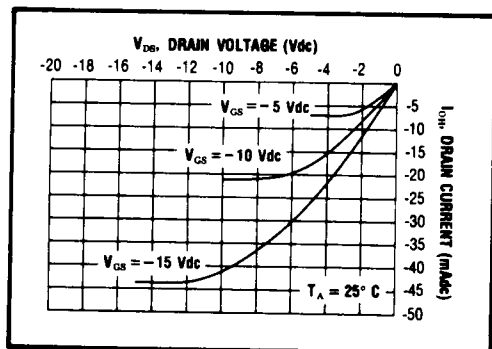


Typical P-Channel
Source Current Characteristics

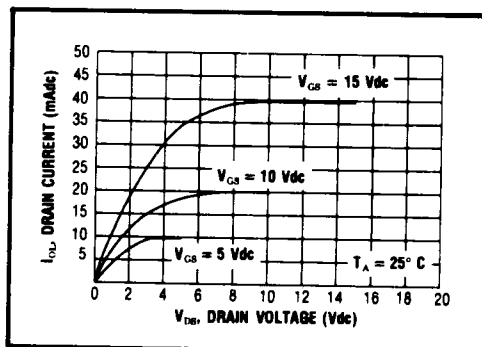

Typical N-Channel
Sink Current Characteristics

LOGIC DIAGRAM

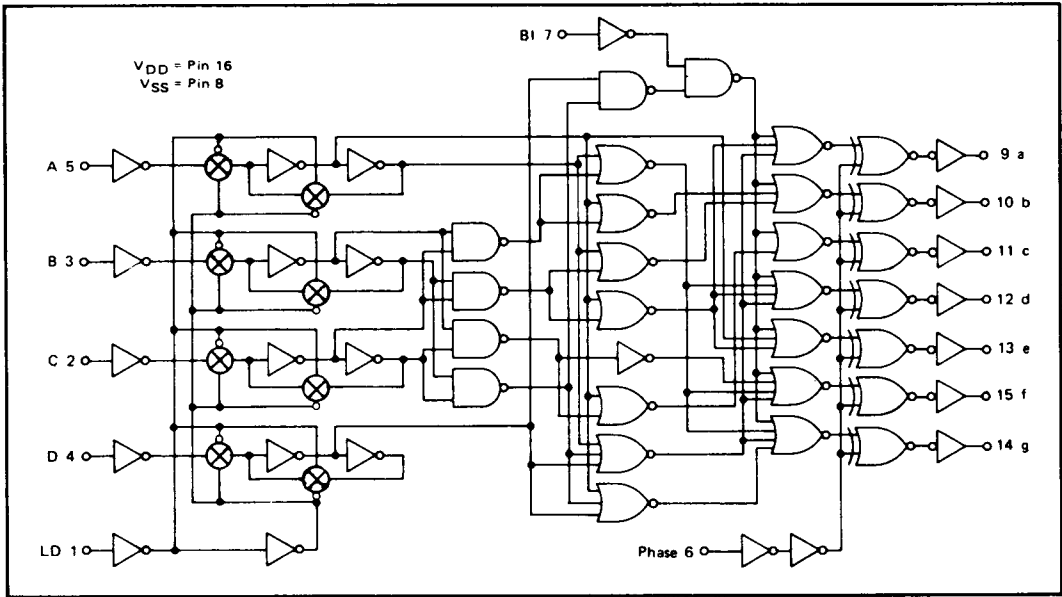

APPLICATIONS INFORMATION

CONNECTIONS TO VARIOUS DISPLAY READOUTS

