

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	5/27/11	

APPROVED: _____

DATE: _____ TITLE: _____

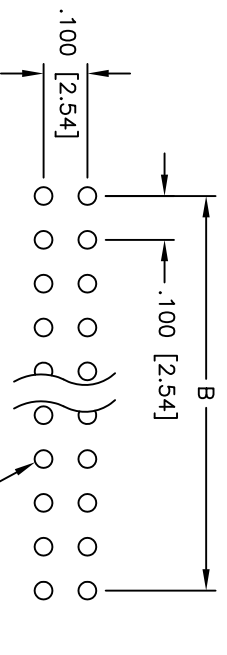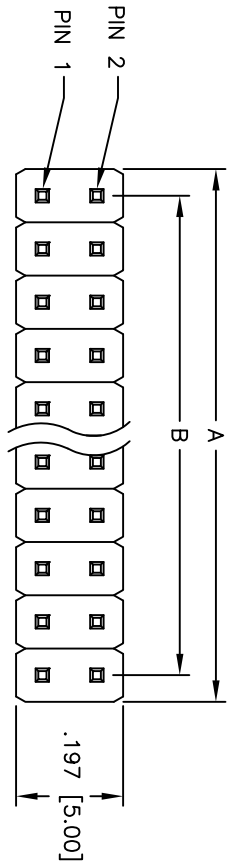

RECOMMENDED PCB LAYOUT

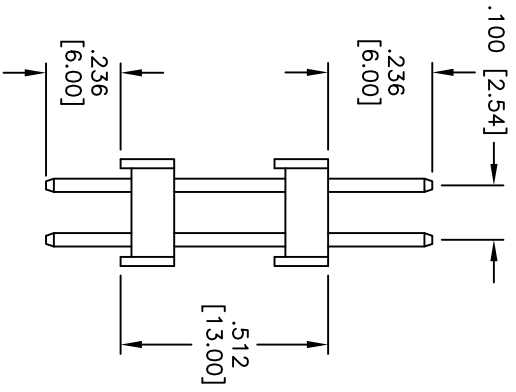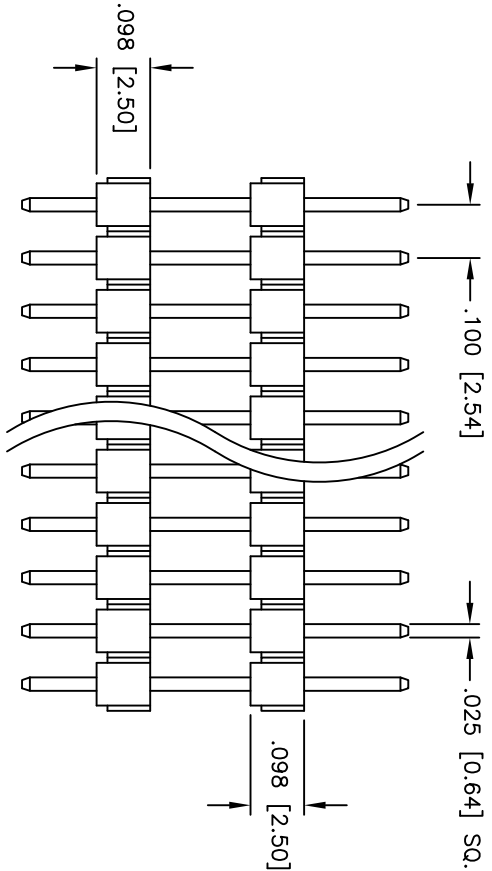

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black
Contacts: Brass

Plating: Gold flash over Nickel underplate overall

Electrical: Operating voltage: 250 VAC max
Current rating: 3 Amps max

Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating: Operating temperature: -55°C to +105°C

Environmental: Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds



Positions: 4 thru 100
A = .100 [2.54] x No. of Positions per Row
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE		
DRAWN	DY	5/27/11	
CHECKED			
APPROVED			

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] DUAL ROW PIN HEADER
DUAL INSULATOR, GOLD PLATED

SIZE	PART NO.	REV.
X	DPH-2-XX-U-.236/.236/.512	-
REF:	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1