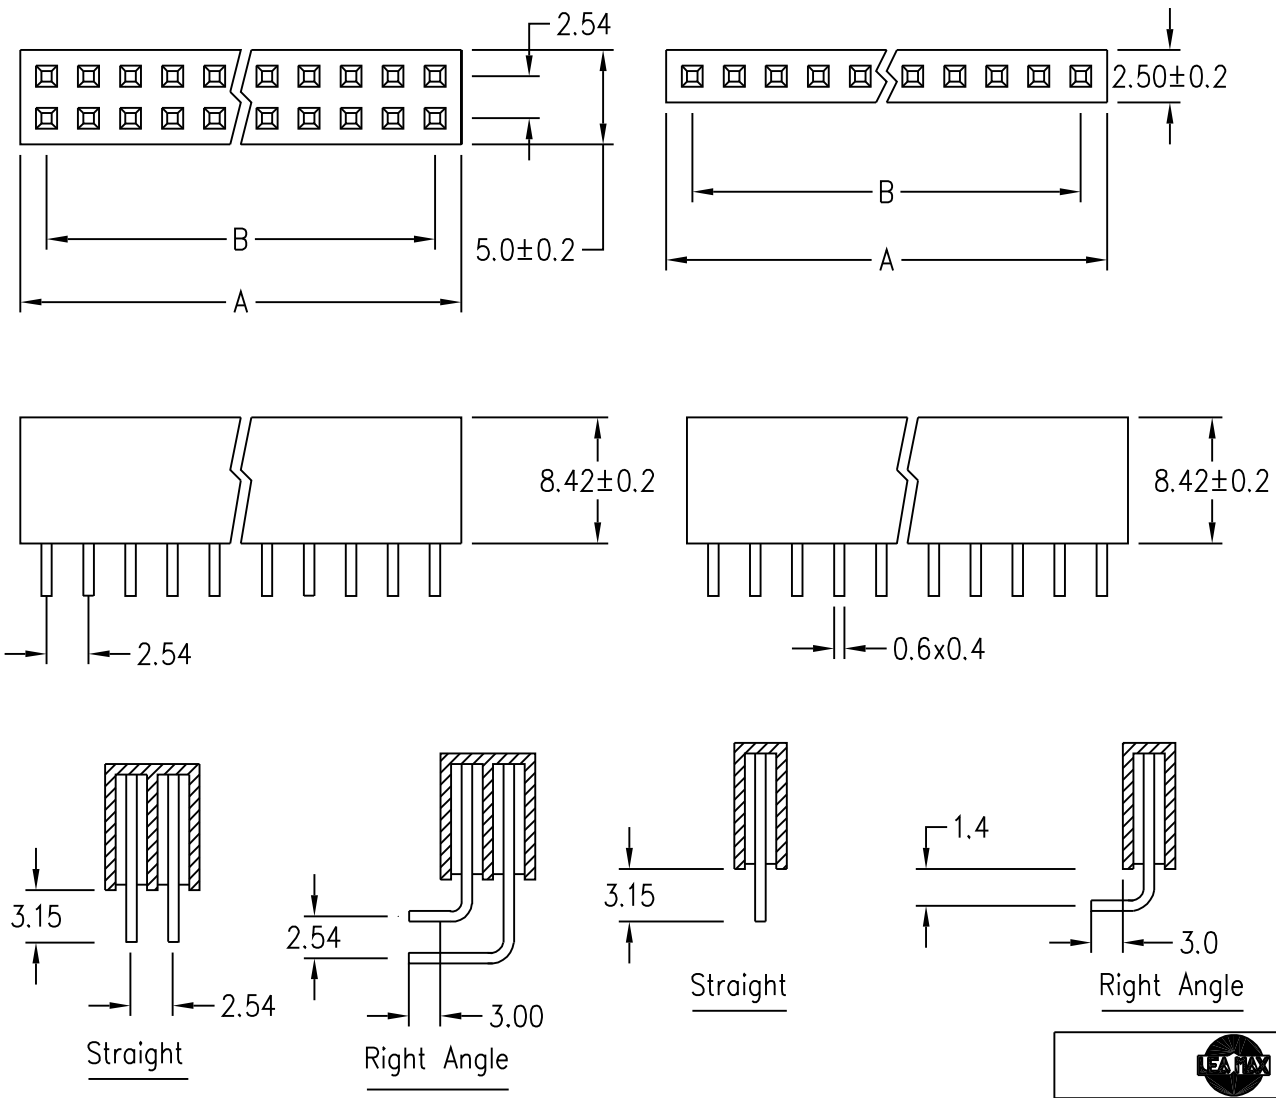

Insulator Material:

PBT & 30% Glass Fiber(UL 94V-0)

Contact Resistance:

30MΩ Max at DC 100MA

Insulator Resistance:

1000 MΩ Min at Dc 500V

Current Rating:

1 AMP

Dielectric Withstanding Voltage:

AC 500V For 1minute

Temperature Rating:

-55°C ~ +105° C

Contact Material:

Phosphor Bronze

易昕企業有限公司
LEAMAX ENTERPRISE CO., LED.

PROJ	SCALE : F DO NOT SCALE DWG		MOLD NO 2160		
APP			MODEL	FILE NO	REV. X1
CHK	CCJ	89.12.21			
DGN	WU	89.12.21	UNIT MM	SHT 1 OF 1	SIZE A4
DRW	SHIEH	89.12.21			