

NEC

SURFACE MOUNT NPN SILICON HIGH FREQUENCY TRANSISTOR

NE685 SERIES


FEATURES

- LOW COST
- SMALL AND ULTRA SMALL SIZE PACKAGES
- LOW VOLTAGE/LOW CURRENT OPERATION
- HIGH GAIN BANDWIDTH PRODUCT: f_T of 12 GHz
- NOISE FIGURES OF 1.5 dB AT 2.0 GHz

DESCRIPTION

NEC's family of high frequency, low cost, surface mount devices are well suited for portable wireless communications and cellular radio applications.

The NE685 series of high f_T (12 GHz) devices is suitable for very low voltage/low current, low noise applications. These products are ideal for applications up to 2.4 GHz where low cost, high gain, low voltage, and low current are prime concerns.

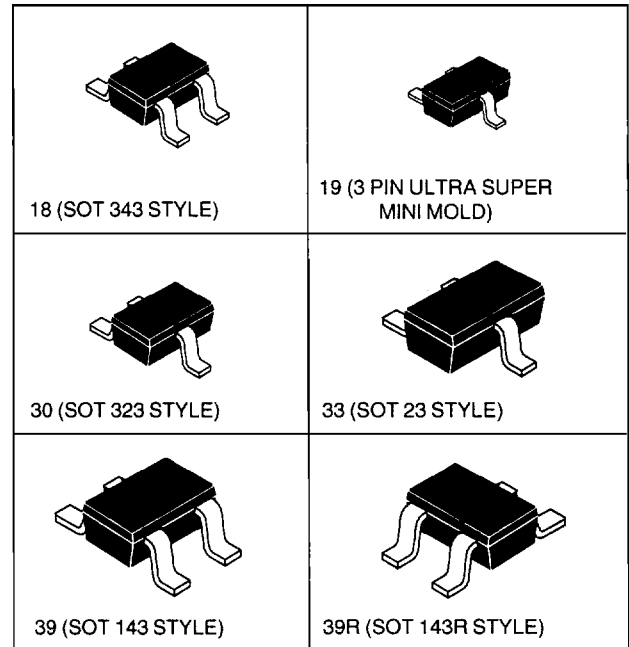

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

| PART NUMBER ¹ EIAJ ² REGISTERED NUMBER PACKAGE OUTLINE | | | NE68518 2SC5015 18 | | | NE68519 2SC5010 19 | | | NE68530 2SC4959 30 | | | NE68533 2SC4955 33 | | | NE68539/39R 2SC4957 39 | | |
|--|---|--------------------|--------------------------|-----|-----|--------------------------|-----|------|--------------------------|-----|-----|--------------------------|------|-----|------------------------------|-----|-----|
| SYMBOLS | PARAMETERS AND CONDITIONS | UNITS | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX |
| f_T | Gain Bandwidth Product at $V_{CE} = 3\text{V}$, $I_C = 10\text{mA}$, $f = 2.0\text{GHz}$ | GHz | | 12 | | | 12 | | | 12 | | | 12 | | | 12 | |
| NF _{MIN} | Minimum Noise Figure at $V_{CE} = 3\text{V}$, $I_C = 3\text{mA}$, $f = 2.0\text{GHz}$ | dB | | 1.5 | 2.5 | | 1.5 | 2.5 | | 1.5 | 2.5 | | 1.5 | 2.5 | | 1.5 | 2.5 |
| GNF | Associated Gain at $V_{CE} = 3\text{V}$, $I_C = 3\text{mA}$, $f = 2.0\text{GHz}$ | dB | | 8.5 | | | 7.5 | | | 7 | | | 7 | | | 7.5 | |
| MAG | Maximum Available Gain at $V_{CE} = 3\text{V}$, $I_C = 10\text{mA}$, $f = 2.0\text{GHz}$ | dB | | 12 | | | 11 | | | 10 | | | 10.5 | | | 11 | |
| $ S_{21E} ^2$ | Insertion Power Gain at $V_{CE} = 3\text{V}$, $I_C = 10\text{mA}$, $f = 2.0\text{GHz}$ | dB | 9 | 11 | | 7 | 9 | | 7 | 8.5 | | 7 | 8 | | 9 | 10 | |
| h_{FE} | Forward Current Gain ³ at $V_{CE} = 3\text{V}$, $I_C = 10\text{mA}$ | | 75 | 110 | 150 | 75 | 110 | 150 | 75 | 110 | 150 | 75 | 110 | 150 | 75 | 110 | 150 |
| I_{CBO} | Collector Cutoff Current at $V_{CB} = 5\text{V}$, $I_E = 0\text{mA}$ | μA | | | 0.1 | | | 0.1 | | | 0.1 | | | 0.1 | | | 0.1 |
| I_{EBO} | Emitter Cutoff Current at $V_{EB} = 1\text{V}$, $I_C = 0\text{mA}$ | μA | | | 0.1 | | | 0.1 | | | 0.1 | | | 0.1 | | | 0.1 |
| C_{RE}^4 | Feedback Capacitance at $V_{CB} = 3\text{V}$, $I_E = 0\text{mA}$, $f = 1\text{MHz}$ | pF | | 0.3 | 0.5 | | 0.4 | 0.7 | | 0.4 | 0.7 | | 0.4 | 0.7 | | 0.3 | 0.5 |
| P_T | Total Power Dissipation | mW | | | 150 | | | 125 | | | 150 | | | 180 | | | 180 |
| $R_{TH(J-A)}$ | Thermal Resistance (Junction to Ambient) | $^\circ\text{C/W}$ | | | 833 | | | 1000 | | | 833 | | | 620 | | | 620 |
| $R_{TH(J-C)}$ | Thermal Resistance(Junction to Case) | $^\circ\text{C/W}$ | | | 200 | | | 200 | | | 200 | | | 200 | | | 200 |

- Notes: 1. Precaution: Devices are ESD sensitive. Use proper handling procedures.
 2. Electronic Industrial Association of Japan.
 3. Pulsed measurement, $PW \leq 350\ \mu\text{s}$, duty cycle $\leq 2\%$.
 4. The emitter terminal should be connected to the ground terminal of the 3 terminal capacitance bridge.

ABSOLUTE MAXIMUM RATINGS¹ (TA = 25°C)

| SYMBOLS | PARAMETERS | UNITS | RATINGS |
|---------|------------------------------|-------|-------------|
| Vcbo | Collector to Base Voltage | V | 9 |
| Vceo | Collector to Emitter Voltage | V | 6 |
| Vebo | Emitter to Base Voltage | V | 2.0 |
| Ic | Collector Current | mA | 30 |
| TJ | Junction Temperature | °C | 150 |
| Tstg | Storage Temperature | °C | -65 to +150 |

Note: 1. Operation in excess of any one of these parameters may result in permanent damage.

NE68518

TYPICAL NOISE PARAMETERS (TA = 25°C)

| FREQ. (MHz) | NF _{OPT} (dB) | GA (dB) | Γ _{OPT} | | Rn/50 |
|-----------------------|---------------------------|------------|------------------|-----|-------|
| | | | MAG | ANG | |
| VCE = 3 V, Ic = 3 mA | | | | | |
| 500 | 1.00 | 21.32 | 0.63 | 26 | 0.56 |
| 800 | 1.15 | 16.29 | 0.59 | 31 | 0.44 |
| 1000 | 1.20 | 14.66 | 0.56 | 39 | 0.40 |
| 1500 | 1.35 | 11.02 | 0.52 | 48 | 0.37 |
| 2000 | 1.50 | 8.67 | 0.47 | 53 | 0.33 |
| 2500 | 1.65 | 7.24 | 0.40 | 65 | 0.23 |
| VCE = 3 V, Ic = 5 mA | | | | | |
| 500 | 1.20 | 21.15 | 0.55 | 19 | 0.47 |
| 800 | 1.25 | 17.29 | 0.51 | 31 | 0.42 |
| 1000 | 1.35 | 15.47 | 0.49 | 37 | 0.38 |
| 1500 | 1.45 | 11.87 | 0.46 | 44 | 0.35 |
| 2000 | 1.60 | 9.57 | 0.42 | 53 | 0.33 |
| 2500 | 1.75 | 7.90 | 0.36 | 60 | 0.22 |
| VCE = 3 V, Ic = 10 mA | | | | | |
| 500 | 1.55 | 21.70 | 0.44 | 15 | 0.44 |
| 800 | 1.60 | 18.13 | 0.40 | 30 | 0.41 |
| 1000 | 1.65 | 16.20 | 0.38 | 36 | 0.39 |
| 1500 | 1.80 | 12.85 | 0.34 | 44 | 0.37 |
| 2000 | 1.90 | 10.60 | 0.30 | 50 | 0.34 |
| 2500 | 2.00 | 8.82 | 0.27 | 55 | 0.23 |

NE68519

TYPICAL NOISE PARAMETERS (TA = 25°C)

| FREQ. (MHz) | NF _{OPT} (dB) | GA (dB) | Γ _{OPT} | | Rn/50 |
|--------------------------|---------------------------|------------|------------------|-----|-------|
| | | | MAG | ANG | |
| VCE = 2.5 V, Ic = 0.3 mA | | | | | |
| 500 | 1.07 | 12.6 | 0.80 | 17 | 1.70 |
| 800 | 1.25 | 8.6 | 0.79 | 32 | 1.55 |
| 1000 | 1.55 | 6.7 | 0.75 | 42 | 1.41 |
| VCE = 2.5 V, Ic = 1.0 mA | | | | | |
| 500 | 0.87 | 16.9 | 0.73 | 14 | 0.80 |
| 800 | 0.99 | 12.8 | 0.67 | 27 | 0.65 |
| 1000 | 1.08 | 11.0 | 0.64 | 36 | 0.62 |
| 1500 | 1.31 | 7.5 | 0.60 | 52 | 0.52 |
| 2000 | 1.65 | 5.0 | 0.54 | 65 | 0.42 |
| VCE = 3 V, Ic = 10 mA | | | | | |
| 500 | 1.05 | 19.3 | 0.65 | 14 | 0.57 |
| 800 | 1.12 | 15.8 | 0.58 | 27 | 0.50 |
| 1000 | 1.17 | 13.4 | 0.55 | 33 | 0.45 |
| 1500 | 1.31 | 9.9 | 0.50 | 47 | 0.38 |
| 2000 | 1.51 | 7.5 | 0.43 | 58 | 0.32 |
| 2500 | 1.75 | 5.5 | 0.32 | 69 | 0.21 |
| VCE = 3 V, Ic = 5.0 mA | | | | | |
| 500 | 1.33 | 19.4 | 0.58 | 13 | 0.54 |
| 800 | 1.40 | 15.3 | 0.52 | 26 | 0.49 |
| 1000 | 1.45 | 13.5 | 0.50 | 33 | 0.46 |
| 1500 | 1.57 | 10.0 | 0.43 | 46 | 0.42 |
| 2000 | 1.71 | 7.5 | 0.36 | 54 | 0.38 |
| 2500 | 1.90 | 5.6 | 0.29 | 60 | 0.31 |

NE68530

TYPICAL NOISE PARAMETERS (TA = 25°C)

| FREQ. (MHz) | NF _{OPT} (dB) | GA (dB) | Γ _{OPT} | | Rn/50 |
|---------------------------|---------------------------|------------|------------------|-----|-------|
| | | | MAG | ANG | |
| VCE = 0.5 V, Ic = 0.5 mA | | | | | |
| 500 | 0.95 | 10.87 | 0.81 | 15 | 1.20 |
| 800 | 1.05 | 7.82 | 0.75 | 24 | 1.02 |
| 1000 | 1.20 | 6.92 | 0.72 | 34 | 0.86 |
| VCE = 0.75 V, Ic = 0.5 mA | | | | | |
| 500 | 0.97 | 11.28 | 0.82 | 14 | 1.15 |
| 800 | 1.15 | 8.64 | 0.76 | 24 | 1.00 |
| 1000 | 1.25 | 7.62 | 0.73 | 33 | 0.84 |
| VCE = 1.0 V, Ic = 0.25 mA | | | | | |
| 500 | 1.10 | 8.73 | 0.85 | 13 | 1.69 |
| 800 | 1.20 | 6.83 | 0.80 | 25 | 1.65 |
| 1000 | 1.45 | 6.67 | 0.75 | 36 | 1.64 |
| VCE = 1.0 V, Ic = 0.5 mA | | | | | |
| 500 | 0.95 | 11.93 | 0.78 | 12 | 1.02 |
| 800 | 1.12 | 8.71 | 0.76 | 22 | 0.99 |
| 1000 | 1.28 | 8.35 | 0.69 | 32 | 0.86 |
| VCE = 1.0 V, Ic = 0.75 mA | | | | | |
| 500 | 0.90 | 12.92 | 0.77 | 11 | 0.92 |
| 800 | 1.02 | 10.03 | 0.73 | 21 | 0.84 |
| 1000 | 1.18 | 9.23 | 0.67 | 30 | 0.69 |
| VCE = 1.0 V, Ic = 1.0 mA | | | | | |
| 500 | 0.88 | 14.48 | 0.75 | 13 | 0.82 |
| 800 | 1.00 | 10.96 | 0.71 | 21 | 0.76 |
| 1000 | 1.14 | 9.83 | 0.66 | 29 | 0.62 |
| VCE = 1.0 V, Ic = 3.0 mA | | | | | |
| 500 | 0.98 | 17.29 | 0.60 | 10 | 0.52 |
| 800 | 1.07 | 13.62 | 0.57 | 18 | 0.50 |
| 1000 | 1.15 | 12.01 | 0.54 | 25 | 0.47 |
| 2000 | 1.52 | 6.41 | 0.43 | 27 | 0.38 |
| VCE = 2.5 V, Ic = 0.3 mA | | | | | |
| 500 | 1.10 | 10.77 | 0.85 | 14 | 1.49 |
| 800 | 1.30 | 7.48 | 0.81 | 22 | 1.45 |
| 1000 | 1.47 | 6.76 | 0.78 | 30 | 1.37 |
| VCE = 2.5 V, Ic = 1 mA | | | | | |
| 500 | 0.85 | 15.44 | 0.73 | 12 | 0.91 |
| 800 | 1.04 | 11.52 | 0.72 | 19 | 0.75 |
| 1000 | 1.16 | 10.45 | 0.69 | 27 | 0.68 |
| 2000 | 1.60 | 5.16 | 0.54 | 33 | 0.47 |
| VCE = 2.5 V, Ic = 3 mA | | | | | |
| 500 | 1.08 | 18.11 | 0.65 | 11 | 0.60 |
| 800 | 1.15 | 14.37 | 0.60 | 17 | 0.53 |
| 1000 | 1.22 | 12.76 | 0.58 | 23 | 0.49 |
| 2000 | 1.68 | 7.19 | 0.48 | 20 | 0.41 |
| VCE = 3 V, Ic = 3 mA | | | | | |
| 500 | 1.10 | 18.10 | 0.65 | 10 | 0.58 |
| 800 | 1.19 | 14.27 | 0.61 | 14 | 0.50 |
| 1000 | 1.25 | 12.77 | 0.60 | 23 | 0.49 |
| 2000 | 1.48 | 7.20 | 0.50 | 20 | 0.42 |
| 3000 | 1.74 | 5.22 | 0.32 | 28 | 0.22 |



NE685 SERIES

NE68533

TYPICAL NOISE PARAMETERS (TA = 25°C)







| FREQ. (MHz) | NF _{OPT} (dB) | GA (dB) | Γ _{OPT} | | Rn/50 |
|--------------------------|---------------------------|------------|------------------|-----|-------|
| | | | MAG | ANG | |
| VCE = 0.5 V, IC = 0.5 mA | | | | | |
| 500 | 0.9 | 12.03 | 0.76 | 19 | 1.19 |
| 800 | 1.1 | 10.22 | 0.72 | 37 | 0.84 |
| 1000 | 1.3 | 9.24 | 0.67 | 50 | 0.72 |
| VCE = 1.0 V, IC = 0.5 mA | | | | | |
| 500 | 0.9 | 13.19 | 0.75 | 18 | 1.23 |
| 800 | 1.0 | 10.87 | 0.73 | 35 | 0.89 |
| 1000 | 1.2 | 10.16 | 0.68 | 47 | 0.77 |
| VCE = 1.0 V, IC = 1.0 mA | | | | | |
| 500 | 0.9 | 14.57 | 0.73 | 17 | 0.74 |
| 800 | 1.0 | 12.04 | 0.67 | 33 | 0.54 |
| 1000 | 1.2 | 10.94 | 0.64 | 45 | 0.50 |
| VCE = 2.5 V, IC = 1 mA | | | | | |
| 500 | 0.9 | 15.67 | 0.73 | 16 | 0.77 |
| 800 | 1.0 | 12.73 | 0.68 | 30 | 0.57 |
| 1000 | 1.1 | 11.79 | 0.65 | 42 | 0.58 |
| 2000 | 1.6 | 4.73 | 0.59 | 53 | 0.36 |
| VCE = 2.5 V, IC = 3 mA | | | | | |
| 500 | 1.07 | 18.37 | 0.61 | 14 | 0.54 |
| 800 | 1.13 | 14.40 | 0.55 | 19 | 0.39 |
| 1000 | 1.30 | 13.15 | 0.56 | 35 | 0.40 |
| 2000 | 1.43 | 7.48 | 0.42 | 40 | 0.34 |
| 2500 | 1.63 | 6.59 | 0.24 | 69 | 0.22 |

NE68539

TYPICAL NOISE PARAMETERS (TA = 25°C)


| FREQ. (MHz) | NF _{OPT} (dB) | GA (dB) | Γ _{OPT} | | Rn/50 |
|--------------------------|---------------------------|------------|------------------|-----|-------|
| | | | MAG | ANG | |
| VCE = 2.5 V, IC = 0.3 mA | | | | | |
| 500 | 1.42 | 13.3 | 0.80 | 18 | 2.52 |
| 800 | 1.58 | 9.7 | 0.72 | 32 | 1.40 |
| 1000 | 1.70 | 8.0 | 0.64 | 43 | 1.29 |
| VCE = 2.5 V, IC = 1.0 mA | | | | | |
| 500 | 0.85 | 16.3 | 0.72 | 17 | 0.66 |
| 800 | 0.98 | 12.6 | 0.61 | 29 | 0.50 |
| 1000 | 1.07 | 11.0 | 0.51 | 40 | 0.48 |
| 1500 | 1.29 | 7.8 | 0.38 | 55 | 0.39 |
| 2000 | 1.52 | 6.2 | 0.30 | 67 | 0.32 |
| VCE = 2.5 V, IC = 3.0 mA | | | | | |
| 500 | 1.17 | 18.2 | 0.63 | 19 | 0.46 |
| 800 | 1.30 | 14.9 | 0.51 | 29 | 0.38 |
| 1000 | 1.39 | 13.2 | 0.34 | 33 | 0.34 |
| 1500 | 1.69 | 10.0 | 0.23 | 28 | 0.30 |
| 2000 | 2.00 | 7.6 | 0.17 | 13 | 0.25 |
| 2500 | 2.33 | 5.8 | 0.16 | -13 | 0.21 |
| VCE = 3 V, IC = 5.0 mA | | | | | |
| 500 | 1.27 | 19.5 | 0.57 | 17 | 0.44 |
| 800 | 1.40 | 15.8 | 0.41 | 25 | 0.38 |
| 1000 | 1.50 | 14.1 | 0.31 | 26 | 0.35 |
| 1500 | 1.81 | 10.9 | 0.23 | 21 | 0.29 |
| 2000 | 2.13 | 8.6 | 0.19 | 10 | 0.26 |
| 2500 | 2.47 | 6.8 | 0.17 | -10 | 0.22 |

TYPICAL PERFORMANCE CURVES (TA = 25°C)

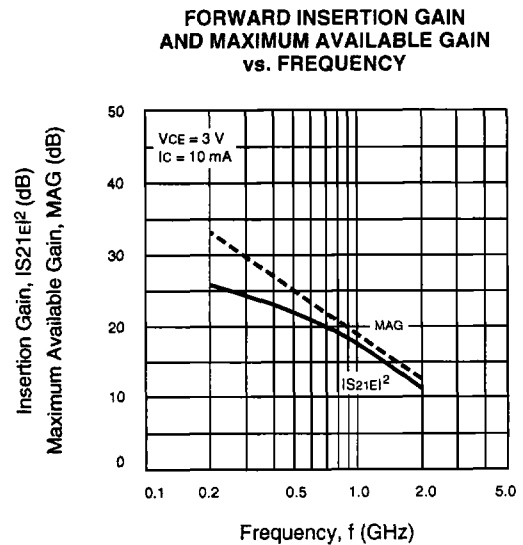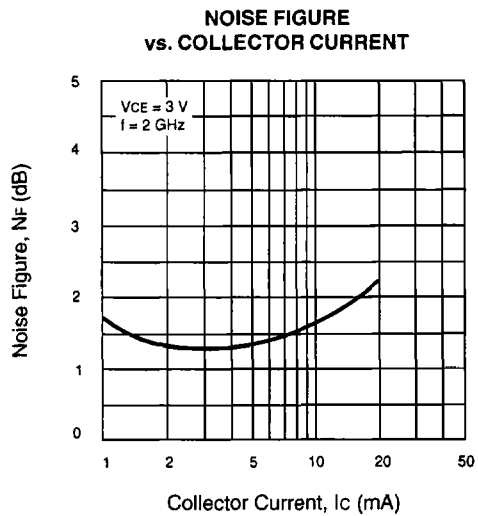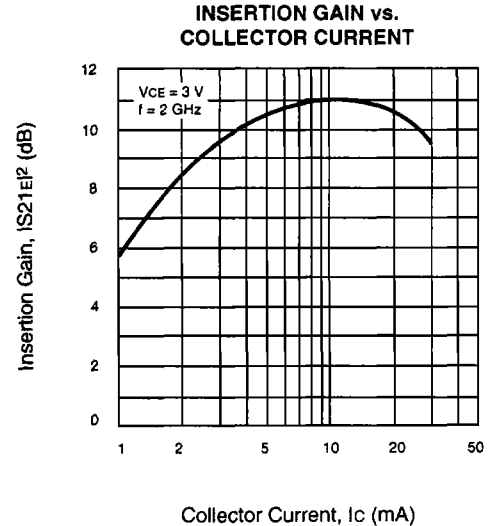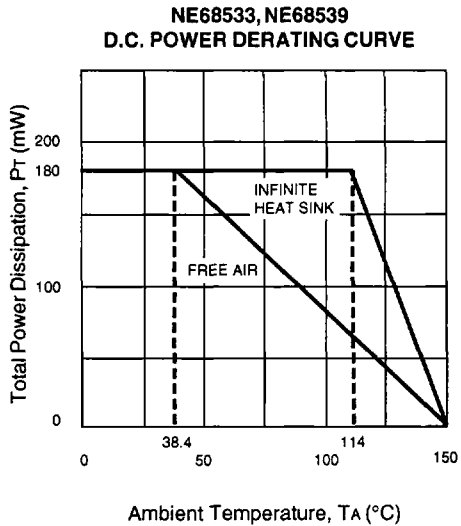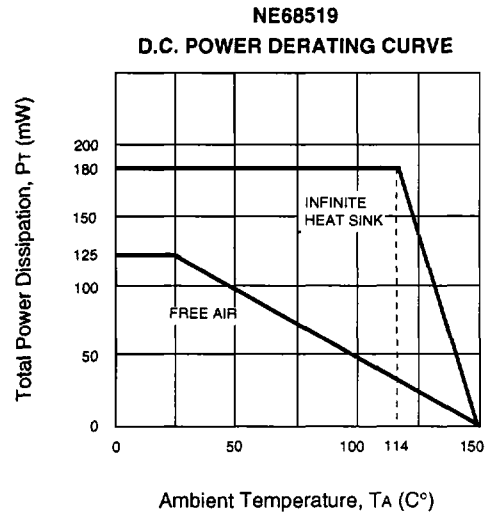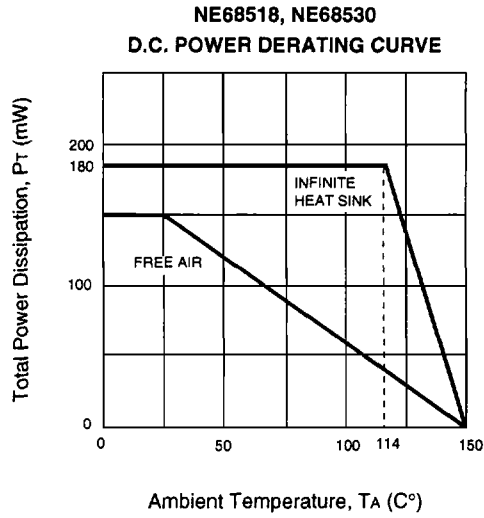


NE685 SERIES

TYPICAL SCATTERING PARAMETERS (TA = 25°C)

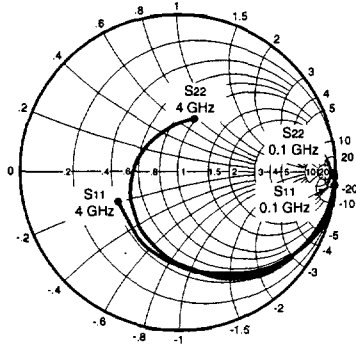

Coordinates in Ohms
Frequency in GHz
(VCE = 2.5 V, IC = 1 mA)

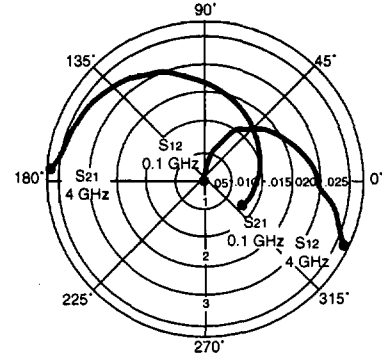

NE68518

VCE = 0.5 V, IC = 0.5 mA

| FREQUENCY GHz | S11 | | S21 | | S12 | | S22 | | K | MAG ¹ (dB) |
|------------------|-------|----------|-------|---------|-------|---------|-------|----------|-------|--------------------------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | | |
| 0.1 | 0.995 | -7.200 | 1.819 | 170.500 | 0.030 | 88.600 | 0.997 | -3.900 | 0.024 | 17.827 |
| 0.4 | 0.941 | -29.200 | 1.756 | 148.100 | 0.107 | 67.200 | 0.969 | -22.000 | 0.168 | 12.151 |
| 0.8 | 0.844 | -56.800 | 1.619 | 119.000 | 0.193 | 45.300 | 0.893 | -42.700 | 0.331 | 9.237 |
| 1.0 | 0.783 | -69.300 | 1.530 | 106.100 | 0.225 | 35.800 | 0.853 | -51.500 | 0.410 | 8.325 |
| 1.5 | 0.644 | -99.500 | 1.331 | 77.200 | 0.263 | 15.800 | 0.750 | -69.200 | 0.610 | 7.042 |
| 2.0 | 0.542 | -126.400 | 1.163 | 53.400 | 0.279 | -0.100 | 0.675 | -84.400 | 0.792 | 6.200 |
| 2.5 | 0.469 | -152.900 | 1.054 | 32.400 | 0.280 | -13.000 | 0.629 | -96.600 | 0.952 | 5.757 |
| 3.0 | 0.421 | -179.100 | 0.965 | 14.800 | 0.283 | -23.900 | 0.582 | -108.400 | 1.097 | 3.431 |

VCE = 1.0 V, IC = 1.0 mA

| | | | | | | | | | | |
|-----|-------|----------|-------|---------|-------|---------|-------|----------|-------|--------|
| 0.1 | 0.985 | -8.500 | 3.481 | 169.900 | 0.023 | 82.400 | 0.985 | -5.500 | 0.108 | 21.800 |
| 0.4 | 0.917 | -32.500 | 3.293 | 146.500 | 0.086 | 66.300 | 0.956 | -24.300 | 0.172 | 15.831 |
| 0.8 | 0.771 | -62.700 | 2.879 | 117.800 | 0.144 | 44.100 | 0.847 | -45.300 | 0.347 | 13.009 |
| 1.0 | 0.696 | -76.000 | 2.653 | 105.300 | 0.165 | 35.500 | 0.789 | -53.300 | 0.440 | 12.063 |
| 1.5 | 0.536 | -105.900 | 2.160 | 78.600 | 0.191 | 21.800 | 0.675 | -70.500 | 0.634 | 10.534 |
| 2.0 | 0.430 | -133.000 | 1.798 | 56.600 | 0.210 | 7.200 | 0.601 | -83.800 | 0.831 | 9.326 |
| 2.5 | 0.361 | -160.200 | 1.559 | 37.700 | 0.214 | -0.900 | 0.554 | -94.000 | 0.998 | 8.624 |
| 3.0 | 0.310 | 173.400 | 1.385 | 21.000 | 0.229 | -7.500 | 0.513 | -104.500 | 1.118 | 5.724 |
| 4.0 | 0.303 | 116.300 | 1.173 | -10.100 | 0.255 | -20.700 | 0.436 | -130.100 | 1.253 | 3.601 |

VCE = 2.5 V, IC = 1.0 mA

| | | | | | | | | | | |
|-----|-------|----------|-------|---------|-------|---------|-------|----------|-------|--------|
| 0.1 | 0.986 | -7.100 | 3.465 | 170.500 | 0.018 | 83.900 | 0.996 | -4.400 | 0.103 | 22.844 |
| 0.4 | 0.926 | -29.800 | 3.301 | 148.800 | 0.063 | 67.000 | 0.970 | -21.200 | 0.174 | 17.193 |
| 0.8 | 0.799 | -57.100 | 2.949 | 121.700 | 0.116 | 47.000 | 0.878 | -39.900 | 0.345 | 14.052 |
| 1.0 | 0.728 | -69.600 | 2.743 | 109.700 | 0.139 | 39.100 | 0.834 | -47.800 | 0.419 | 12.952 |
| 1.5 | 0.573 | -98.500 | 2.275 | 83.400 | 0.161 | 24.100 | 0.732 | -63.800 | 0.610 | 11.502 |
| 2.0 | 0.455 | -123.900 | 1.921 | 61.500 | 0.180 | 11.100 | 0.671 | -76.200 | 0.789 | 10.283 |
| 2.5 | 0.364 | -150.100 | 1.664 | 42.300 | 0.189 | 4.400 | 0.628 | -85.500 | 0.944 | 9.447 |
| 3.0 | 0.311 | -174.900 | 1.471 | 25.900 | 0.196 | -4.300 | 0.586 | -96.200 | 1.102 | 6.805 |
| 4.0 | 0.270 | 124.900 | 1.252 | -5.200 | 0.226 | -11.500 | 0.520 | -118.800 | 1.207 | 4.685 |



VCE = 3.0 V, IC = 10 mA

| | | | | | | | | | | |
|-----|-------|----------|--------|---------|-------|---------|-------|----------|-------|--------|
| 0.1 | 0.759 | -22.200 | 22.471 | 157.900 | 0.018 | 81.900 | 0.906 | -15.600 | 0.205 | 30.963 |
| 0.4 | 0.451 | -68.600 | 13.915 | 114.600 | 0.047 | 62.800 | 0.646 | -40.900 | 0.597 | 24.714 |
| 0.8 | 0.249 | -101.700 | 8.120 | 88.400 | 0.068 | 51.600 | 0.472 | -51.300 | 0.890 | 20.770 |
| 1.0 | 0.184 | -116.600 | 6.664 | 79.400 | 0.079 | 50.400 | 0.435 | -55.200 | 0.965 | 19.261 |
| 1.5 | 0.111 | -153.200 | 4.559 | 61.500 | 0.114 | 45.400 | 0.398 | -63.600 | 1.024 | 15.071 |
| 2.0 | 0.080 | 169.100 | 3.474 | 46.300 | 0.143 | 39.500 | 0.382 | -73.500 | 1.072 | 12.212 |
| 2.5 | 0.078 | 130.600 | 2.832 | 31.700 | 0.172 | 30.800 | 0.372 | -80.700 | 1.094 | 10.294 |
| 3.0 | 0.084 | 95.900 | 2.402 | 18.900 | 0.203 | 21.100 | 0.367 | -90.700 | 1.100 | 8.809 |
| 4.0 | 0.149 | 68.500 | 1.921 | -6.500 | 0.268 | 2.500 | 0.311 | -112.900 | 1.080 | 6.829 |
| 5.0 | 0.282 | 46.400 | 1.635 | -32.300 | 0.322 | -17.000 | 0.208 | -155.700 | 1.070 | 5.438 |

Note: 1. Gain Calculations:

$$MAG = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1}). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } MSG = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12}| |S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

TYPICAL SCATTERING PARAMETERS (TA = 25°C)

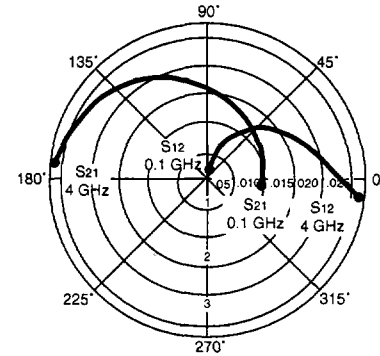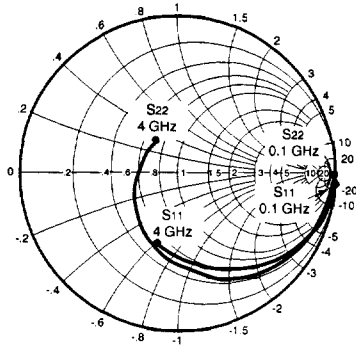

Coordinates in Ohms
Frequency in GHz
(VCE = 2.5 V, IC = 1 mA)

NE68519

VCE = 0.5 V, IC = 0.5 mA

| FREQUENCY GHz | S11 | | S21 | | S12 | | S22 | | K | MAG ¹ (dB) |
|------------------|-------|----------|-------|---------|-------|---------|-------|---------|-------|--------------------------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | | |
| 0.1 | 0.983 | -7.500 | 1.790 | 169.200 | 0.034 | 85.200 | 0.999 | -6.200 | 0.064 | 17.214 |
| 0.4 | 0.944 | -31.700 | 1.711 | 146.200 | 0.117 | 66.600 | 0.967 | -22.300 | 0.169 | 11.651 |
| 0.8 | 0.838 | -59.400 | 1.539 | 116.800 | 0.194 | 44.600 | 0.884 | -41.400 | 0.359 | 8.994 |
| 1.0 | 0.779 | -71.400 | 1.444 | 104.200 | 0.221 | 35.800 | 0.844 | -49.300 | 0.443 | 8.152 |
| 1.5 | 0.646 | -98.900 | 1.254 | 77.100 | 0.264 | 17.600 | 0.757 | -64.300 | 0.644 | 6.767 |
| 2.0 | 0.531 | -123.400 | 1.125 | 54.600 | 0.290 | 3.700 | 0.686 | -77.100 | 0.816 | 5.888 |
| 2.5 | 0.438 | -149.700 | 1.041 | 33.900 | 0.289 | -6.300 | 0.622 | -87.200 | 1.000 | 5.533 |
| 3.0 | 0.371 | 178.600 | 0.972 | 16.200 | 0.293 | -16.600 | 0.568 | -98.700 | 1.132 | 2.997 |

VCE = 1.0 V, IC = 1.0 mA

| | | | | | | | | | | |
|-----|-------|----------|-------|---------|-------|---------|-------|----------|-------|--------|
| 0.1 | 0.974 | -7.900 | 3.439 | 169.200 | 0.024 | 81.200 | 0.998 | -5.000 | 0.156 | 21.562 |
| 0.4 | 0.905 | -35.600 | 3.225 | 144.300 | 0.087 | 63.200 | 0.943 | -24.600 | 0.210 | 15.690 |
| 0.8 | 0.757 | -65.100 | 2.742 | 115.500 | 0.150 | 46.000 | 0.829 | -44.700 | 0.354 | 12.620 |
| 1.0 | 0.687 | -77.600 | 2.500 | 103.600 | 0.167 | 36.900 | 0.775 | -52.100 | 0.459 | 11.752 |
| 1.5 | 0.536 | -104.500 | 2.026 | 78.200 | 0.198 | 22.500 | 0.674 | -65.600 | 0.680 | 10.100 |
| 2.0 | 0.417 | -127.700 | 1.711 | 57.400 | 0.216 | 13.000 | 0.607 | -76.000 | 0.873 | 8.988 |
| 2.5 | 0.322 | -155.300 | 1.511 | 38.400 | 0.228 | 5.000 | 0.546 | -84.000 | 1.047 | 6.892 |
| 3.0 | 0.254 | 172.200 | 1.367 | 21.800 | 0.252 | -0.500 | 0.496 | -94.000 | 1.127 | 5.176 |
| 4.0 | 0.280 | 104.200 | 1.171 | -9.300 | 0.283 | -11.200 | 0.387 | -120.900 | 1.240 | 3.217 |

VCE = 2.5 V, IC = 1.0 mA

| | | | | | | | | | | |
|-----|-------|----------|-------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.983 | -9.100 | 3.424 | 169.500 | 0.020 | 83.400 | 0.996 | -6.000 | 0.070 | 22.335 |
| 0.4 | 0.913 | -31.900 | 3.197 | 147.200 | 0.078 | 66.500 | 0.961 | -21.800 | 0.190 | 16.126 |
| 0.8 | 0.784 | -59.700 | 2.774 | 119.400 | 0.127 | 48.500 | 0.864 | -39.700 | 0.347 | 13.393 |
| 1.0 | 0.714 | -71.600 | 2.548 | 107.600 | 0.144 | 39.600 | 0.818 | -46.700 | 0.450 | 12.478 |
| 1.5 | 0.566 | -97.300 | 2.102 | 82.700 | 0.173 | 25.900 | 0.727 | -59.900 | 0.653 | 10.846 |
| 2.0 | 0.448 | -119.900 | 1.783 | 62.000 | 0.190 | 17.100 | 0.659 | -69.500 | 0.844 | 9.724 |
| 2.5 | 0.346 | -142.800 | 1.564 | 43.800 | 0.201 | 10.000 | 0.609 | -77.700 | 1.022 | 7.997 |
| 3.0 | 0.272 | -169.700 | 1.425 | 27.300 | 0.217 | 4.500 | 0.564 | -86.900 | 1.127 | 6.005 |
| 4.0 | 0.242 | 121.300 | 1.229 | -3.600 | 0.258 | -5.400 | 0.465 | -110.900 | 1.216 | 3.974 |

VCE = 3.0 V, IC = 10 mA


| | | | | | | | | | | |
|-----|-------|----------|--------|---------|-------|---------|-------|----------|-------|--------|
| 0.1 | 0.768 | -24.000 | 22.184 | 155.700 | 0.020 | 73.100 | 0.903 | -17.800 | 0.300 | 30.450 |
| 0.4 | 0.433 | -70.300 | 12.973 | 112.600 | 0.048 | 61.600 | 0.612 | -41.800 | 0.645 | 24.318 |
| 0.8 | 0.234 | -98.400 | 7.396 | 87.200 | 0.076 | 55.200 | 0.451 | -49.200 | 0.915 | 19.882 |
| 1.0 | 0.183 | -107.300 | 6.039 | 78.700 | 0.089 | 53.500 | 0.424 | -51.300 | 0.979 | 18.316 |
| 1.5 | 0.103 | -121.300 | 4.147 | 61.400 | 0.126 | 47.300 | 0.399 | -56.300 | 1.046 | 13.865 |
| 2.0 | 0.056 | -130.100 | 3.169 | 46.700 | 0.161 | 40.900 | 0.388 | -62.200 | 1.081 | 11.202 |
| 2.5 | 0.011 | -162.800 | 2.593 | 33.400 | 0.198 | 33.300 | 0.382 | -68.200 | 1.086 | 9.379 |
| 3.0 | 0.022 | 82.000 | 2.234 | 20.700 | 0.234 | 24.600 | 0.357 | -76.700 | 1.090 | 7.974 |
| 4.0 | 0.129 | 68.400 | 1.809 | -4.400 | 0.306 | 6.100 | 0.260 | -102.000 | 1.078 | 6.017 |
| 5.0 | 0.249 | 49.800 | 1.548 | -29.200 | 0.375 | -14.000 | 0.164 | -146.600 | 1.052 | 4.760 |

See note on previous page.




NE685 SERIES

TYPICAL SCATTERING PARAMETERS (T_A = 25°C)

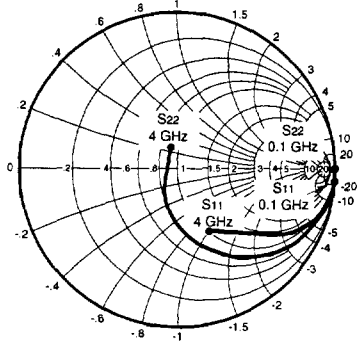

Coordinates in Ohms
Frequency in GHz
(V_{CE} = 2.5 V, I_c = 1 mA)

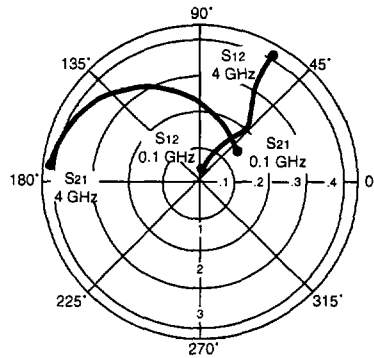

NE68530

V_{CE} = 0.5 V, I_c = 0.5 mA

| FREQUENCY GHz | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | | K | MAG ¹ (dB) |
|------------------|-----------------|----------|-----------------|---------|-----------------|--------|-----------------|---------|-------|--------------------------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | | |
| 0.1 | 0.986 | -6.400 | 1.839 | 171.000 | 0.030 | 84.600 | 0.997 | -4.000 | 0.098 | 17.875 |
| 0.4 | 0.938 | -24.300 | 1.763 | 152.600 | 0.121 | 72.200 | 0.963 | -15.800 | 0.207 | 11.635 |
| 0.8 | 0.821 | -47.300 | 1.612 | 128.100 | 0.213 | 57.300 | 0.873 | -29.300 | 0.384 | 8.790 |
| 1.0 | 0.749 | -58.200 | 1.542 | 117.000 | 0.246 | 51.000 | 0.821 | -35.000 | 0.472 | 7.971 |
| 1.5 | 0.581 | -82.800 | 1.356 | 93.900 | 0.298 | 38.700 | 0.695 | -46.100 | 0.685 | 6.580 |
| 2.0 | 0.457 | -106.100 | 1.198 | 76.100 | 0.313 | 30.900 | 0.607 | -54.900 | 0.863 | 5.829 |
| 2.5 | 0.368 | -130.100 | 1.091 | 61.700 | 0.310 | 27.300 | 0.542 | -63.100 | 1.030 | 4.410 |
| 3.0 | 0.323 | -155.200 | 1.007 | 51.400 | 0.302 | 27.500 | 0.501 | -71.000 | 1.162 | 2.791 |

V_{CE} = 1.0 V, I_c = 1.0 mA

| | | | | | | | | | | |
|-----|-------|----------|-------|---------|-------|--------|-------|---------|-------|--------|
| 0.1 | 0.986 | -7.300 | 3.516 | 170.100 | 0.025 | 85.700 | 0.993 | -4.800 | 0.082 | 21.481 |
| 0.4 | 0.900 | -28.100 | 3.231 | 150.600 | 0.098 | 71.400 | 0.939 | -18.100 | 0.220 | 15.181 |
| 0.8 | 0.735 | -52.300 | 2.766 | 126.000 | 0.167 | 58.000 | 0.812 | -32.000 | 0.418 | 12.191 |
| 1.0 | 0.651 | -63.100 | 2.541 | 115.400 | 0.190 | 52.900 | 0.747 | -37.300 | 0.516 | 11.263 |
| 1.5 | 0.463 | -87.200 | 2.070 | 94.800 | 0.228 | 45.400 | 0.609 | -46.400 | 0.741 | 9.580 |
| 2.0 | 0.339 | -109.400 | 1.735 | 79.200 | 0.248 | 42.300 | 0.521 | -52.900 | 0.922 | 8.448 |
| 2.5 | 0.258 | -135.300 | 1.517 | 66.600 | 0.265 | 42.400 | 0.458 | -59.300 | 1.053 | 6.169 |
| 3.0 | 0.219 | -160.300 | 1.358 | 57.100 | 0.285 | 43.800 | 0.419 | -65.400 | 1.131 | 4.582 |
| 4.0 | 0.220 | 149.000 | 1.143 | 41.200 | 0.341 | 46.700 | 0.377 | -79.400 | 1.163 | 2.803 |

V_{CE} = 2.5 V, I_c = 1.0 mA

| | | | | | | | | | | |
|-----|-------|----------|-------|---------|-------|--------|-------|---------|-------|--------|
| 0.1 | 0.975 | -6.900 | 3.412 | 171.000 | 0.022 | 83.700 | 0.990 | -4.700 | 0.106 | 21.906 |
| 0.4 | 0.905 | -26.200 | 3.207 | 151.400 | 0.078 | 72.200 | 0.948 | -16.300 | 0.220 | 16.140 |
| 0.8 | 0.756 | -48.000 | 2.779 | 128.300 | 0.138 | 60.800 | 0.841 | -28.000 | 0.410 | 13.040 |
| 1.0 | 0.682 | -57.100 | 2.569 | 118.500 | 0.156 | 56.100 | 0.792 | -32.300 | 0.506 | 12.166 |
| 1.5 | 0.509 | -75.600 | 2.098 | 100.000 | 0.188 | 51.600 | 0.679 | -38.900 | 0.727 | 10.476 |
| 2.0 | 0.387 | -89.500 | 1.762 | 85.500 | 0.208 | 50.400 | 0.616 | -43.100 | 0.909 | 9.279 |
| 2.5 | 0.289 | -102.100 | 1.550 | 74.500 | 0.223 | 53.100 | 0.577 | -45.600 | 1.042 | 7.169 |
| 3.0 | 0.207 | -114.700 | 1.397 | 65.200 | 0.247 | 55.100 | 0.548 | -47.900 | 1.118 | 5.439 |
| 4.0 | 0.079 | -165.800 | 1.190 | 51.000 | 0.315 | 61.100 | 0.510 | -53.000 | 1.133 | 3.557 |

V_{CE} = 3.0 V, I_c = 10 mA



| | | | | | | | | | | |
|-----|-------|---------|--------|---------|-------|--------|-------|---------|-------|--------|
| 0.1 | 0.764 | -21.200 | 20.910 | 154.700 | 0.020 | 82.600 | 0.910 | -15.900 | 0.241 | 30.193 |
| 0.4 | 0.414 | -54.500 | 11.575 | 114.900 | 0.052 | 72.800 | 0.590 | -31.900 | 0.732 | 23.475 |
| 0.8 | 0.224 | -63.500 | 6.493 | 96.100 | 0.091 | 71.000 | 0.457 | -31.300 | 0.946 | 18.534 |
| 1.0 | 0.181 | -63.500 | 5.306 | 90.300 | 0.109 | 70.500 | 0.433 | -30.900 | 0.989 | 16.873 |
| 1.5 | 0.112 | -57.800 | 3.640 | 80.700 | 0.157 | 73.300 | 0.396 | -30.600 | 1.035 | 12.510 |
| 2.0 | 0.090 | -42.600 | 2.805 | 72.600 | 0.202 | 70.700 | 0.389 | -32.300 | 1.054 | 10.009 |
| 2.5 | 0.086 | -27.100 | 2.314 | 66.400 | 0.250 | 69.600 | 0.392 | -34.300 | 1.048 | 8.331 |
| 3.0 | 0.090 | -16.300 | 2.002 | 60.500 | 0.292 | 67.100 | 0.389 | -36.400 | 1.047 | 7.030 |
| 4.0 | 0.098 | 6.000 | 1.619 | 50.800 | 0.379 | 63.200 | 0.374 | -41.800 | 1.033 | 5.200 |
| 5.0 | 0.119 | 48.700 | 1.441 | 42.600 | 0.464 | 57.500 | 0.307 | -49.900 | 1.009 | 4.333 |

Note:

1. Gain Calculation:

$$MAG = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1}). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } MSG = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12}| |S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

TYPICAL SCATTERING PARAMETERS (TA = 25°C)

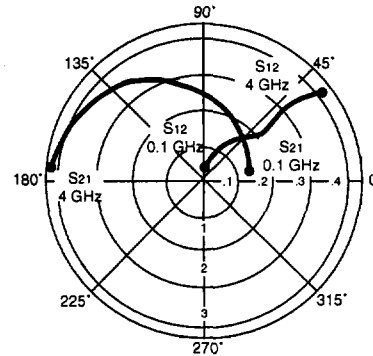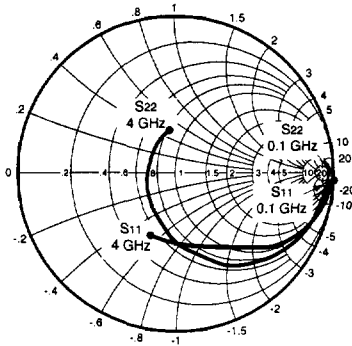

Coordinates in Ohms
Frequency in GHz
(VCE = 2.5 V, IC = 1 mA)

NE68533

VCE = 0.5 V, IC = 0.5 mA

| FREQUENCY GHz | S11 | | S21 | | S12 | | S22 | | K | MAG ¹ (dB) |
|------------------|-------|----------|-------|---------|-------|--------|-------|---------|-------|--------------------------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | | |
| 0.1 | 0.972 | -5.500 | 1.901 | 170.500 | 0.035 | 85.600 | 0.998 | -5.200 | 0.089 | 17.349 |
| 0.4 | 0.932 | -27.300 | 1.813 | 149.900 | 0.129 | 69.000 | 0.955 | -19.900 | 0.202 | 11.478 |
| 0.8 | 0.803 | -52.500 | 1.670 | 122.400 | 0.222 | 52.000 | 0.856 | -36.200 | 0.396 | 8.764 |
| 1.0 | 0.730 | -63.900 | 1.582 | 110.500 | 0.254 | 45.100 | 0.803 | -42.800 | 0.486 | 7.944 |
| 1.5 | 0.560 | -90.700 | 1.382 | 85.700 | 0.299 | 31.600 | 0.686 | -56.800 | 0.681 | 6.648 |
| 2.0 | 0.434 | -116.300 | 1.218 | 66.500 | 0.310 | 22.800 | 0.604 | -67.900 | 0.855 | 5.943 |
| 2.5 | 0.355 | -143.400 | 1.095 | 51.200 | 0.305 | 17.500 | 0.558 | -77.900 | 1.000 | 5.449 |
| 3.0 | 0.322 | -171.000 | 1.020 | 39.300 | 0.291 | 17.400 | 0.522 | -89.000 | 1.125 | 3.302 |

VCE = 1.0 V, IC = 1.0 mA

| | | | | | | | | | | |
|-----|-------|----------|-------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.968 | -7.000 | 3.509 | 170.100 | 0.029 | 84.200 | 0.995 | -5.800 | 0.103 | 20.828 |
| 0.4 | 0.887 | -31.300 | 3.234 | 147.200 | 0.103 | 68.200 | 0.928 | -21.900 | 0.231 | 14.969 |
| 0.8 | 0.708 | -58.800 | 2.767 | 119.700 | 0.170 | 52.700 | 0.790 | -37.900 | 0.443 | 12.116 |
| 1.0 | 0.618 | -70.000 | 2.533 | 108.800 | 0.192 | 47.400 | 0.727 | -43.700 | 0.544 | 11.203 |
| 1.5 | 0.432 | -96.400 | 2.036 | 86.400 | 0.223 | 39.300 | 0.601 | -55.000 | 0.767 | 9.605 |
| 2.0 | 0.304 | -122.100 | 1.711 | 69.000 | 0.243 | 36.000 | 0.521 | -63.300 | 0.948 | 8.476 |
| 2.5 | 0.233 | -150.700 | 1.482 | 55.100 | 0.260 | 35.300 | 0.473 | -71.100 | 1.071 | 5.929 |
| 3.0 | 0.208 | 178.200 | 1.339 | 43.600 | 0.283 | 36.100 | 0.439 | -79.700 | 1.122 | 4.625 |
| 4.0 | 0.243 | 125.700 | 1.142 | 25.100 | 0.358 | 36.500 | 0.396 | -100.200 | 1.097 | 3.140 |

VCE = 2.5 V, IC = 1.0 mA

| | | | | | | | | | | |
|-----|-------|----------|-------|---------|-------|--------|-------|---------|-------|--------|
| 0.1 | 0.965 | -6.600 | 3.502 | 170.700 | 0.024 | 83.800 | 0.997 | -4.900 | 0.112 | 21.641 |
| 0.4 | 0.899 | -28.400 | 3.250 | 149.500 | 0.087 | 70.400 | 0.942 | -18.800 | 0.222 | 15.724 |
| 0.8 | 0.735 | -53.600 | 2.835 | 123.300 | 0.146 | 55.900 | 0.823 | -33.100 | 0.429 | 12.882 |
| 1.0 | 0.647 | -64.000 | 2.618 | 112.700 | 0.166 | 50.800 | 0.767 | -38.300 | 0.529 | 11.979 |
| 1.5 | 0.459 | -88.200 | 2.135 | 90.500 | 0.196 | 43.200 | 0.651 | -48.400 | 0.751 | 10.371 |
| 2.0 | 0.320 | -110.600 | 1.797 | 73.100 | 0.216 | 40.500 | 0.576 | -55.900 | 0.934 | 9.201 |
| 2.5 | 0.233 | -137.000 | 1.559 | 59.000 | 0.234 | 40.400 | 0.531 | -62.900 | 1.053 | 6.834 |
| 3.0 | 0.185 | -167.900 | 1.404 | 47.600 | 0.258 | 41.900 | 0.498 | -70.400 | 1.106 | 5.378 |
| 4.0 | 0.201 | 131.100 | 1.194 | 28.900 | 0.337 | 42.900 | 0.459 | -88.600 | 1.062 | 3.973 |

VCE = 3.0 V, IC = 10 mA



| | | | | | | | | | | |
|-----|-------|---------|--------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.719 | -23.600 | 21.206 | 153.800 | 0.020 | 77.800 | 0.909 | -16.700 | 0.289 | 30.254 |
| 0.4 | 0.370 | -58.400 | 11.262 | 112.100 | 0.056 | 68.700 | 0.570 | -34.900 | 0.762 | 23.034 |
| 0.8 | 0.180 | -70.900 | 6.280 | 91.400 | 0.096 | 68.900 | 0.428 | -36.300 | 0.960 | 18.157 |
| 1.0 | 0.130 | -71.700 | 5.142 | 85.100 | 0.117 | 68.400 | 0.400 | -36.900 | 0.994 | 16.429 |
| 1.5 | 0.055 | -66.900 | 3.540 | 72.600 | 0.168 | 65.900 | 0.363 | -40.600 | 1.033 | 12.121 |
| 2.0 | 0.019 | 16.800 | 2.757 | 62.400 | 0.220 | 62.100 | 0.341 | -45.900 | 1.037 | 9.798 |
| 2.5 | 0.045 | 61.700 | 2.272 | 53.100 | 0.270 | 57.600 | 0.324 | -52.500 | 1.038 | 8.062 |
| 3.0 | 0.072 | 68.000 | 1.983 | 45.000 | 0.319 | 52.800 | 0.310 | -60.200 | 1.027 | 6.928 |
| 4.0 | 0.127 | 71.700 | 1.625 | 30.200 | 0.410 | 43.000 | 0.283 | -80.800 | 1.008 | 5.448 |
| 5.0 | 0.197 | 70.300 | 1.421 | 16.400 | 0.493 | 32.800 | 0.244 | -108.000 | 0.993 | 4.597 |

See notes on previous page.



NE685 SERIES

TYPICAL SCATTERING PARAMETERS (TA = 25°C)

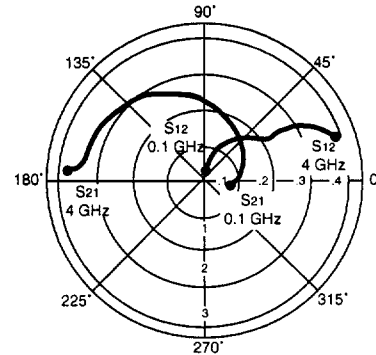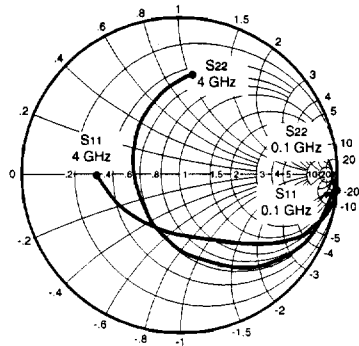

Coordinates in Ohms
Frequency in GHz
(VCE = 2.5 V, IC = 1 mA)

NE68539

VCE = 0.5 V, IC = 0.5 mA

| FREQUENCY GHz | S11 | | S21 | | S12 | | S22 | | K | MAG ¹ (dB) |
|------------------|-------|----------|-------|---------|-------|--------|-------|---------|-------|--------------------------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | | |
| 0.1 | 0.983 | -4.600 | 1.823 | 172.300 | 0.028 | 83.300 | 0.996 | -3.000 | 0.144 | 18.136 |
| 0.4 | 0.949 | -24.900 | 1.773 | 153.300 | 0.111 | 71.600 | 0.977 | -15.000 | 0.194 | 12.034 |
| 0.8 | 0.839 | -49.500 | 1.684 | 129.000 | 0.204 | 56.000 | 0.882 | -29.200 | 0.349 | 9.167 |
| 1.0 | 0.771 | -61.500 | 1.629 | 117.900 | 0.243 | 47.900 | 0.832 | -35.600 | 0.435 | 8.263 |
| 1.5 | 0.599 | -93.900 | 1.483 | 91.400 | 0.299 | 31.300 | 0.687 | -50.600 | 0.624 | 6.955 |
| 2.0 | 0.477 | -126.900 | 1.320 | 69.800 | 0.320 | 18.900 | 0.572 | -63.000 | 0.786 | 6.154 |
| 2.5 | 0.424 | -160.200 | 1.180 | 52.000 | 0.310 | 9.800 | 0.486 | -75.500 | 0.944 | 5.805 |
| 3.0 | 0.425 | 171.800 | 1.042 | 37.100 | 0.294 | 4.300 | 0.430 | -88.700 | 1.107 | 3.506 |

VCE = 1.0 V, IC = 1.0 mA

| | | | | | | | | | | |
|-----|-------|----------|-------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.965 | -6.400 | 3.534 | 171.400 | 0.025 | 86.300 | 0.994 | -3.900 | 0.082 | 21.503 |
| 0.4 | 0.906 | -29.000 | 3.355 | 151.200 | 0.088 | 71.600 | 0.951 | -17.600 | 0.186 | 15.812 |
| 0.8 | 0.753 | -56.200 | 3.000 | 126.600 | 0.156 | 55.400 | 0.823 | -32.200 | 0.379 | 12.840 |
| 1.0 | 0.667 | -69.300 | 2.801 | 116.000 | 0.179 | 48.400 | 0.757 | -38.400 | 0.469 | 11.945 |
| 1.5 | 0.478 | -103.100 | 2.346 | 91.800 | 0.217 | 36.900 | 0.600 | -51.500 | 0.674 | 10.339 |
| 2.0 | 0.369 | -138.400 | 1.960 | 73.000 | 0.236 | 28.900 | 0.488 | -62.100 | 0.846 | 9.193 |
| 2.5 | 0.339 | -173.000 | 1.682 | 57.500 | 0.238 | 25.800 | 0.405 | -73.300 | 1.006 | 8.021 |
| 3.0 | 0.359 | 160.600 | 1.457 | 44.300 | 0.247 | 23.100 | 0.349 | -85.900 | 1.119 | 5.613 |
| 4.0 | 0.452 | 126.000 | 1.171 | 22.900 | 0.268 | 23.000 | 0.304 | -117.800 | 1.199 | 3.709 |

VCE = 2.5 V, IC = 1.0 mA

| | | | | | | | | | | |
|-----|-------|----------|-------|---------|-------|--------|-------|---------|-------|--------|
| 0.1 | 0.982 | -4.000 | 3.461 | 173.900 | 0.017 | 84.600 | 0.998 | -2.900 | 0.109 | 23.088 |
| 0.4 | 0.921 | -24.700 | 3.323 | 154.500 | 0.071 | 73.000 | 0.966 | -14.200 | 0.195 | 16.703 |
| 0.8 | 0.775 | -48.800 | 3.034 | 131.200 | 0.125 | 60.000 | 0.875 | -25.800 | 0.363 | 13.851 |
| 1.0 | 0.700 | -60.600 | 2.877 | 121.000 | 0.145 | 53.700 | 0.816 | -30.800 | 0.452 | 12.976 |
| 1.5 | 0.502 | -89.800 | 2.460 | 97.900 | 0.182 | 42.900 | 0.684 | -41.100 | 0.658 | 11.309 |
| 2.0 | 0.364 | -122.500 | 2.089 | 79.200 | 0.197 | 37.100 | 0.583 | -49.700 | 0.834 | 10.255 |
| 2.5 | 0.300 | -157.800 | 1.805 | 64.200 | 0.207 | 33.300 | 0.501 | -58.100 | 0.996 | 9.405 |
| 3.0 | 0.309 | 170.700 | 1.578 | 50.800 | 0.216 | 33.300 | 0.448 | -68.100 | 1.100 | 6.713 |
| 4.0 | 0.401 | 130.100 | 1.274 | 29.000 | 0.249 | 34.000 | 0.386 | -94.100 | 1.146 | 4.768 |

VCE = 3.0 V, IC = 10 mA

| | | | | | | | | | | |
|-----|-------|----------|--------|---------|-------|--------|-------|----------|-------|--------|
| 0.1 | 0.729 | -20.700 | 21.452 | 158.500 | 0.016 | 80.400 | 0.933 | -12.700 | 0.233 | 31.273 |
| 0.4 | 0.417 | -58.000 | 12.831 | 117.900 | 0.044 | 68.700 | 0.639 | -31.100 | 0.689 | 24.648 |
| 0.8 | 0.196 | -81.600 | 7.430 | 96.000 | 0.077 | 67.000 | 0.472 | -33.200 | 0.927 | 19.845 |
| 1.0 | 0.133 | -92.600 | 6.128 | 89.300 | 0.092 | 65.700 | 0.426 | -33.900 | 0.984 | 18.235 |
| 1.5 | 0.060 | -155.000 | 4.250 | 76.100 | 0.133 | 64.000 | 0.357 | -37.400 | 1.033 | 13.938 |
| 2.0 | 0.101 | 144.800 | 3.281 | 65.500 | 0.171 | 61.200 | 0.303 | -44.600 | 1.054 | 11.406 |
| 2.5 | 0.164 | 125.900 | 2.687 | 56.400 | 0.207 | 57.300 | 0.249 | -54.500 | 1.068 | 9.535 |
| 3.0 | 0.230 | 117.000 | 2.295 | 47.600 | 0.246 | 53.400 | 0.208 | -67.800 | 1.055 | 8.262 |
| 4.0 | 0.349 | 104.600 | 1.808 | 31.300 | 0.311 | 44.000 | 0.160 | -112.500 | 1.035 | 6.491 |
| 5.0 | 0.450 | 93.100 | 1.506 | 16.700 | 0.367 | 33.500 | 0.199 | -160.400 | 1.011 | 5.500 |

Note:

1. Gain Calculation:


$$\text{MAG} = \frac{|S_{21}|}{|S_{12}|} \left(K \pm \sqrt{K^2 - 1} \right). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } \text{MSG} = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12}| |S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

NE68518 NONLINEAR MODEL

SCHEMATIC

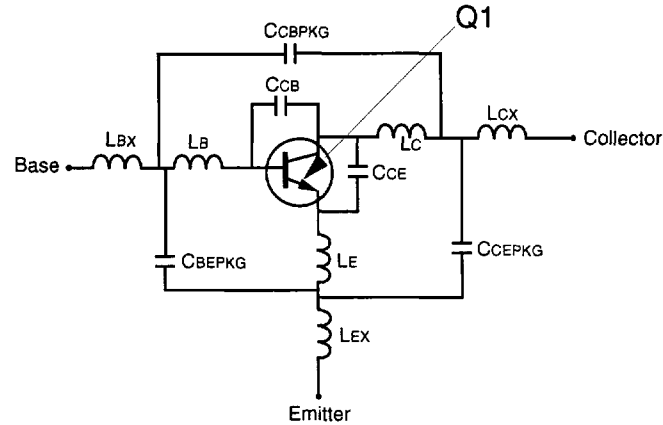

3

BJT NONLINEAR MODEL PARAMETERS (1)

| Parameters | Q1 | Parameters | Q1 |
|------------|----------|------------|-------|
| IS | 7e-16 | MJC | 0.34 |
| BF | 109 | XCJC | 0 |
| NF | 1 | CJS | 0 |
| VAF | 15 | VJS | 0.75 |
| IKF | 0.19 | MJS | 0 |
| ISE | 7.9e-13 | FC | 0.5 |
| NE | 2.19 | TF | 2e-12 |
| BR | 1 | XTF | 5.2 |
| NR | 1.08 | VTF | 4.58 |
| VAR | 12.4 | ITF | 0.011 |
| IKR | Infinity | PTF | 0 |
| ISC | 0 | TR | 1e-9 |
| NC | 2 | EG | 1.11 |
| RE | 1.3 | XTB | 0 |
| RB | 10 | XTI | 3 |
| RBM | 8.34 | KF | 0 |
| IRB | 0.009 | AF | 1 |
| RC | 10 | | |
| CJE | 0.4e-12 | | |
| VJE | 0.81 | | |
| MJE | 0.5 | | |
| CJC | 0.18e-12 | | |
| VJC | 0.75 | | |

(1) Gummel-Poon Model

UNITS

| Parameter | Units |
|-------------|---------|
| time | seconds |
| capacitance | farads |
| inductance | henries |
| resistance | ohms |
| voltage | volts |
| current | amps |

ADDITIONAL PARAMETERS

| Parameters | NE68518 |
|------------|-----------|
| CcB | 0.13e-12 |
| CcE | 0.14e-12 |
| Lb | 1.55e-9 |
| Lc | 1.25e-9 |
| Le | 0.94e-9 |
| CcBPKG | 0.066e-12 |
| CcEPKG | 0.44e-12 |
| CcBEPKG | 0.36e-12 |
| LbX | 0.18e-9 |
| LcX | 0.18e-9 |
| LEx | 0.09e-9 |


MODEL RANGE

Frequency: 0.05 to 3.0 GHz
 Bias: VCE = 0.5 V to 3.0 V, IC = 0.5 mA to 20 mA

NE685 SERIES

NE68519 NONLINEAR MODEL

SCHEMATIC

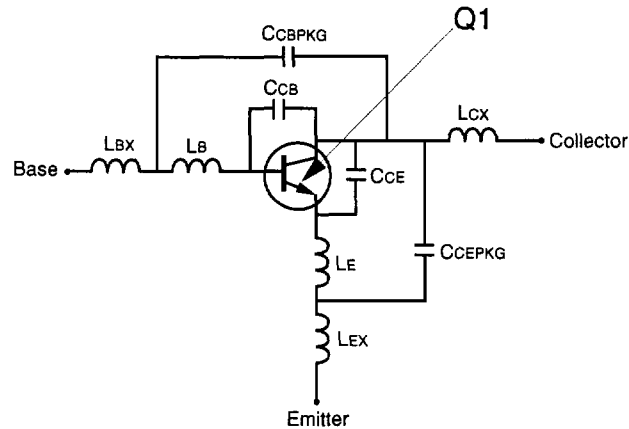

BJT NONLINEAR MODEL PARAMETERS (1)

| Parameters | Q1 | Parameters | Q1 |
|------------|----------|------------|---------|
| IS | 7.0e-16 | MJC | 0.34 |
| BF | 109 | XCJC | 0 |
| NF | 1 | CJS | 0 |
| VAF | 15 | VJS | 0.75 |
| IKF | 0.19 | MJS | 0 |
| ISE | 7.90e-13 | FC | 0.5 |
| NE | 2.19 | TF | 2.0e-12 |
| BR | 1 | XTF | 5.2 |
| NR | 1.08 | VTF | 4.58 |
| VAR | 12.4 | ITF | 0.011 |
| IKR | Infinity | PTF | 0 |
| ISC | 0 | TR | 1.0e-9 |
| NC | 2 | EG | 1.11 |
| RE | 1.3 | XTB | 0 |
| RB | 10 | XTI | 3 |
| RBM | 8.34 | KF | 0 |
| IRB | 0.009 | AF | 1 |
| RC | 10 | | |
| CJE | 0.4e-12 | | |
| VJE | 0.81 | | |
| MJE | 0.5 | | |
| CJC | 0.18e-12 | | |
| VJC | 0.75 | | |

(1) Gummel-Poon Model

UNITS

| Parameter | Units |
|-------------|---------|
| time | seconds |
| capacitance | farads |
| inductance | henries |
| resistance | ohms |
| voltage | volts |
| current | amps |

ADDITIONAL PARAMETERS

| Parameters | 68519 |
|------------|----------|
| Ccb | 0.13e-12 |
| Cce | 0.14e-12 |
| Lb | 0.9e-9 |
| Le | 0.9e-9 |
| Ccbpkg | 0.17e-12 |
| Ccepkg | 0.21e-12 |
| Lbx | 0.19e-9 |
| Lcx | 0.19e-9 |
| Lex | 0.19e-9 |


MODEL RANGE

Frequency: 0.05 to 3.0 GHz

Bias: $V_{CE} = 0.5 \text{ V to } 3.0 \text{ V}$, $I_C = 0.5 \text{ mA to } 20 \text{ mA}$

NE68530 NONLINEAR MODEL

SCHEMATIC

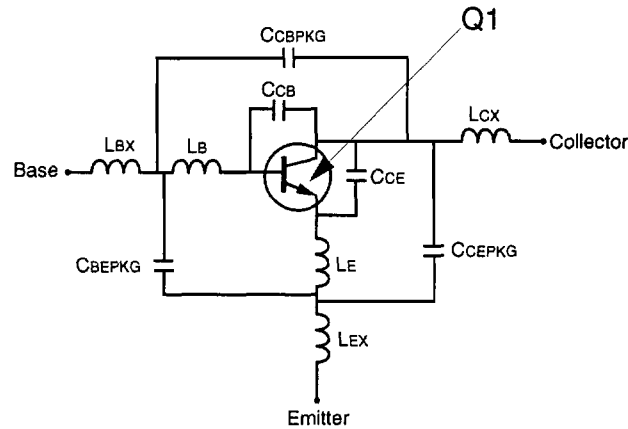

3

BJT NONLINEAR MODEL PARAMETERS (1)

| Parameters | Q1 | Parameters | Q1 |
|------------|----------|------------|-------|
| IS | 7e-16 | MJC | 0.34 |
| BF | 109 | XCJC | 0 |
| NF | 1 | CJS | 0 |
| VAF | 15 | VJS | 0.75 |
| IKF | 0.19 | MJS | 0 |
| ISE | 7.9e-13 | FC | 0.5 |
| NE | 2.19 | TF | 2e-12 |
| BR | 1 | XTF | 5.2 |
| NR | 1.08 | VTF | 4.58 |
| VAR | 12.4 | ITF | 0.011 |
| IKR | Infinity | PTF | 0 |
| ISC | 0 | TR | 1e-9 |
| NC | 2 | EG | 1.11 |
| RE | 1.3 | XTB | 0 |
| RB | 10 | XTI | 3 |
| RBM | 8.34 | KF | 0 |
| IRB | 0.009 | AF | 1 |
| RC | 10 | | |
| CJE | 0.40e-12 | | |
| VJE | 0.81 | | |
| MJE | 0.5 | | |
| CJC | 0.18e-12 | | |
| VJC | 0.75 | | |

(1) Gummel-Poon Model

UNITS

| Parameter | Units |
|-------------|---------|
| time | seconds |
| capacitance | farads |
| inductance | henries |
| resistance | ohms |
| voltage | volts |
| current | amps |

ADDITIONAL PARAMETERS


| Parameters | 68530 |
|------------|----------|
| CCB | 0.13e-12 |
| CCE | 0.14e-12 |
| LB | 0.41e-9 |
| LE | 1.43e-9 |
| CCBPKG | 0.12e-12 |
| CCEPKG | 0.04e-12 |
| CBEPKG | 0.04e-12 |
| LBX | 0.2e-9 |
| LCX | 0.2e-9 |
| LEX | 0.2e-9 |

MODEL RANGE

Frequency: 0.05 to 3.0 GHz
 Bias: VCE = 0.5 V to 3 V, IC = 0.5 mA to 10 mA
 Date: 10/25/96

NE68533 NONLINEAR MODEL

SCHEMATIC

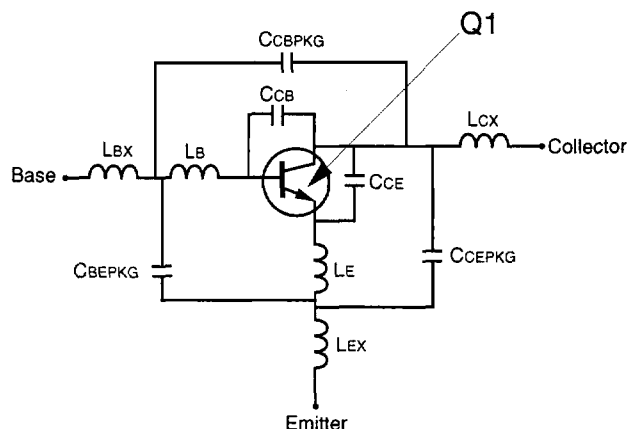

BJT NONLINEAR MODEL PARAMETERS (1)

| Parameters | Q1 | Parameters | Q1 |
|------------|----------|------------|-------|
| IS | 7e-16 | MJC | 0.34 |
| BF | 109 | XCJC | 0 |
| NF | 1 | CJS | 0 |
| VAF | 15 | VJS | 0.75 |
| IKF | 0.19 | MJS | 0 |
| ISE | 7.9e-13 | FC | 0.5 |
| NE | 2.19 | TF | 2e-12 |
| BR | 1 | XTF | 5.2 |
| NR | 1.08 | VTF | 4.58 |
| VAR | 12.4 | ITF | 0.011 |
| IKR | Infinity | PTF | 0 |
| ISC | 0 | TR | 1e-9 |
| NC | 2 | EG | 1.11 |
| RE | 1.3 | XTB | 0 |
| RB | 10 | XTI | 3 |
| RBM | 8.34 | KF | 0 |
| IRB | 0.009 | AF | 1 |
| RC | 10 | | |
| CJE | 0.40e-12 | | |
| VJE | 0.81 | | |
| MJE | 0.5 | | |
| CJC | 0.18e-12 | | |
| VJC | 0.75 | | |

(1) Gummel-Poon Model

UNITS

| Parameter | Units |
|-------------|---------|
| time | seconds |
| capacitance | farads |
| inductance | henries |
| resistance | ohms |
| voltage | volts |
| current | amps |

ADDITIONAL PARAMETERS


| Parameters | 68533 |
|------------|----------|
| CCB | 0.13e-12 |
| CCE | 0.14e-12 |
| LB | 0.85e-9 |
| LE | 1.15e-9 |
| CCBPKG | 0.15e-12 |
| CCEPKG | 0.1e-12 |
| CBEPKG | 0.05e-12 |
| LBX | 0.3e-9 |
| LCX | 0.3e-9 |
| LEX | 0.3e-9 |

MODEL RANGE

Frequency: 0.05 to 3.0 GHz
 Bias: VCE = 0.5 V to 6 V, IC = 0.5 mA to 20 mA
 Date: 7/97

NE68539 NONLINEAR MODEL

SCHMATIC

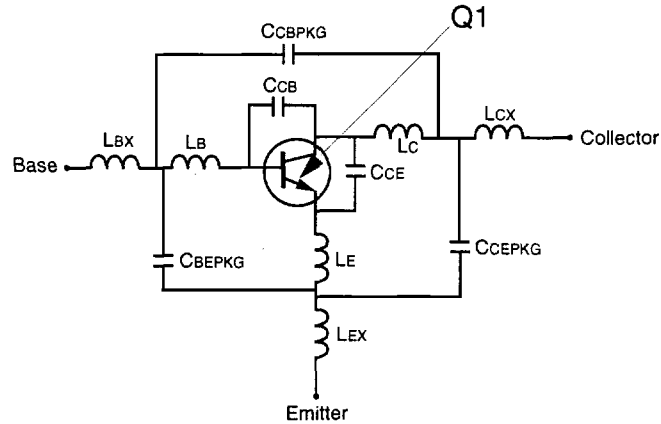

3

BJT NONLINEAR MODEL PARAMETERS (1)

| Parameters | Q1 | Parameters | Q1 |
|------------|----------|------------|-------|
| IS | 7e-16 | MJC | 0.34 |
| BF | 109 | XCJC | 0 |
| NF | 1 | CJS | 0 |
| VAF | 15 | VJS | 0.75 |
| IKF | 0.19 | MJS | 0 |
| ISE | 7.9e-13 | FC | 0.5 |
| NE | 2.19 | TF | 2e-12 |
| BR | 1 | XTF | 5.2 |
| NR | 1.08 | VTF | 4.58 |
| VAR | 12.4 | ITF | 0.011 |
| IKR | Infinity | PTF | 0 |
| ISC | 0 | TR | 1e-9 |
| NC | 2 | EG | 1.11 |
| RE | 1.3 | XTB | 0 |
| RB | 10 | XTI | 3 |
| RBM | 8.34 | KF | 0 |
| IRB | 0.009 | AF | 1 |
| RC | 10 | | |
| CJE | 0.4e-12 | | |
| VJE | 0.81 | | |
| MJE | 0.5 | | |
| CJC | 0.18e-12 | | |
| VJC | 0.75 | | |

(1) Gummel-Poon Model

UNITS

| Parameter | Units |
|-------------|---------|
| time | seconds |
| capacitance | farads |
| inductance | henries |
| resistance | ohms |
| voltage | volts |
| current | amps |

ADDITIONAL PARAMETERS

| Parameters | 68539 |
|------------|----------|
| CCB | 0.13e-12 |
| CCE | 0.14e-12 |
| LB | 1.34e-9 |
| LC | 0.7e-9 |
| LE | 0.99e-9 |
| CCBPKG | 0.08e-12 |
| CCEPKG | 0.08e-12 |
| CBEPKG | 0.01e-12 |
| LBX | 0.39e-9 |
| LCX | 0.39e-9 |
| LEX | 0.2e-9 |


MODEL RANGE

Frequency: 0.05 to 3.0 GHz
 Bias: VCE = 0.5 V to 3.0 V, IC = 0.5 mA to 20 mA
 Date: 6/12/96


NE685 SERIES

OUTLINE DIMENSIONS¹ (Units in mm)


PACKAGE OUTLINE 18
(SOT-343)

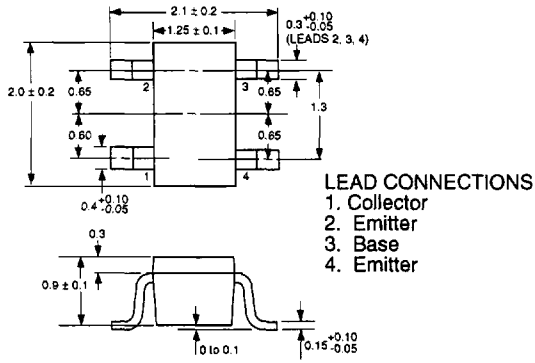


OUTLINE 18
RECOMMENDED P.C.B. LAYOUT

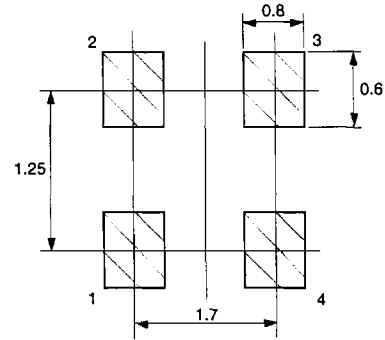


PACKAGE OUTLINE 19

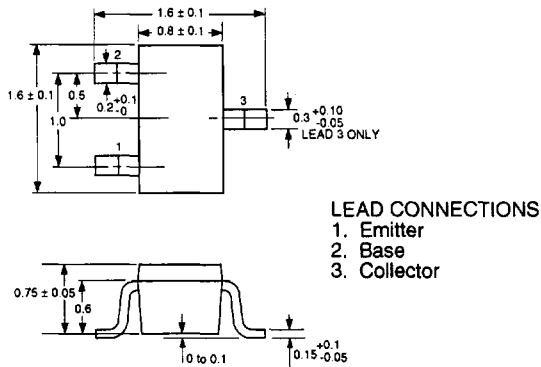


OUTLINE 19
RECOMMENDED P.C.B. LAYOUT

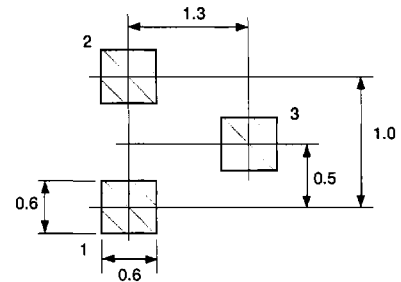

PACKAGE OUTLINE 30
(SOT-323)

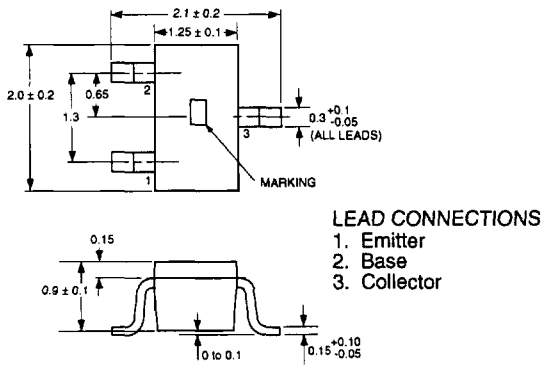


OUTLINE 30
RECOMMENDED P.C.B. LAYOUT

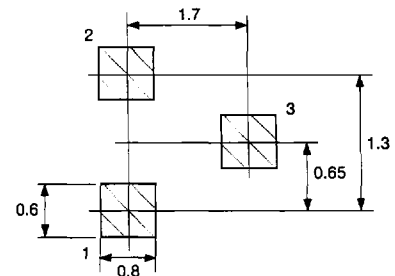


OUTLINE DIMENSIONS¹ (Units in mm)

PACKAGE OUTLINE 33
(SOT-23)

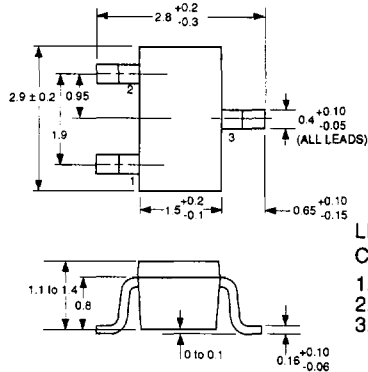


LEAD CONNECTIONS
1. Emitter
2. Base
3. Collector

OUTLINE 33
RECOMMENDED P.C.B. LAYOUT

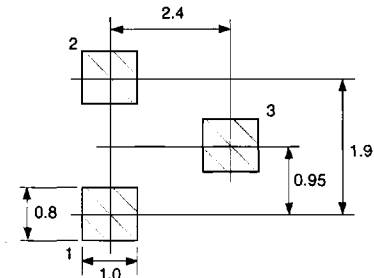


PACKAGE OUTLINE 39
(SOT-143)

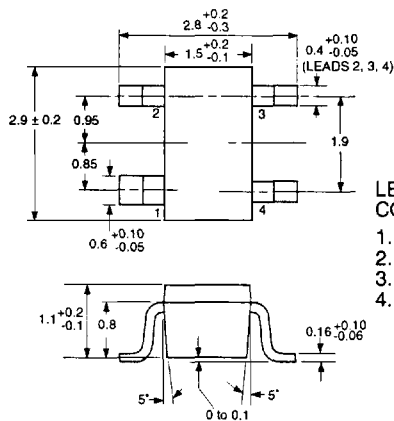


LEAD CONNECTIONS
1. Collector
2. Emitter
3. Base
4. Emitter

OUTLINE 39
RECOMMENDED P.C.B. LAYOUT

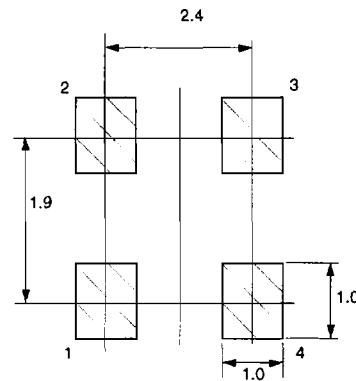


PACKAGE OUTLINE 39R
(SOT-143)

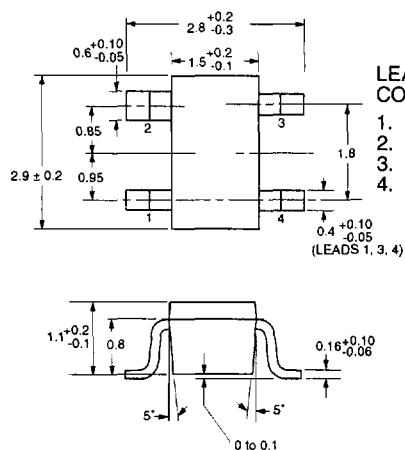

LEAD CONNECTIONS
1. Emitter
2. Collector
3. Emitter
4. Base

OUTLINE 39R
RECOMMENDED P.C.B. LAYOUT

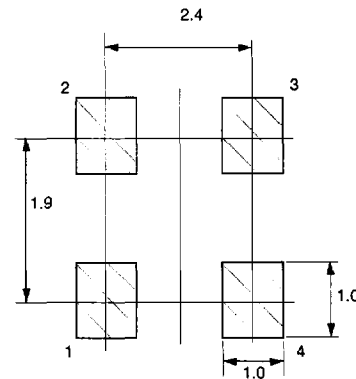

ORDERING INFORMATION

| PART NUMBER | QUANTITY | PACKAGING |
|-------------|----------|-------------|
| NE68518-T1 | 3000 | Tape & Reel |
| NE68519-T1 | 3000 | Tape & Reel |
| NE68530-T1 | 3000 | Tape & Reel |
| NE68533-T1 | 3000 | Tape & Reel |
| NE68539-T1 | 3000 | Tape & Reel |
| NE68539R-T1 | 3000 | Tape & Reel |

Note:
1. Lead material: Cu
Lead plating: PbSn

3