
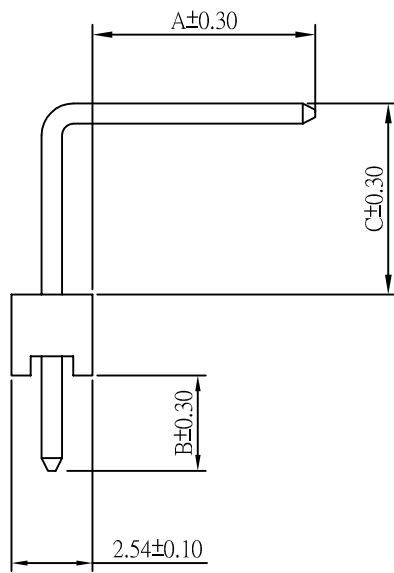



REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

CUSTOMER COPY

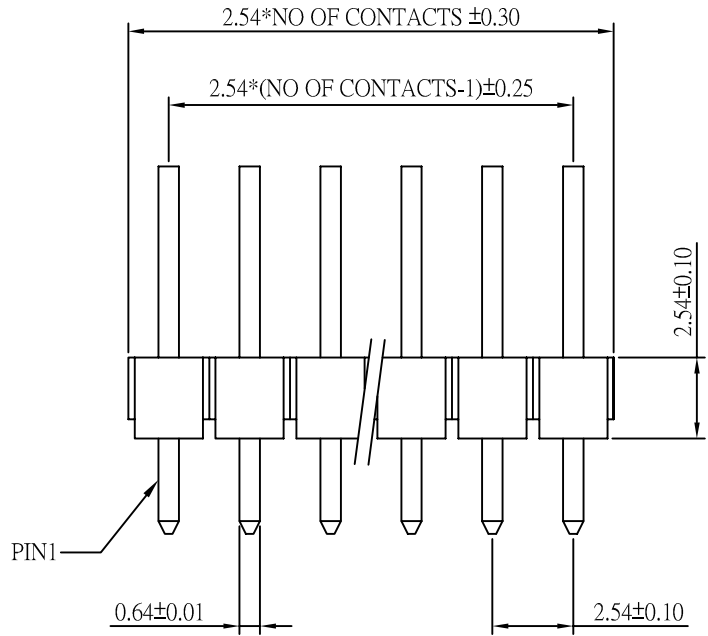

ORDER INFORMATION

184 02 XX XX X

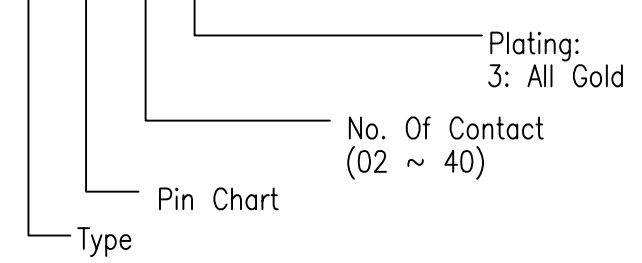

SPECIFICATION


- \* Current Rating: 3 A
- \* Withstanding Voltage: 800 VAC ( 1 min. )
- \* Insulation Resistance: 1000 Megohms min.
- \* Contact Resistance: 30 Milliohms max.
- \* Operating Temperature: -40°C to +85°C
- \* RETENTION FORCE: 750g MIN.

MATERIAL

- \* Contact: Brass , 0.64mm square post
- \* Insulator: PBT & 30% G.F.
- \* Plating: Gold

Pin Chart

No.	A	B	C	NC PIN
00	8.00	2.00	0.80	2,4,5,6,7,9,10,11
01	15.10	2.06	0.64	2,4,5,6,7,9,10,11
02	3.00	3.00	4.02	2,6
03				
04				
05				
06				

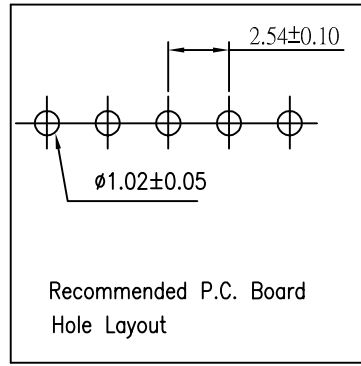

**ACMELUX CO., LTD.**

TEL:886-2-85124595 FAX:886-2-85124322

0.0±	SCALE:	TITLE:	PART NO: C111300
0.00±	UNIT: MM	2.54MM (.100") Center Pin HEADER R/A Single Row	APP BY:
0.000±			CHK BY:
		MATL:	DR BY: JACK LIN
		DWG. NO. C18402XXXXX	