
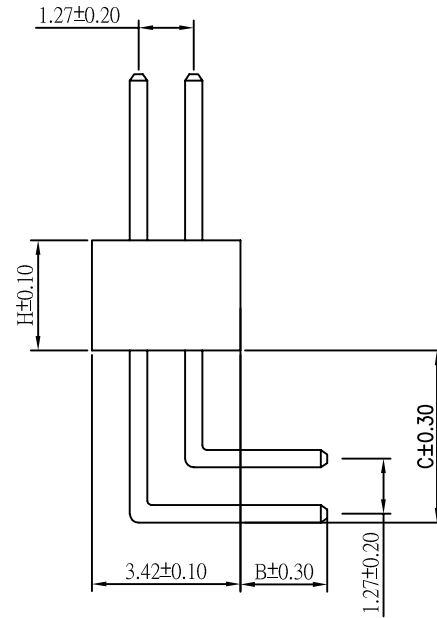


CUSTOMER COPY


REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

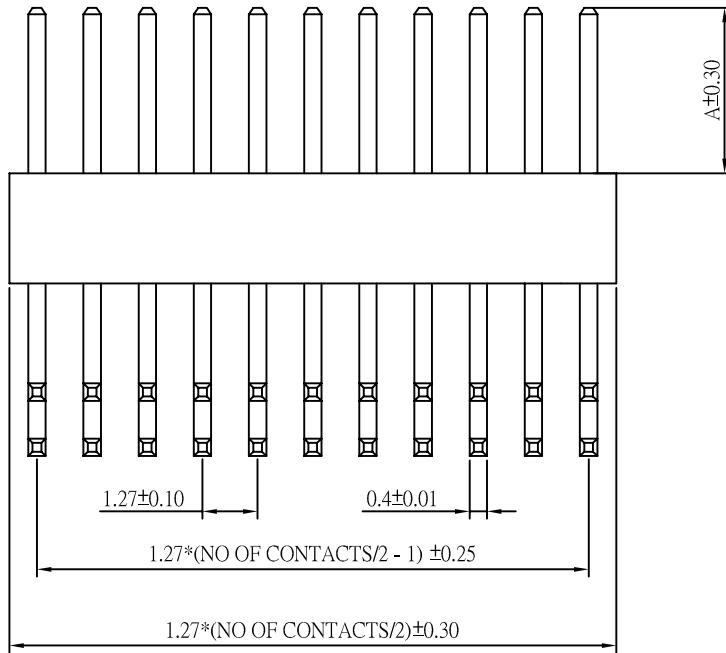

SPECIFICATION

- * Current Rating: 1 A
- * Withstanding Voltage: 600 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -55°C to $+105^{\circ}\text{C}$
- * Retention Force: 450g MIN.

ORDER INFORMATION

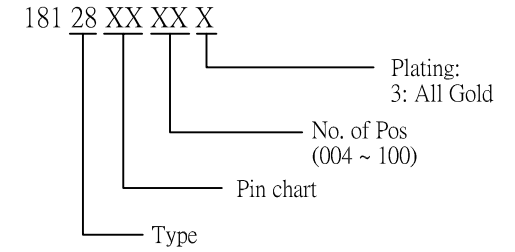


MATERIAL

- * Contact: Phosphor Bronze , Brass
0.40mm square post
- * Insulator: Hige temperature plastic
- * Plating: Gold

Pin Chart

No.	A	B	C	H
00	3.20	2.30	4.70	1.00
01	3.00	2.00	2.20	1.50
02	3.00	3.00	2.50	1.50
03	4.00	3.00	3.00	1.50
04	3.50	1.80	2.67	1.50
05	4.00	4.00	3.00	1.50



		ACMELUX CO., LTD. TEL:886-85124595 FAX:886-85124322	
		0.0± 0.00± 0.000±	SCALE: UNIT: MM
		MATL: DWG. NO. C18128XXXXX	CHK BY: DR BY: JACK LIN