


**GENERAL DESCRIPTION**

The S30-28 is designed for driver and output applications in the HF, 1.5-30 MHz range. It features state of the art ruggedness and linearity and may be operated Class A, AB or C.

**S30-28**  
**30 WATTS -28 VOLTS**  
**1.5-30 MHz**

**HF COMMUNICATIONS**

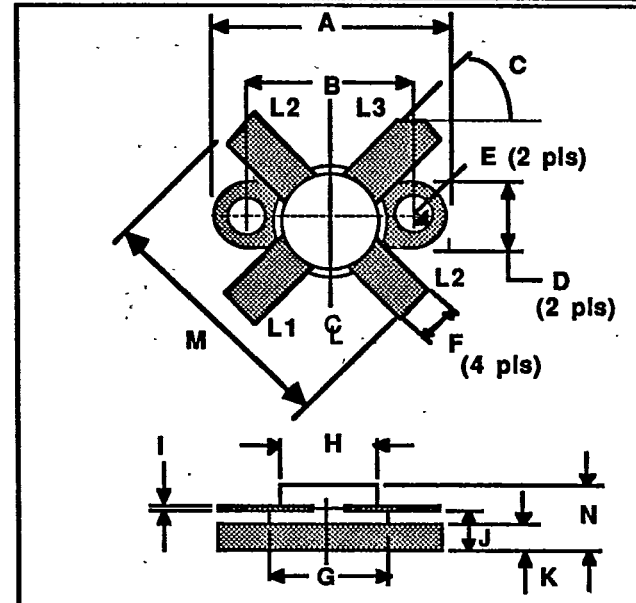

**ABSOLUTE MAXIMUM RATINGS**



Maximum Power Dissipation @ 25°C Case Temperature  
 Total Power Dissipation **65 W**

Maximum Voltage and Current  
 BVces Collector to Emitter Voltage **60 V**  
 BVebo Emitter to Base Voltage **4.0 V**  
 Ic Collector Current **4.0 A**

Maximum Temperatures  
 Storage Temperature **-65 to +150 °C**  
 Operating Junction Temperature **+200 °C**

DIM	Millimeter	TOL	Inches	TOL
A	24.76	.13	.975	.005
B	18.41	.13	.725	.005
C	45°	5°	45°	5°
D	6.35	.13	.250	.005
E	3.17	.13	.125	.005
F	5.69	.13	.224	.005
G	9.52	.13	.375	.005
H	8.63	.13	.340	.005
I	0.13	.02	.005	.001
J	4.32	.13	.170	.005
K	2.54	.13	.100	.005
M	25.55	.25	1.006	.010
N	6.68	REF	.263	REF

**POWER OUTPUT VS POWER INPUT (TYPICAL)**

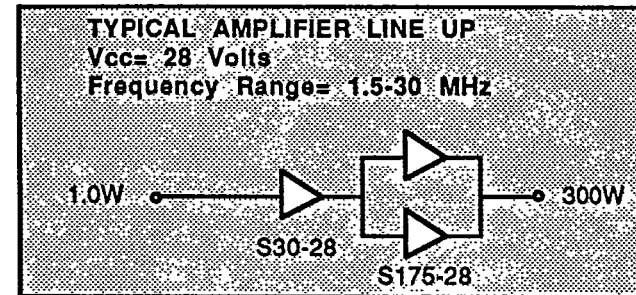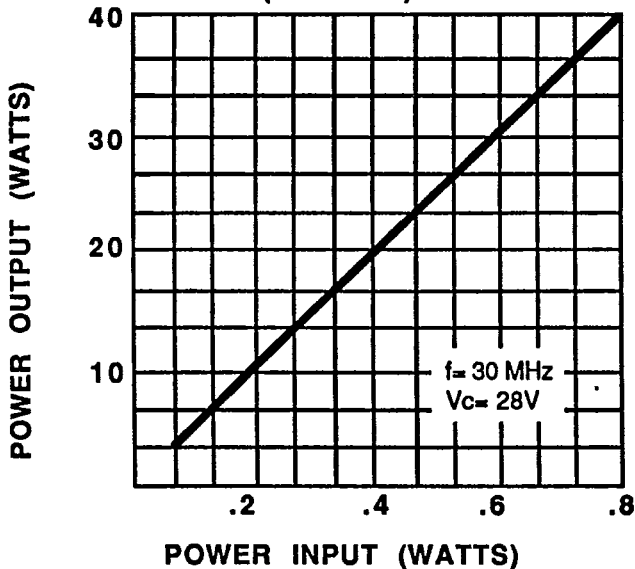


**S30-28-2**

**ELECTRICAL CHARACTERISTICS<sup>1</sup>**


SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
P <sub>out</sub>	Power Output	f= 30 MHz V <sub>cc</sub> = 28V	30			Watts
P <sub>in</sub>	Power Input				1.0	Watts
V <sub>SWR</sub>	Output VSWR Capability				∞ :1	
B <sub>Vebo</sub>	Breakdown Voltage (Emitter to Base)	I <sub>c</sub> = 0A, I <sub>e</sub> = 5mA	4.0			Volts
B <sub>Vces</sub>	Breakdown Voltage (Collector to Emitter)	V <sub>be</sub> = 0A, I <sub>c</sub> = 15mA	60			Volts
B <sub>Vceo</sub>	Breakdown Voltage (Collector to Emitter)	I <sub>b</sub> = 0A, I <sub>c</sub> = 50mA	33			Volts
IMD	Intermodulation Distortion	At 30 W (PEP) output		-38	-34	dBc
C <sub>ob</sub>	Capacitance-Collector to Base	V <sub>cb</sub> = 28V, f=1 MHz		40		pF
h <sub>FE</sub>	DC-Current Gain	V <sub>ce</sub> = 4V, I <sub>c</sub> = 1a	10		100	
θ <sub>jc</sub>	Thermal Resistance				2.7	°C/W

Note 1: T<sub>c</sub> = +25°C unless otherwise specified

**IMD VS POWER OUT (TYPICAL)**

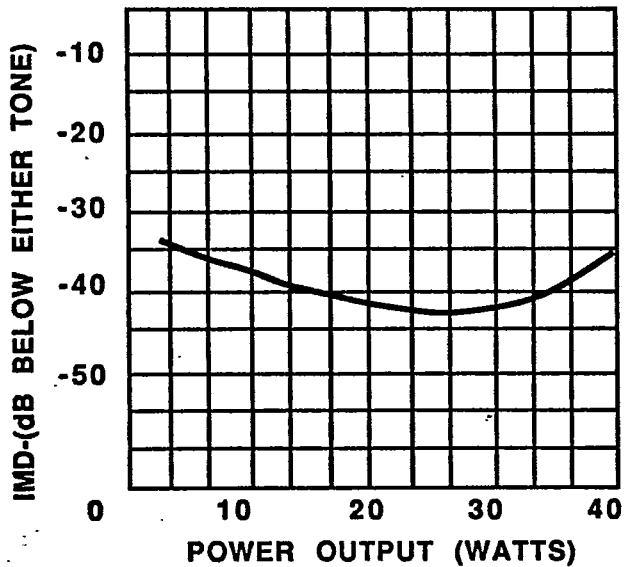

**DC SAFE OPERATING AREA (TYPICAL)**

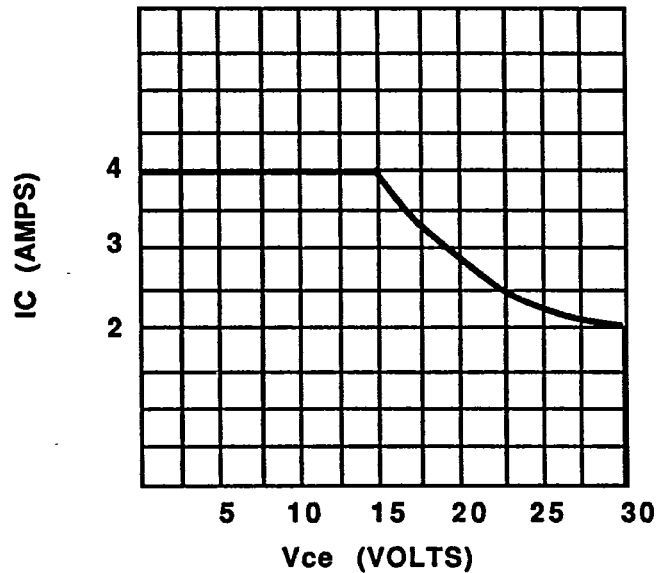

SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE

118