

### POWER FACTOR CONTROLLER



The KA7524 provides the necessary features to implement the Electronic BALLAST control and S.M.P.S application for designing on active power factor correction circuit.

### FEATURES

- Internal self-starting
- Micro power start up mode
- Included under voltage lockout circuit
- Internal 1% reference
- High output current : Peak 500mA

### CONNECTION DIAGRAM


KA7524/KA7524D (8 DIP, 8 SOP)

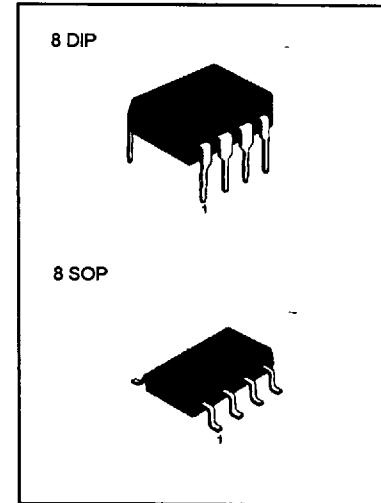

### ORDERING INFORMATION

Device	Ref. Voltage	Package	Operating Temperature
KA7524	1%	8 DIP	-25 ~ + 100°C
KA7524D	1%	8 SOP	-25 ~ + 100°C

### BLOCK DIAGRAM

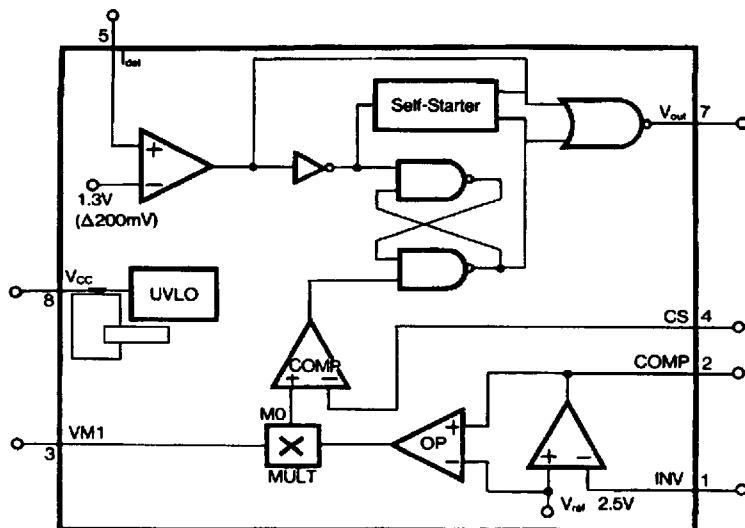

**ABSOLUTE MAXIMUM RATINGS**

Characteristic	Symbol	Value	Unit
Supply Voltage	$V_{CC}$	20	V
Peak driver output current	$I_{OP(P)}$	500	mA
Detect clamping diode current	$I_{DET}$	10	mA
Output clamping diode current	$I_{O(C.D.)}$	10	mA
Operating ambient temperature	$T_{OPR}$	-25 ~ + 100	°C
Storage Temperature	$T_{STG}$	-65 ~ + 150	°C

**ELECTRICAL CHARACTERISTICS**

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>Under Voltage Lockout Section</b>						
Start Threshold Voltage	$V_{TH(ST)}$		9.2	10	10.8	V
UV Lockout Hysteresis	$V_{THS}$		1.8	2.0	2.2	V
Supply Zener Voltage	$V_Z$			17		V
<b>Supply Current Section</b>						
Start-Up Supply Current	$I_{START}$	$V_{CC} < V_{TH}$		0.25	0.5	mA
Operating Supply Current	$I_{CC}$	$V_{CC} = 12V$ , No Load		6	12	mA
Dynamic Operating Current	$I_{CC(D)}$	$V_{CC} = 12V$ , $f = 50KHz$ , $C_{GS} = 1000PF$		10	20	mA
<b>Reference Section(Note1)</b>						
Reference Voltage	$V_{REF}$	KA7524/D	2.475	2.5	2.525	V
Line regulation	$V_{REF}$	$12V < V_{CC} < 16V$		0.1	10	mV
Load Regulation	$V_{REF}$	$0 < I_{REF} < 2mA$		0.1	10	mV
Temperature Stability	$ST_T$			20		mV
<b>Error Amplifier Section</b>						
Input Offset Voltage	$V_{IO}$		-15		15	mV
Input Bias Current	$I_{BIAS}$		-1	-0.1	1	uA
Large Signal Open Loop Gain	$G_V$		60	100		dB
Power Supply Rejection Ratio	$PSRR$		60	86		dB
Output Current	$I_{SOURCE}$		2			mA
	$I_{SINK}$				-2	mA
Output Voltage Range	$V_{O(P)}$		1.2		4	V
Unity Gain Bandwidth	$UBW$			1.0		MHz
Phase Margin	$MPH$			57		°C


**ELCTRICAL CHARACTERISTICS(Continude)**

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>Multipiller Section</b>						
M1 Input Voltage Range	$V_{I(M1)}$		0		2	V
M2 Input Voltage Range	$V_{I(M2)}$		$V_{REF}$		$V_{REF+1}$	V
Input Bias Current	$I_{BIAS}$		-2	-0.5	2	uA
Multipiller Gain (Note2)	$G_V$	$V_{I(M1)} = 0.5V, V_{I(M2)} = 3V$		0.8		uA
Multipiller Gain Stability	$ST_T$			-0.2		%/°C
<b>Current Sdnce Section</b>						
Input Offset Voltage	$V_{IO}$		-10		10	mV
Input Bias Current	$I_{BIAS}$	$0V < V_{CS} < 1.7V$	-5		5	uA
C. Sense Delay to Output	$t_{DXS}$	Error Amp Output = 3.7V		200	500	nS
<b>Current Detect Section</b>						
Input Voltage Threshold	$V_{TH}$		1.0	1.3	1.6	V
Hysteresis	$V_{THS}$			200		mV
Input Low Clamp Voltage	$V_{IC(L)}$	$I_{DET} = 0mA$			0.95	V
Input High Clamp Voltage	$V_{IC(H)}$	$I_{DET} = 3mA$	6.1	7.1		V
Input Current	$I_J$	$0.9 < V_{DET} < 6V$		5		uA
Input Clamp Diode Current	$I_{CD}$	$V_{DET} < 0.9V, V_{DET} > 6V$			3	mA
<b>Self-Starting Section</b>						
Self-Starting Time	$t_{SS}$		12			uS

Note 1. Reference can not be tested on the PKG

2.  $G_V = V_{O(H)} / (V_{I(M1)} * V_{I(M2)} - V_{REF})$


## KA7524 APPLICATION CIRCUIT

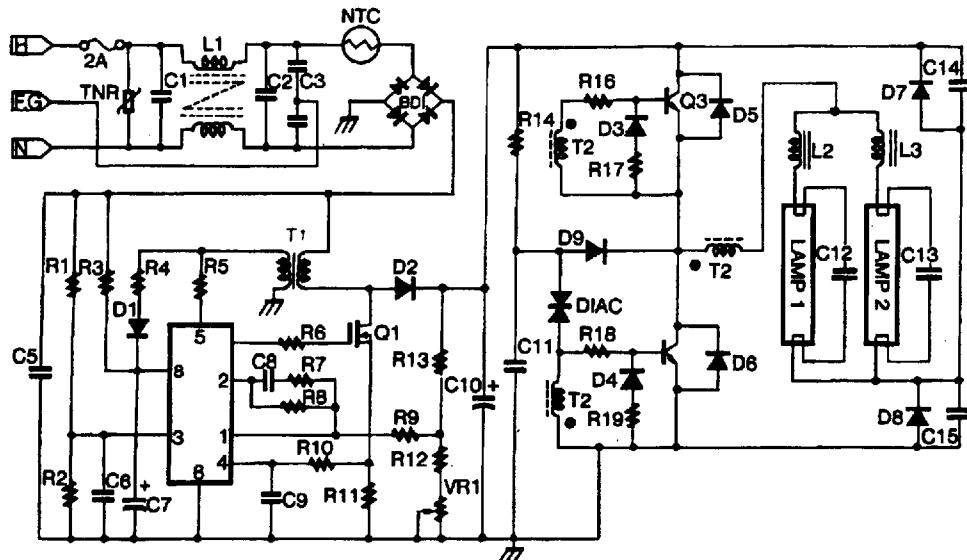

## PART LIST


Resistor	Capacitor	Semiconductor		
R1 1.8M	C1 0.1uF	IC1 KA7524		
R2 10K	C2 0.1uF	Q1 IRF830		
R3 100K	C3 4700pF	Q2 KSC5039		
R4 3.3ohm	C4 4700pF	Q3 KSC5039		
R5 22K	C5 0.1uF	D1 1N4004		
R6 27ohm	C6 0.01uF	D2 1N4937		
R7 2.2K	C7 100uF	D3 1N4148		
R8 2.2M	C8 0.1uF	D4 1N4148		
R9 150K	C9 3300pF	D5 FR107		
R10 330ohm	C10 47uF/450V	D6 FR107		
R11 0.75ohm	C11 0.1uF	D7 FR107		
R12 5.1K	C12 3300pF	D8 FR107		
R13 1M	C13 3300pF	BD1 PBP204		
R14 390K	C14 0.01uF	TNR 12G471		
R15 3.9M	C15 0.01uF	DIAC 32V		
R16 5.1ohm				
R17 27ohm				
R18 5.1ohm				
R19 27ohm				
VR1 5K				
NTC 10ohm				
Magnetics				
T1 EI-25 (PC30): P = 70T, S = 4T, Gap = 0.5mm				
T2 D15 (GP-5): P = 3T, S = 13T				
L1 EE-25 (Iron Power) 80mH				
L2, L3 EI-25 (PC30): 150T, Gap = 0.4mm				

Dimensions in Millimeters

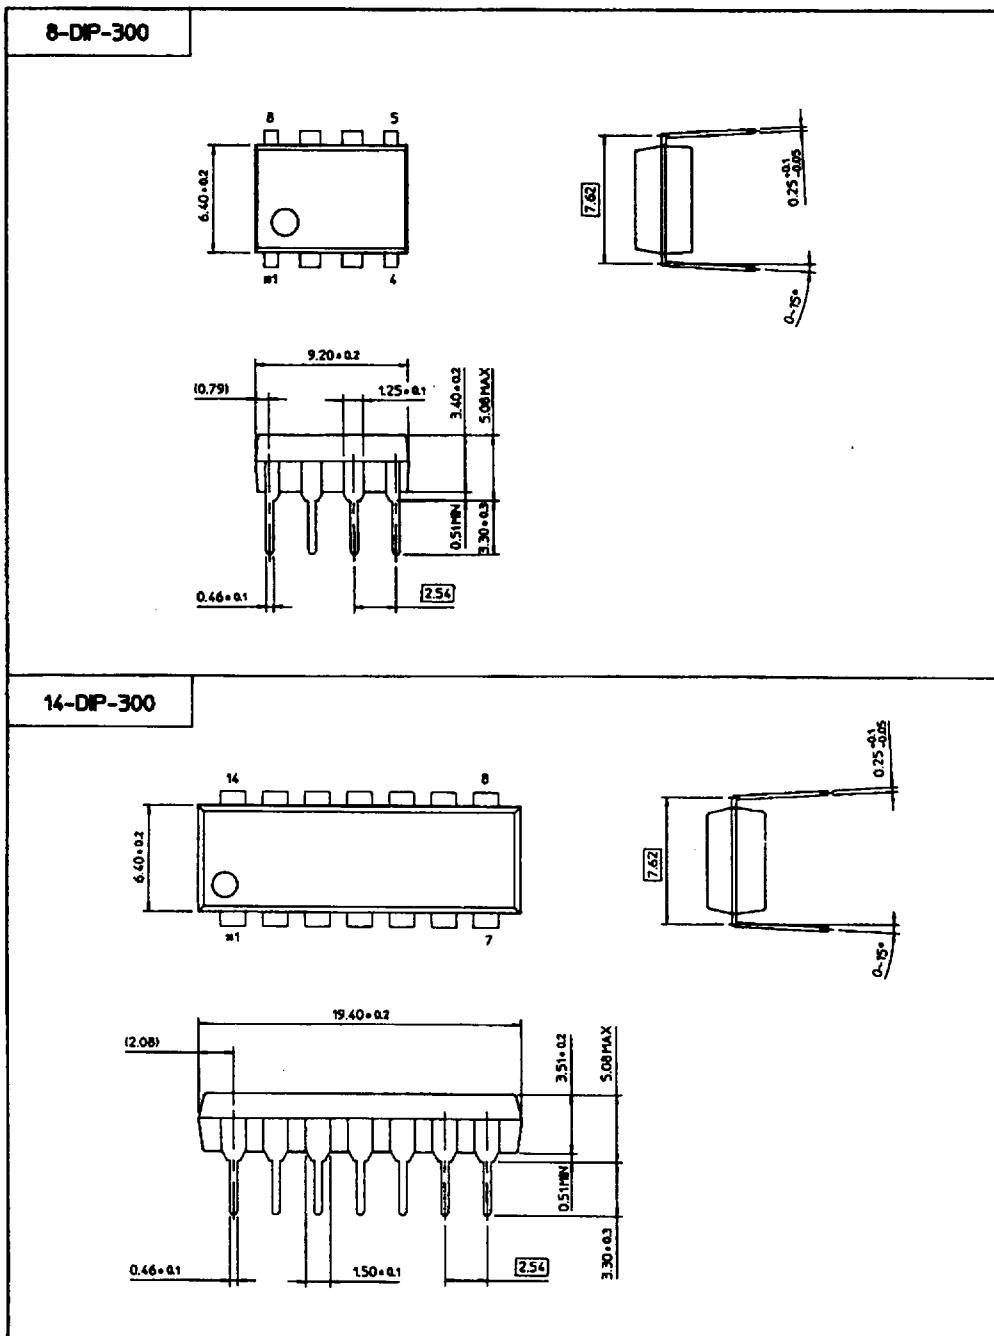


Dimensions in Millimeters/Inches

8-SOP-225

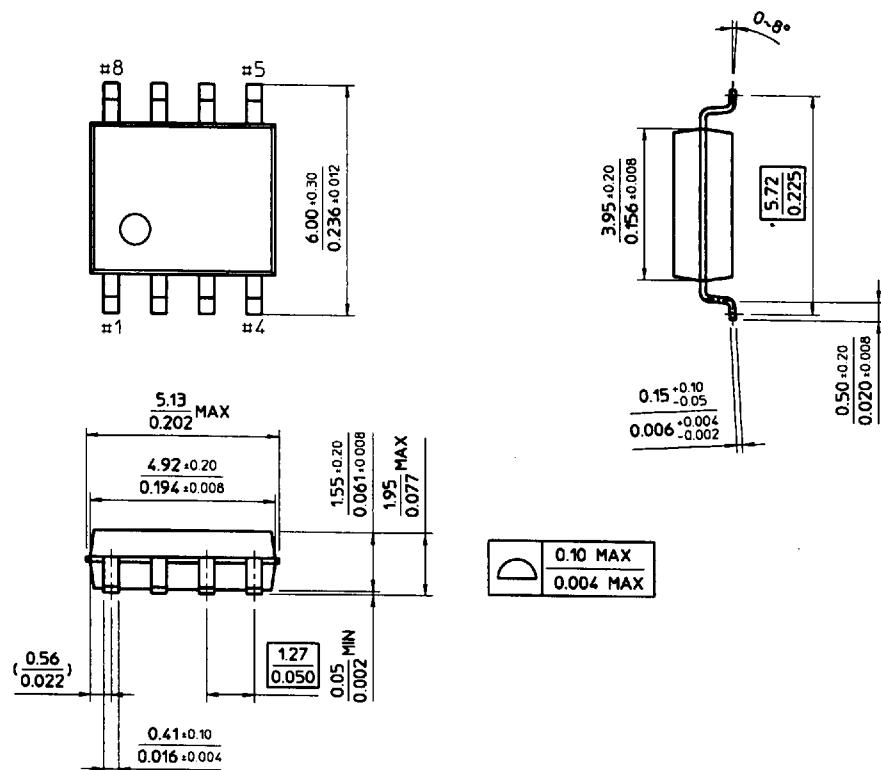

14-SOP-225B

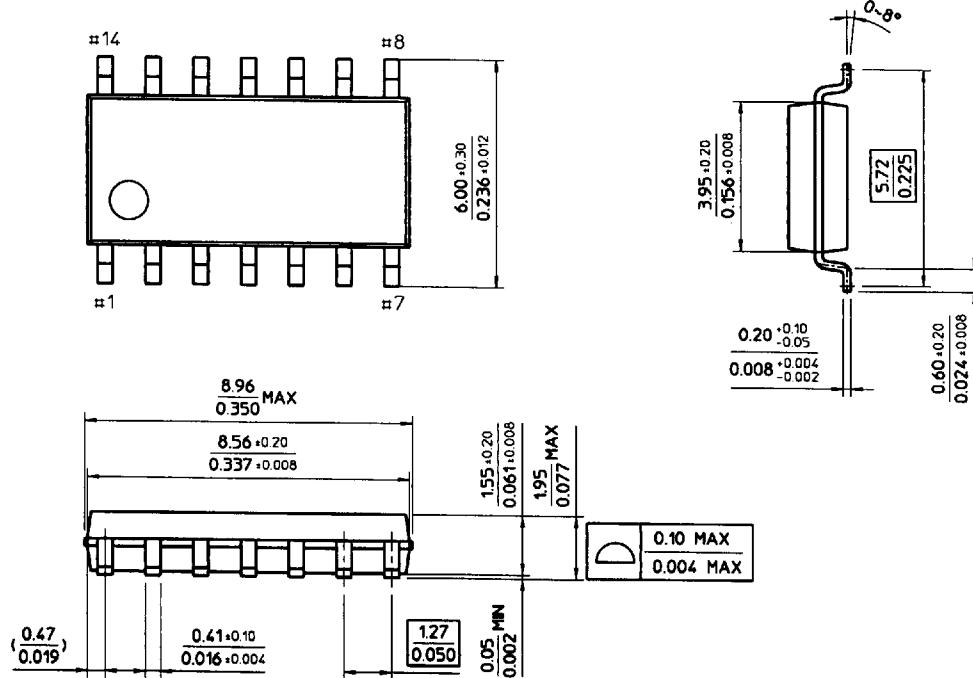

■ 7964142 0036230 830 ■

49

SAMSUNG  
ELECTRONICS