
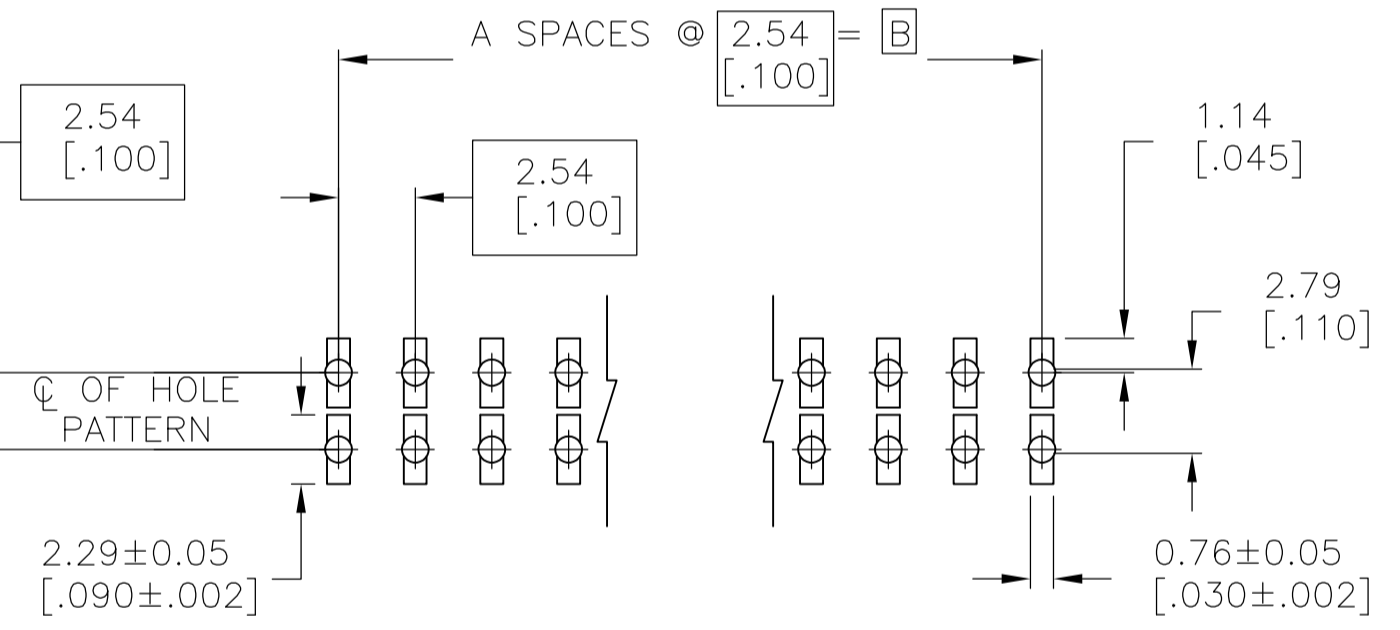


REV	DESCRIPTION	DATE	BY	CHK
B	EC 063C 0084 05	21MAR05	BSV	JLG
B1	REVISED PER ECO-09-021510	12SEP09	KK	AEG

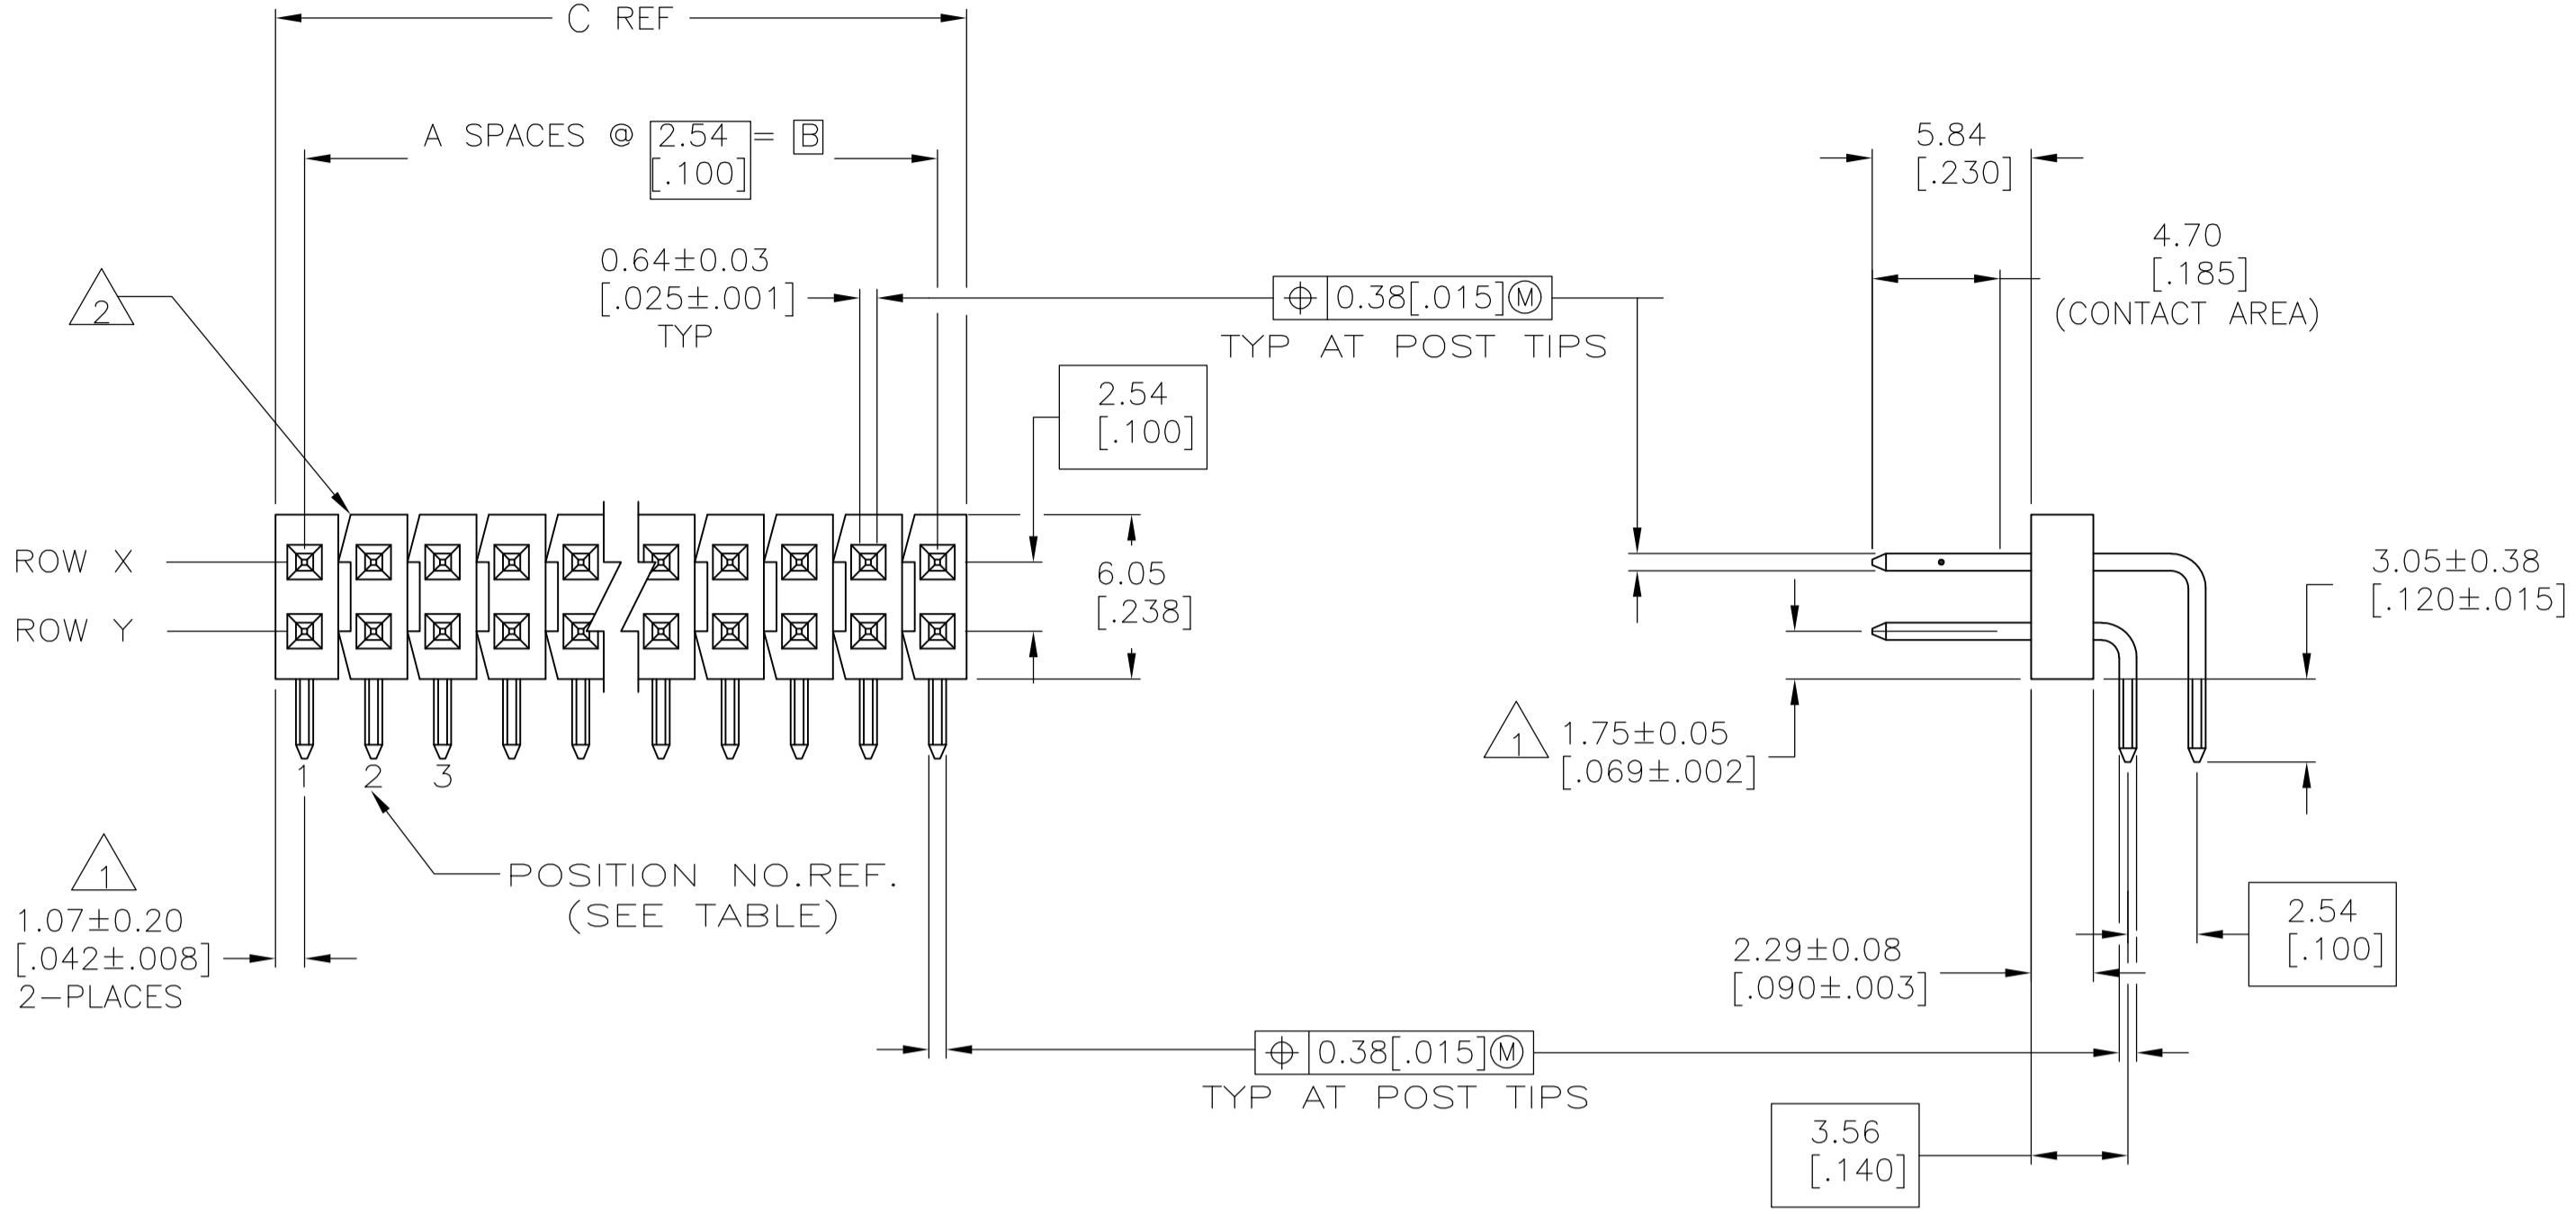

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 GLASS FILLED THERMOPLASTIC (THAT WILL WITHSTAND IR REFLOW PROCESSING) COLOR: BLACK.
- 4 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ALL OVER 0.00127 [.000050] NICKEL.
- 5 PARTS PACKAGED IN TUBES.
- 6 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ALL OVER 0.00127 [.000050] NICKEL.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	OBSOLETE	6	101.19 [3.984]	99.06 [3.900]	39	80	9-146308-0	7	4	PLATING					PART NUMBER
										C	B	A	NO. OF POSITIONS	PART NUMBER	
			75.79 [2.984]	73.66 [2.900]	29	60	4-146308-1								
			101.19 [3.984]	99.06 [3.900]	39	80	4-146308-0								
			98.65 [3.884]	96.52 [3.800]	38	78	8-146308-9								
			96.11 [3.784]	93.98 [3.700]	37	76	8-146308-8								
			93.57 [3.684]	91.44 [3.600]	36	74	8-146308-7								
			91.03 [3.584]	88.90 [3.500]	35	72	8-146308-6								
			88.49 [3.484]	86.36 [3.400]	34	70	8-146308-5								
			85.95 [3.384]	83.82 [3.300]	33	68	8-146308-4								
			83.41 [3.284]	81.28 [3.200]	32	66	8-146308-3								
			80.87 [3.184]	78.74 [3.100]	31	64	8-146308-2								
			78.33 [3.084]	76.20 [3.000]	30	62	8-146308-1								
			75.79 [2.984]	73.66 [2.900]	29	60	8-146308-0								
			73.25 [2.884]	71.12 [2.800]	28	58	7-146308-9								
			70.71 [2.784]	68.58 [2.700]	27	56	7-146308-8								
			68.17 [2.684]	66.04 [2.600]	26	54	7-146308-7								
			65.63 [2.584]	63.5 [2.500]	25	52	7-146308-6								
			63.09 [2.484]	60.96 [2.400]	24	50	7-146308-5								
			60.55 [2.384]	58.42 [2.300]	23	48	7-146308-4								
			58.01 [2.284]	55.88 [2.200]	22	46	7-146308-3								
			55.47 [2.184]	53.34 [2.100]	21	44	7-146308-2								
			52.93 [2.084]	50.80 [2.000]	20	42	7-146308-1								
			50.39 [1.984]	48.26 [1.900]	19	40	7-146308-0								
			47.85 [1.884]	45.72 [1.800]	18	38	6-146308-9								
			45.31 [1.784]	43.18 [1.700]	17	36	6-146308-8								
			42.77 [1.684]	40.64 [1.600]	16	34	6-146308-7								
			40.23 [1.584]	38.10 [1.500]	15	32	6-146308-6								
			37.69 [1.484]	35.56 [1.400]	14	30	6-146308-5								
			35.15 [1.384]	33.02 [1.300]	13	28	6-146308-4								
			32.61 [1.284]	30.48 [1.200]	12	26	6-146308-3								
			30.07 [1.184]	27.94 [1.100]	11	24	6-146308-2								
			27.53 [1.084]	25.40 [1.000]	10	22	6-146308-1								
			24.99 [.984]	22.86 [.900]	9	20	6-146308-0								
			22.45 [.884]	20.32 [.800]	8	18	5-146308-9								
			19.91 [.784]	17.78 [.700]	7	16	5-146308-8								
			17.37 [.684]	15.24 [.600]	6	14	5-146308-7								
			14.83 [.584]	12.70 [.500]	5	12	5-146308-6								
			12.29 [.484]	10.16 [.400]	4	10	5-146308-5								
			9.75 [.384]	7.62 [.300]	3	8	5-146308-4								
			7.21 [.284]	5.08 [.200]	2	6	5-146308-3								
			4.67 [.184]	2.54 [.100]	1	4	5-146308-2								
			- [-]	- [-]	0	2	5-146308-1								

THIS DRAWING IS A CONTROLLED DOCUMENT.				DIN T. HOFFMAN 07JUN95		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm (INCHES)				TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVALS: G. DUBNICZKI 07JUN95	
0. PLC ± -				1. PLC ± .05		NAME: G. DUBNICZKI	
2. PLC ± 0.12 [.005]				3. PLC ± 0.127 [.005]		PRODUCT SPEC	
4. PLC ± 0.0127 [.0005]				ANGLES ± -		APPLICATION SPEC	
MATERIAL: 3				FINISH: SEE TABLE		WEIGHT: -	
CUSTOMER DRAWING				SCALE: 4:1		SHEET 1 OF 1 REV B1	