


PIN HEADER „SMD“

ID: 335







STL 2-XXXXP / STL 2-XXXXPA

Series 400

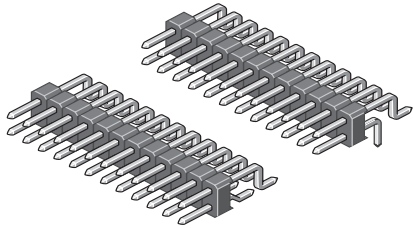

TECHNICAL DATA

Pitch	2,54 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	copper alloy
Rated Current	3 Amp.
Rated Voltage	250 V _{AC/DC}
Withstanding Voltage	1000 V _{AC} for one minute
Operating Temperature	-40°C to +105°C
Maximum Soldering Temperature	260°C for 10 seconds



Code	B
0305	3,05
0584	5,84
0813	8,13
1067	10,67

All dimensions in mm.
Other dimensions upon request.

STL 2 - XXXX XX XX - 178 - XX P C TR U

- 2: 2 rows
- Code: see table
- Type: P = parallel SMD
PA = 1-row SMD/1-row right angled
- Plating: TT = Sn
GT = Sel. Au
GG = Au
- U: RoHS-compliant with high temp. plastic
- TR: Tape&Reel packing
- C: Cap
- P: Pos. Pin
- Pins: 4 - 80 poles possible
- 178: distance Pin-PCB 1,78mm