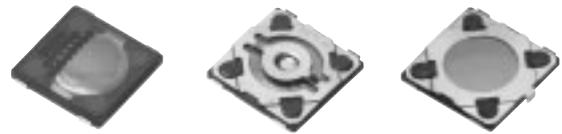


4 mm Square SMD Light Touch Switches

Type: **EVQP6/EVQ6P6/EVQ7P6/EVQ9P6**



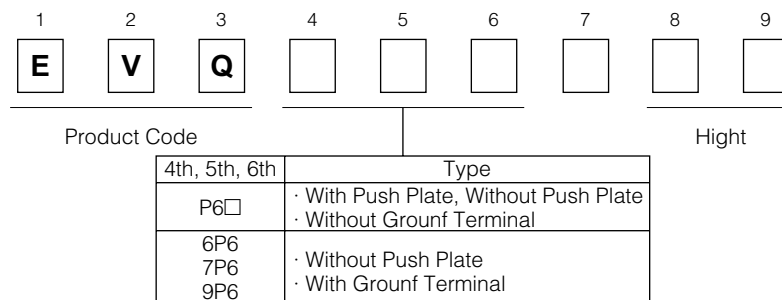
■ Features

- External dimensions : 4.1 mm×4.1 mm
Height :Without Push Plate 0.35 mm, With Push Plate 0.58 mm
:Without Push Plate-With Ground Terminal 0.43 mm
- Long-life :1000000 cycles min.
(Operating Force 1.6 N Type)
- Dust-proof structure

■ Recommended Applications

- Operating switches for portable electronic equipment
(Mobile phones, Camcorders, Portable audio players, etc.).

■ Explanation of Part Numbers



■ Product Chart

Height Packaging Operating Force	Without Push Plate H=0.35 mm	With Push Plate H=0.58 mm	Without Push Plate With Ground Terminal H=0.43 mm
	Embossed	Embossed	Embossed
1.0 N	—	—	EVQ7P6
1.6 N	EVQP6D	EVQP6L	EVQ6P6
2.4 N	EVQP6P	EVQP6Y	EVQ9P6
3.5 N	EVQP6J	EVQP6W	—









■ Specifications

Type		Snap action / Push-on type SPST	
		Without Push Plate	With Push Plate
Electrical	Rating	10 μA 2 Vdc to 20 mA 15 Vdc (Resistive load)	
	Contact Resistance	100 mΩ max.	
	Insulation Resistance	50 MΩ min.	
	Dielectric Withstanding Voltage	250 Vac for 1 minute	
	Bouncing	8 ms max. (ON, OFF)	
Mechanical	Operating Force	1.0 N, 1.6 N, 2.4 N, 3.5 N	
	Travel	0.2 mm	
Endurance	Operating Life	1.0 N, 1.6 N : 1000000 cycles min. 2.4 N : 500000 cycles min. 3.5 N : 200000 cycles min.	
Operating Temperature		-20 °C to +70 °C	
Storage Temperature		-40 °C to +85 °C (Bulk) -20 °C to +60 °C (Taping)	
Minimum Quantity/Packing Unit		10000 pcs. Embossed Taping (Reel Pack)	
Quantity/Carton		50000 pcs.	

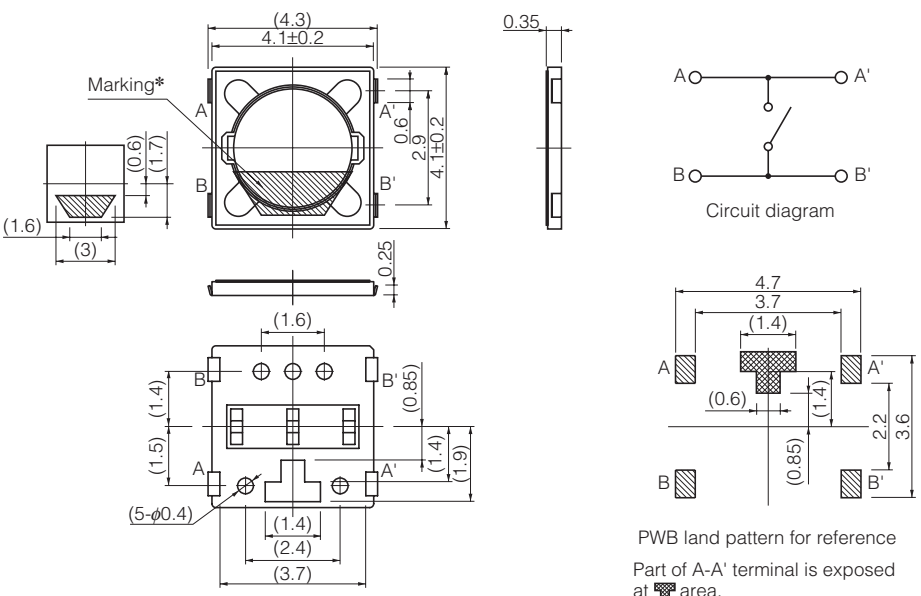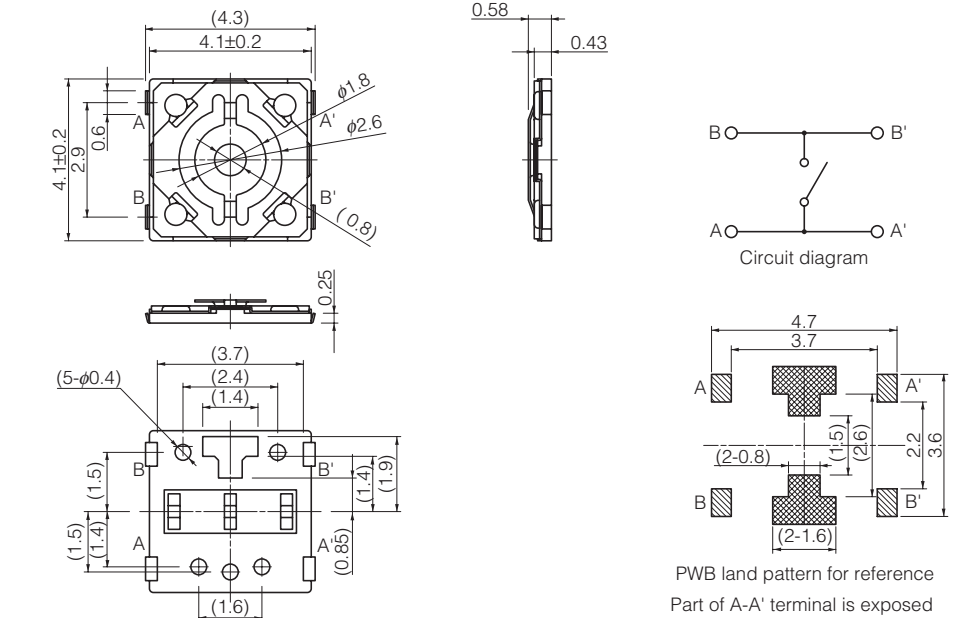
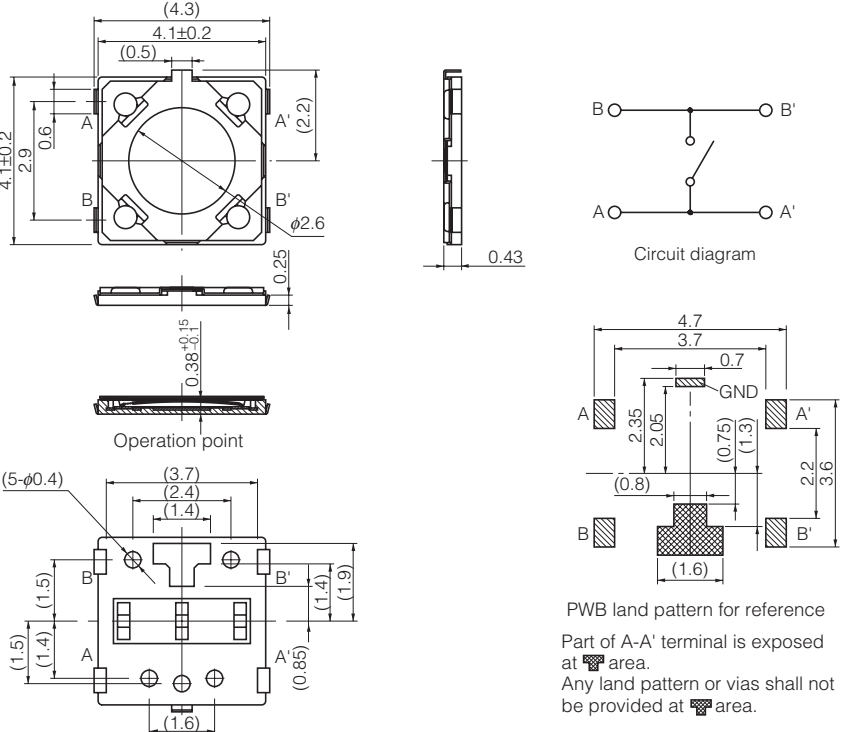


Note: Non washable

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


■ Dimensions in mm (not to scale)

<p>No. 1</p> <p>EVQP6D EVQP6P EVQP6J</p> <p>(Embossed Taping)</p> <p>Surface mount For reflow soldering Without push plate</p> 	 <p>Marking*</p> <p>Circuit diagram</p> <p>PWB land pattern for reference Part of A-A' terminal is exposed at  area. Any land pattern or vias shall not be provided at  area.</p> <p>*Marking varies according to push force.</p>																																		
<table border="1"> <thead> <tr> <th>Part Numbers</th> <th>Operating Force</th> <th>Height</th> <th>Operating Life</th> </tr> </thead> <tbody> <tr> <td>EVQP6DB35</td> <td>1.6 N</td> <td>0.35 mm</td> <td>1000000 cycles</td> </tr> <tr> <td>EVQP6PB35</td> <td>2.4 N</td> <td>0.35 mm</td> <td>500000 cycles</td> </tr> <tr> <td>EVQP6JB35</td> <td>3.5 N</td> <td>0.35 mm</td> <td>200000 cycles</td> </tr> </tbody> </table>	Part Numbers	Operating Force	Height	Operating Life	EVQP6DB35	1.6 N	0.35 mm	1000000 cycles	EVQP6PB35	2.4 N	0.35 mm	500000 cycles	EVQP6JB35	3.5 N	0.35 mm	200000 cycles	<table border="1"> <thead> <tr> <th>Part Numbers</th> <th>Operating Force</th> <th>Height</th> <th>Operating Life</th> </tr> </thead> <tbody> <tr> <td>EVQP6DB35</td> <td>1.6 N</td> <td>0.35 mm</td> <td>1000000 cycles</td> </tr> <tr> <td>EVQP6PB35</td> <td>2.4 N</td> <td>0.35 mm</td> <td>500000 cycles</td> </tr> <tr> <td>EVQP6JB35</td> <td>3.5 N</td> <td>0.35 mm</td> <td>200000 cycles</td> </tr> </tbody> </table>			Part Numbers	Operating Force	Height	Operating Life	EVQP6DB35	1.6 N	0.35 mm	1000000 cycles	EVQP6PB35	2.4 N	0.35 mm	500000 cycles	EVQP6JB35	3.5 N	0.35 mm	200000 cycles
Part Numbers	Operating Force	Height	Operating Life																																
EVQP6DB35	1.6 N	0.35 mm	1000000 cycles																																
EVQP6PB35	2.4 N	0.35 mm	500000 cycles																																
EVQP6JB35	3.5 N	0.35 mm	200000 cycles																																
Part Numbers	Operating Force	Height	Operating Life																																
EVQP6DB35	1.6 N	0.35 mm	1000000 cycles																																
EVQP6PB35	2.4 N	0.35 mm	500000 cycles																																
EVQP6JB35	3.5 N	0.35 mm	200000 cycles																																
<p>No. 2</p> <p>EVQP6L EVQP6Y EVQP6W</p> <p>(Embossed Taping)</p> <p>Surface mount For reflow soldering With push plate</p> 	 <p>Circuit diagram</p> <p>PWB land pattern for reference Part of A-A' terminal is exposed at  area. Any land pattern or vias shall not be provided at  area.</p>																																		
<table border="1"> <thead> <tr> <th>Part Numbers</th> <th>Operating Force</th> <th>Height</th> <th>Operating Life</th> </tr> </thead> <tbody> <tr> <td>EVQP6LB55</td> <td>1.6 N</td> <td>0.58 mm</td> <td>1000000 cycles</td> </tr> <tr> <td>EVQP6YB55</td> <td>2.4 N</td> <td>0.58 mm</td> <td>500000 cycles</td> </tr> <tr> <td>EVQP6WB55</td> <td>3.5 N</td> <td>0.58 mm</td> <td>200000 cycles</td> </tr> </tbody> </table>	Part Numbers	Operating Force	Height	Operating Life	EVQP6LB55	1.6 N	0.58 mm	1000000 cycles	EVQP6YB55	2.4 N	0.58 mm	500000 cycles	EVQP6WB55	3.5 N	0.58 mm	200000 cycles	<table border="1"> <thead> <tr> <th>Part Numbers</th> <th>Operating Force</th> <th>Height</th> <th>Operating Life</th> </tr> </thead> <tbody> <tr> <td>EVQP6LB55</td> <td>1.6 N</td> <td>0.58 mm</td> <td>1000000 cycles</td> </tr> <tr> <td>EVQP6YB55</td> <td>2.4 N</td> <td>0.58 mm</td> <td>500000 cycles</td> </tr> <tr> <td>EVQP6WB55</td> <td>3.5 N</td> <td>0.58 mm</td> <td>200000 cycles</td> </tr> </tbody> </table>			Part Numbers	Operating Force	Height	Operating Life	EVQP6LB55	1.6 N	0.58 mm	1000000 cycles	EVQP6YB55	2.4 N	0.58 mm	500000 cycles	EVQP6WB55	3.5 N	0.58 mm	200000 cycles
Part Numbers	Operating Force	Height	Operating Life																																
EVQP6LB55	1.6 N	0.58 mm	1000000 cycles																																
EVQP6YB55	2.4 N	0.58 mm	500000 cycles																																
EVQP6WB55	3.5 N	0.58 mm	200000 cycles																																
Part Numbers	Operating Force	Height	Operating Life																																
EVQP6LB55	1.6 N	0.58 mm	1000000 cycles																																
EVQP6YB55	2.4 N	0.58 mm	500000 cycles																																
EVQP6WB55	3.5 N	0.58 mm	200000 cycles																																


■ Dimensions in mm (not to scale)

<p>No. 3</p> <p>EVQ7P6 EVQ6P6 EVQ9P6</p> <p>(Embossed Taping)</p> <p>Surface mount For reflow soldering Without push plate With Ground Terminal</p> 	 <p>Operation point</p> <p>Circuit diagram</p> <p>PWB land pattern for reference Part of A-A' terminal is exposed at  area. Any land pattern or vias shall not be provided at  area.</p>		
Part Numbers	Operating Force	Height	Operating Life
EVQ7P6B40	1.0 N	0.43 mm	1000000 cycles
EVQ6P6B40	1.6 N	0.43 mm	1000000 cycles
EVQ9P6B40	2.4 N	0.43 mm	500000 cycles

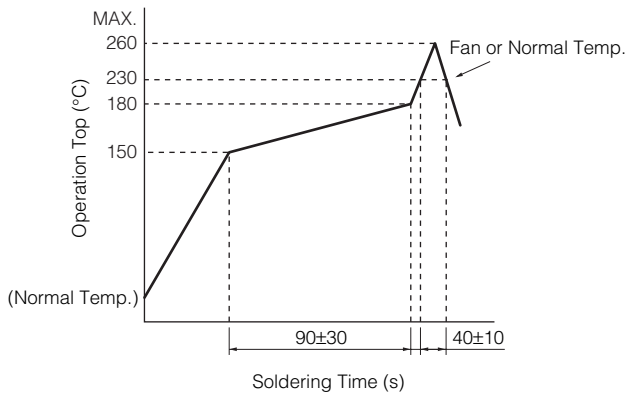■ Recommended Reflow Soldering Conditions




● Embossed Carrier Taping

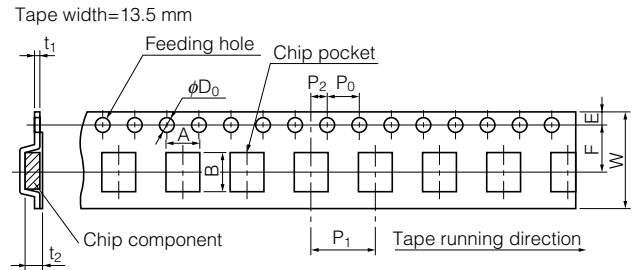

Unit: mm

Part No.	Height	A	B	W	F	E	P_1	P_2	P_0	D_0 Dia.	t_1	t_2
EVQP6	0.35/0.58	4.0±0.2	5.0±0.2	12.0 ^{+0.3} _{-0.1}	5.5±0.1	1.75±0.10	8.0±0.1	2.0±0.1	4.0±0.1	1.5 ^{+0.1} ₋₀	0.30±0.05	0.5/0.7 ^{+0.2} _{-0.1}
EVQ6P6	0.43											
EVQ7P6												
EVQ9P6												

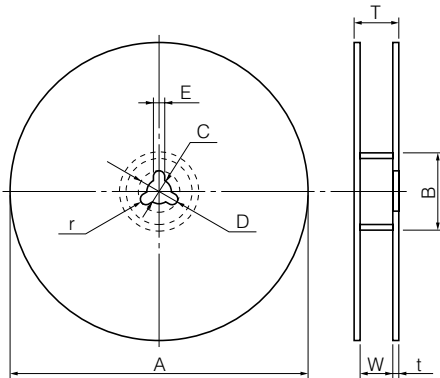
● Standard Reel Dimensions in mm (not to scale)



Item	A	B	C	D	E
Rate (mm)	$\phi 380.0 \pm 2.0$	$\phi 80.0$ min.	$\phi 13.0 \pm 0.5$	$\phi 21.0 \pm 1.0$	2.0±0.5

Item	W	T	t	r
Rate (mm)	13.5±1.5	17.5±1.0	1.0 to 3.0	1.0±0.5

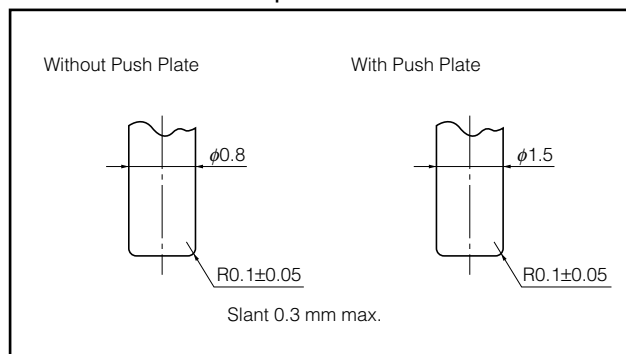■ Recommended Shape of Test Pole



■ Recommended Operating Conditions

