


**Rectifier diodes  
Schottky barrier**

**PBYL1025B series**

**FEATURES**

- Low forward volt drop
- Fast switching
- Reverse surge capability
- High thermal cycling performance
- Low thermal resistance

**SYMBOL**

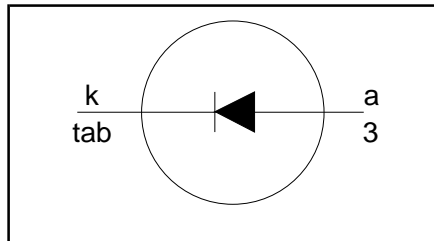

**QUICK REFERENCE DATA**

$V_R = 20\text{ V} / 25\text{ V}$
$I_{F(AV)} = 10\text{ A}$
$V_F \leq 0.4\text{ V}$

**GENERAL DESCRIPTION**


Schottky rectifier diodes intended for use as output rectifiers in low voltage, high frequency switched mode power supplies.

The PBYL1025B series is supplied in the SOT404 surface mounting package.

**PINNING**

PIN	DESCRIPTION
1	no connection
2	cathode <sup>1</sup>
3	anode
tab	cathode

**SOT404**

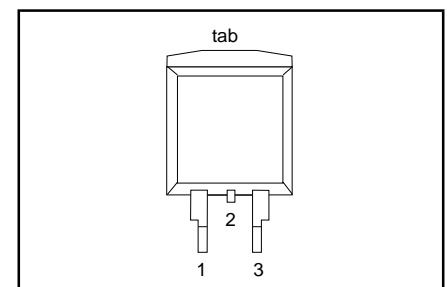

**LIMITING VALUES**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.		UNIT
				20B	25B	
$V_{RRM}$	Peak repetitive reverse voltage	<b>PBYL10</b> $T_{mb} \leq 119\text{ °C}$	-	20	25	V
$V_{RWM}$	Working peak reverse voltage		-	20	25	V
$V_R$	Continuous reverse voltage		-	20	25	V
$I_{F(AV)}$	Average rectified forward current	square wave; $\delta = 0.5$ ; $T_{mb} \leq 132\text{ °C}$	-	10		A
$I_{FRM}$	Repetitive peak forward current	square wave; $\delta = 0.5$ ; $T_{mb} \leq 132\text{ °C}$	-	20		A
$I_{FSM}$	Non-repetitive peak forward current	$t = 10\text{ ms}$	-	130		A
		$t = 8.3\text{ ms}$	-	150		A
$I_{RRM}$	Peak repetitive reverse surge current	sinusoidal; $T_j = 125\text{ °C}$ prior to surge; with reapplied $V_{RRM(max)}$ pulse width and repetition rate limited by $T_{jmax}$	-	1		A
$T_j$	Operating junction temperature		-	150		°C
$T_{stg}$	Storage temperature		- 65	175		°C

<sup>1</sup> it is not possible to make connection to pin 2 of the SOT428 package

---

 Rectifier diodes  
 Schottky barrier
 

---

PBYL1025B series

**THERMAL RESISTANCES**







SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th\ j-mb}$	Thermal resistance junction to mounting base		-	-	3	K/W
$R_{th\ j-a}$	Thermal resistance junction to ambient	pcb mounted, minimum footprint, FR4 board	-	50	-	K/W

**ELECTRICAL CHARACTERISTICS** $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_F$	Forward voltage	$I_F = 10\text{ A}; T_j = 150\text{ }^\circ\text{C}$	-	0.33	0.4	V
		$I_F = 10\text{ A}; T_j = 125\text{ }^\circ\text{C}$	-	0.39	0.45	V
		$I_F = 20\text{ A}; T_j = 125\text{ }^\circ\text{C}$	-	0.54	0.61	V
		$I_F = 20\text{ A}$	-	0.57	0.64	V
$I_R$	Reverse current	$V_R = V_{RWM}$	-	0.2	5	mA
		$V_R = V_{RWM}; T_j = 100\text{ }^\circ\text{C}$	-	15	30	mA
$C_d$	Junction capacitance	$V_R = 5\text{ V}; f = 1\text{ MHz}; T_j = 25\text{ }^\circ\text{C to } 125\text{ }^\circ\text{C}$	-	580	-	pF

Rectifier diodes  
Schottky barrier


PBYL1025B series

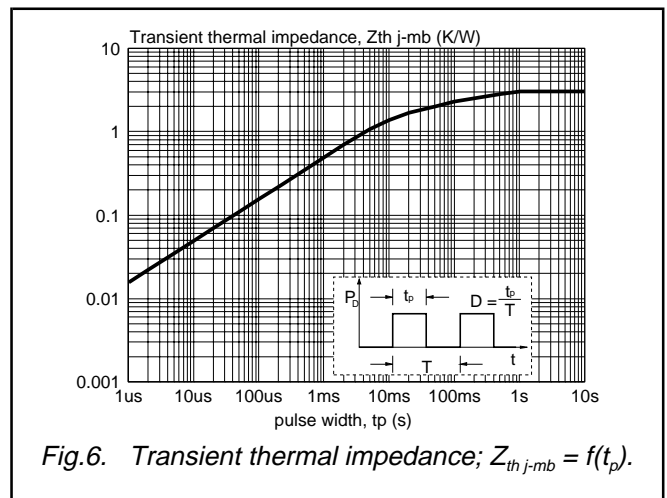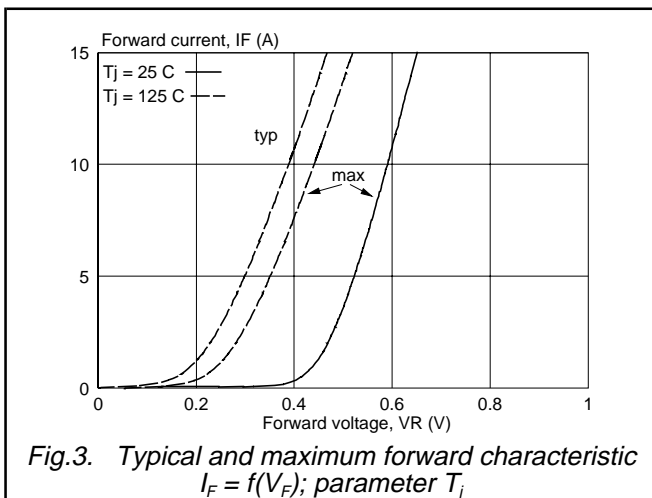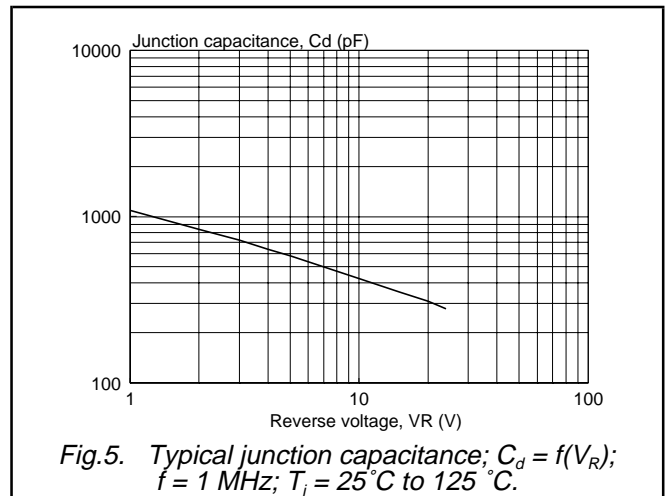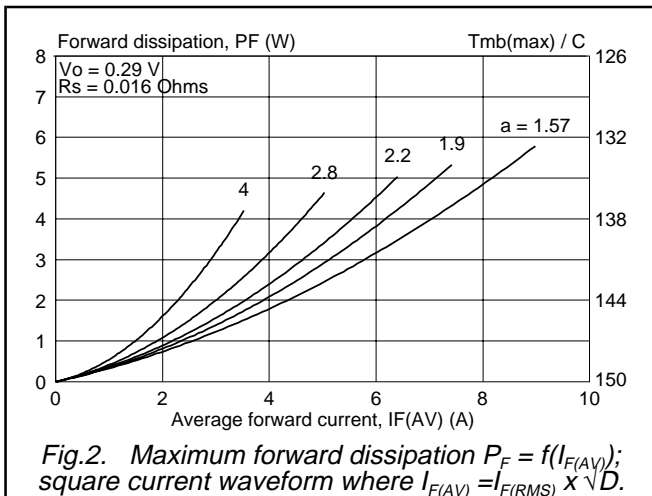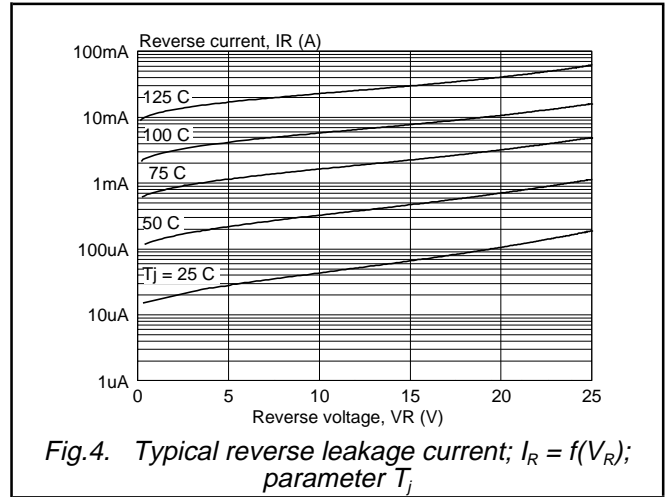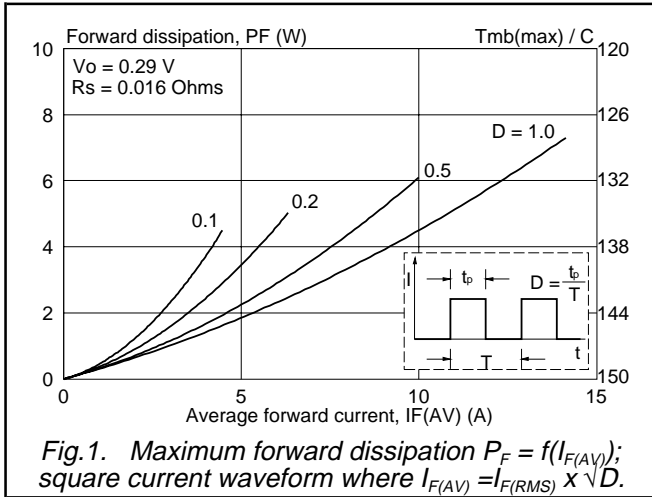


Rectifier diodes  
Schottky barrier

PBYL1025B series

**MECHANICAL DATA**

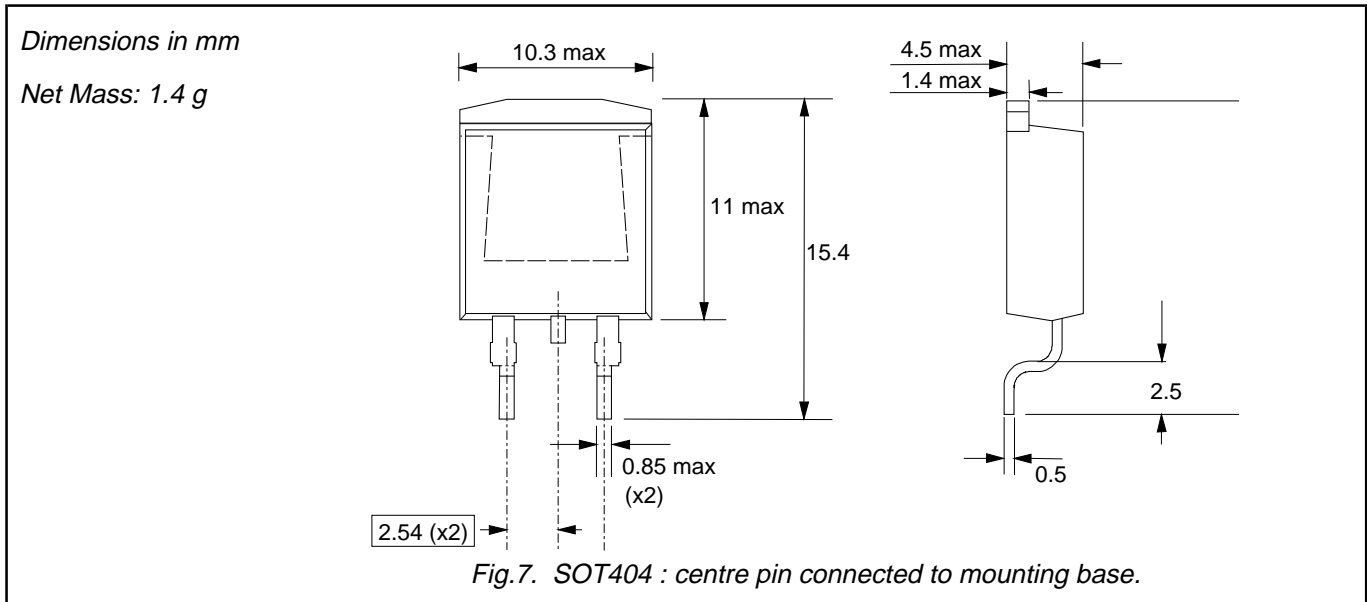

**MOUNTING INSTRUCTIONS**

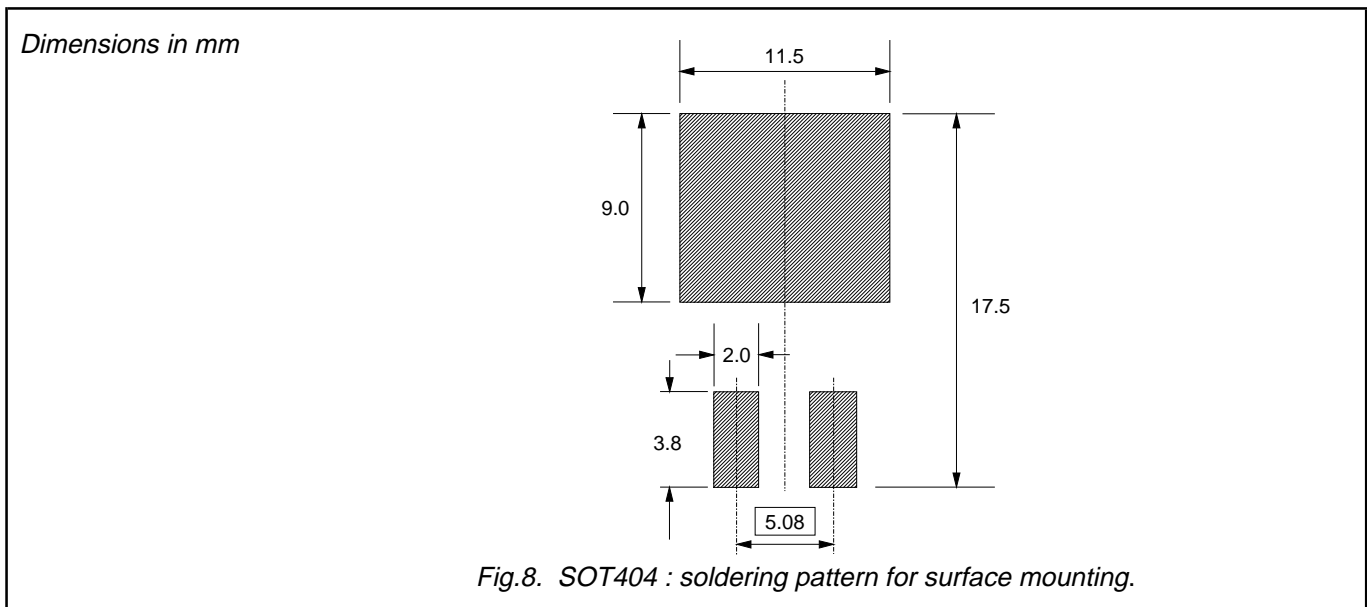

**Notes**

1. Epoxy meets UL94 V0 at 1/8".

Rectifier diodes  
Schottky barrier

PBYL1025B series

## DEFINITIONS

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	
© Philips Electronics N.V. 1998	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

## LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

Select & Go...

Information as of 2000-08-23

- Catalog by Function
- Discrete semiconductors
  - Audio
  - Clocks and Watches
  - Data communications
  - Microcontrollers
  - Peripherals
  - Standard analog
  - Video
  - Wired communications
  - Wireless communications

## PBYL1025B series; Rectifier diodes Schottky barrier

- [Description](#)
- [Features](#)
- [Datasheet](#)
- [Products, packages, availability and ordering](#)
- [Find similar products](#)

X

To be kept informed on PBYL1025B series, subscribe to eNews.

- Catalog by System
- Automotive
  - Consumer Multimedia Systems
  - Communications
  - PC/PC-peripherals
- Cross reference
- Models
- Packages
- Application notes
- Selection guides
- Other technical documentation
- End of Life information
- Datahandbook system

### Description

Schottky rectifier diodes intended for use as output rectifiers in low voltage, high frequency switched mode power supplies.

The PBYL1025B series is supplied in the SOT404 surface mounting package.

### Features

- Low forward volt drop
- Fast switching
- Reverse surge capability
- High thermal cycling performance
- Low thermal resistance

### Datasheet

- Relevant Links
- About catalog tree
  - About search
  - About this site
  - Subscribe to eNews
  - Catalog & Datasheets
  - Search
  - [PBYL1025B series](#)
  - [PBYL1025B series](#)

Type nr.	Title	Publication release date	Datasheet status	Page count	File size (kB)	Datasheet
PBYL1025B series	Rectifier diodes Schottky barrier	01-Oct-98	Product Specification	5	45	<input type="checkbox"/> <a href="#">Download</a>

### Products, packages, availability and ordering

<u>Partnumber</u>	<u>North American Partnumber</u>	<u>Order code (12nc)</u>	<u>marking/packing</u>	<u>package</u>	<u>device status</u>	<u>buy online</u>
PBYL1020B	PBYL1020B /T3	9340 547 57118	Standard Marking * Reel Pack, SMD, 13"	<a href="#">SOT404</a>	Full production	<input type="checkbox"/>
PBYL1025B	PBYL1025B /T3	9340 547 58118	Standard Marking * Reel Pack, SMD, 13"	<a href="#">SOT404</a>	Full production	<input type="checkbox"/>

**Find similar products:**



[PBYL1025B series](#) links to the similar products page containing an overview of products that are similar in function or related to the part number(s) as listed on this page. The similar products page includes products from the same catalog tree(s) , relevant selection guides and products from the same functional category.