


FEATURES

- Miniature Size
- Low Forward Voltage Drop
- Low Power Loss, High Efficiency
- High Surge Capability
- 20 Volts thru 100 Volts Types Available
- 26mm and 52mm Inside Tape Spacing Package Available

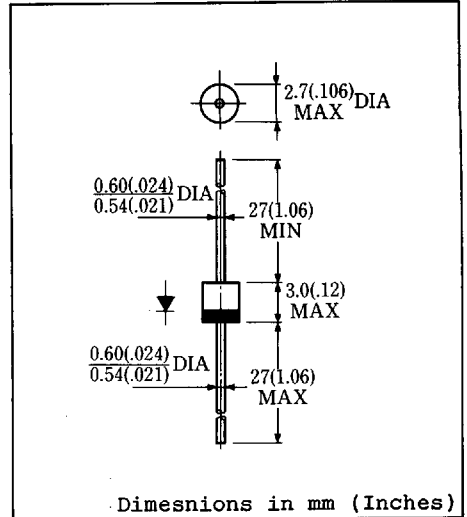

Approx. Net Weight : 0.17 Grams

MAXIMUM RATINGS

Voltage Rating	TYPE	◆ 11EQS03	11EQS04	Unit		
	Symbol					
Repetitive Peak Reverse Voltage	V_{RRM}	30	40	v		
Non-Repetitive Peak Reverse Voltage	V_{RSM}	35	45	v		
Electrical Rating	Symbol	Condition		Rating	Unit	
Average Rectified Output Current (resistive load)	I_O	P.C. Board mounted*	180° rectangular wave conduction	$T_a = 35^\circ\text{C}$	1.1	A
			180° sinusoidal wave conduction	$T_a = 46^\circ\text{C}$	1.0	
		Without Fin, PCB.	$T_a = 25^\circ\text{C}$	1.0		
RMS Forward Current	$I_F(\text{RMS})$			1.57	A	
Peak One-cycle Forward Surge Current	I_{FSM}	50Hz half sine wave, non-repetitive		40	A	
Operating Junction Temperature Range	T_{jw}			-40 to 125	$^\circ\text{C}$	
Storage Temperature Range	T_{stg}			-40 to 125	$^\circ\text{C}$	

ELECTRICAL & THERMAL CHARACTERISTICS

Characteristics	Symbol	Test Condition		Max.	Unit
Peak Forward Voltage	V_{FM}	$I_{FM} = 1\text{A}$	$T_j = 25^\circ\text{C}$	0.55	v
Peak Reverse Current	I_{RM}	$V_{RM} = V_{RRM}$	$T_j = 25^\circ\text{C}$	1.0	mA
Thermal Resistance, junction to ambient	$R_{th(j-a)}$	P.C. Board mounted*		110	$^\circ\text{C/W}$
		Without Fin or P.C. Board		140	

* P.C. Board Print Land = 5x5mm

◆ For spare parts only

FIG.1-FORWARD VOLTAGE VS. FORWARD CURRENT

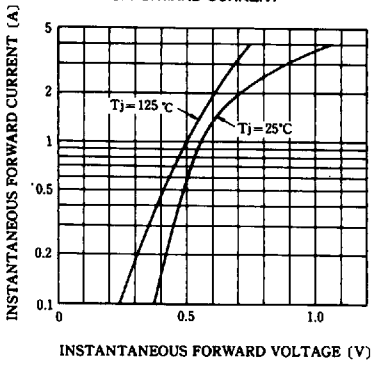


FIG.2-AVERAGE FORWARD POWER DISSIPATION

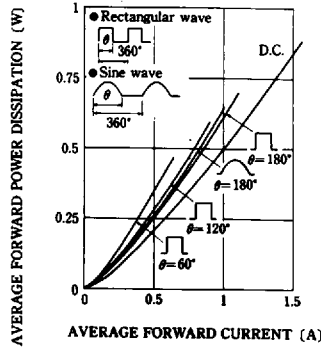


FIG.3-PEAK REVERSE CURRENT VS. PEAK REVERSE VOLTAGE

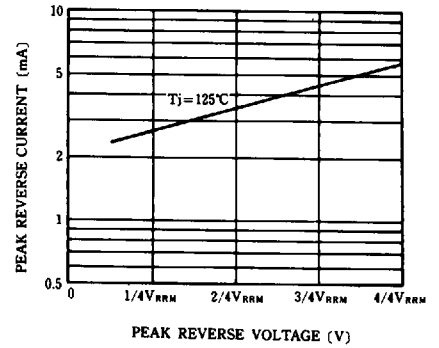


FIG.4-AVERAGE REVERSE POWER DISSIPATION (11EQS04) (11EQS03 IS FOR 75% RATED REVERSE POWER DISSIPATION)

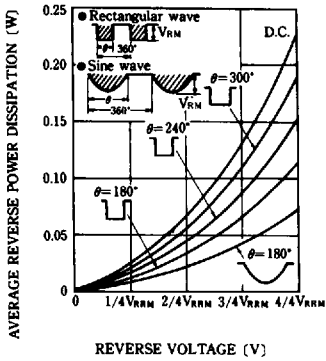


FIG.5-AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE

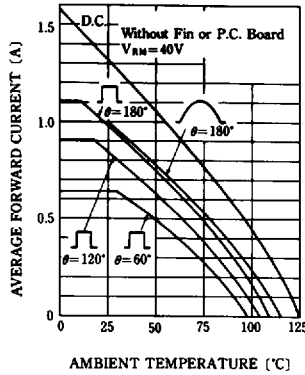


FIG.6-AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE

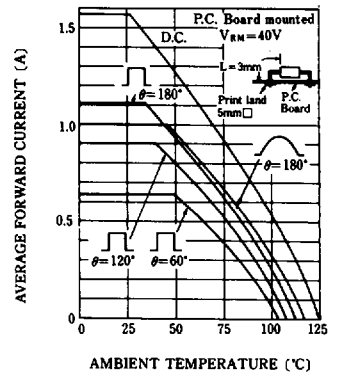


FIG.7-SURGE CURRENT RATINGS

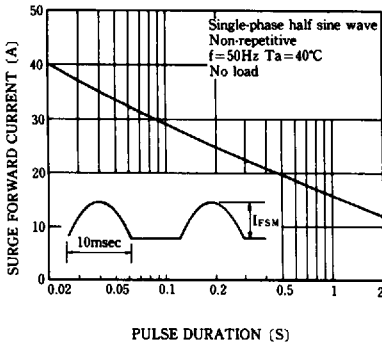


FIG.8-JUNCTION CAPACITANCE VS. REVERSE VOLTAGE

