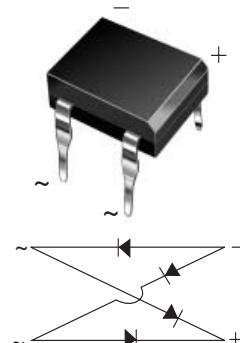


## Miniature Glass Passivated Single-Phase Bridge Rectifiers

### Major Ratings and Characteristics

$I_{F(AV)}$	1 A
$V_{RRM}$	50 V to 1000 V
$I_{FSM}$	50 A
$I_R$	5 $\mu$ A
$V_F$	1.1 V
$T_j$ max.	150 °C

**Case Style DFM**


### Features

- UL Recognition, file number E54214
- Ideal for printed circuit boards
- Applicable for automotive insertion
- High surge current capability
- Meets MSL level 1, per J-STD-020C

### Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for SMPS, Lighting Ballaster, Adapter, Battery Charger, Home Appliances, Office Equipment, and Telecommunication applications

### Mechanical Data

**Case:** DFM

Epoxy meets UL-94V-0 Flammability rating

**Terminals:** Matte tin plated (E3 Suffix) leads, solderable per J-STD-002B and MIL-STD-750, Method 2026

**Polarity:** As marked on body

### Maximum Ratings

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	DF 005M	DF 01M	DF 02M	DF 04M	DF 06M	DF 08M	DF 10M	Unit
Device Marking Code		DF005	DF01	DF02	DF04	DF06	DF08	DF10	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Max. average forward output rectified current at $T_A = 40$ °C	$I_{F(AV)}$					1.0			A
Peak forward surge current single sine-wave superimposed on rated load	$I_{FSM}$				50				A
Rating for fusing ( $t < 8.3$ ms)	$I^2t$				10				$A^2sec$
Operating junction and storage temperature range	$T_J, T_{STG}$				-55 to +150				°C

### Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Test condition	Symbol	DF 005M	DF 01M	DF 02M	DF 04M	DF 06M	DF 08M	DF 10M	Unit
Maximum instantaneous forward voltage drop per leg	at 1.0 A	$V_F$				1.1				V
Maximum reverse current at rated DC blocking voltage per leg	$T_A = 25 \text{ }^\circ\text{C}$ $T_A = 125 \text{ }^\circ\text{C}$	$I_R$				5.0	500			$\mu\text{A}$
Typical junction capacitance per leg	at 4.0 V, 1 MHz	$C_J$				25				pF

### Thermal Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	DF 005M	DF 01M	DF 02M	DF 04M	DF 06M	DF 08M	DF 10M	Unit
Typical thermal resistance per leg (1)	$R_{\theta JA}$ $R_{\theta JL}$				40	15			°C/W

Notes:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.5 x 0.5" (13 x 13 mm) copper pads

### Ratings and Characteristics Curves

( $T_A = 25 \text{ }^\circ\text{C}$  unless otherwise noted)

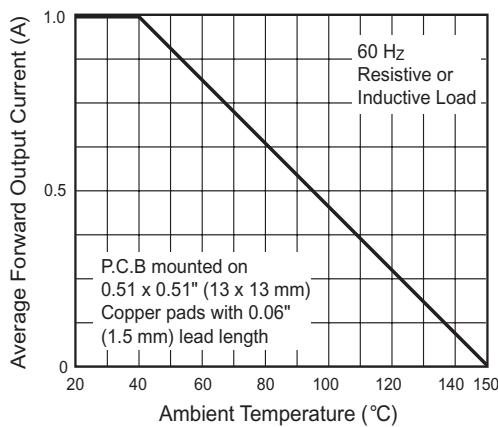


Figure 1. Derating Curve Output Rectified Current





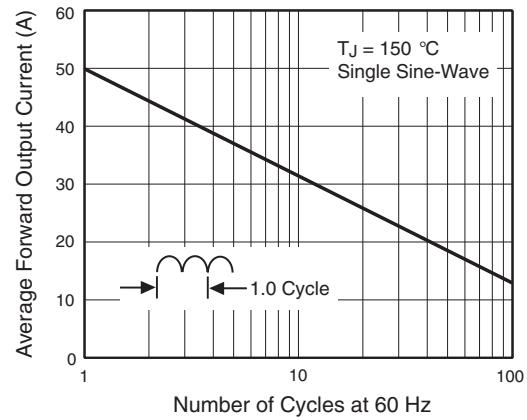


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

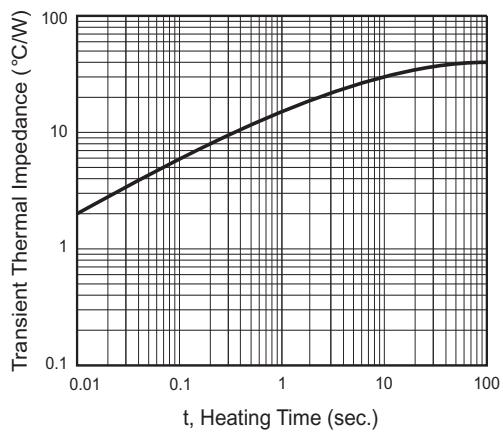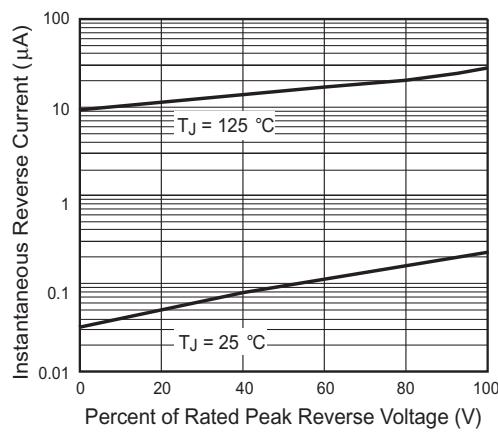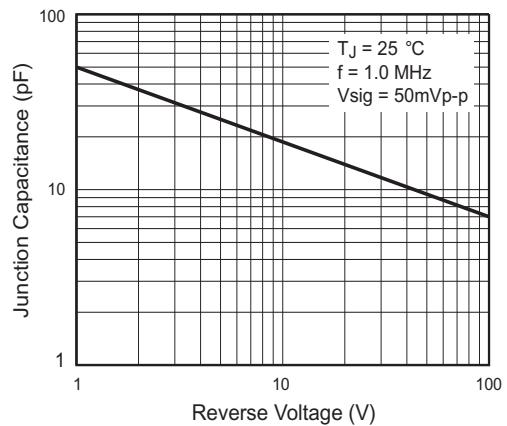

### Package outline dimensions in inches (millimeters)

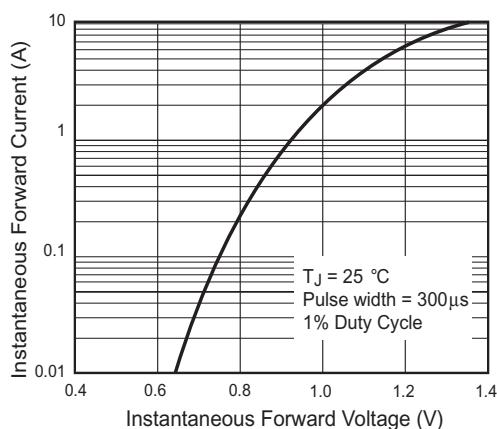