



54AC14

Hex Inverter with Schmitt Trigger Input

General Description

The 'AC14 contains six inverter gates each with a Schmitt trigger input. The 'AC14 contains six logic inverters which accept standard CMOS input signals and provide standard CMOS output levels. They are capable of transforming slowly changing input signals into sharply defined, jitter-free output signals. In addition, they have a greater noise margin than conventional inverters.


The 'AC14 has hysteresis between the positive-going and negative-going input thresholds (typically 1.0V) which is de-

termined internally by transistor ratios and is essentially insensitive to temperature and supply voltage variations.

Features

- I_{cc} reduced by 50%
- Outputs source/sink 24 mA
- Standard Military Drawing (SMD)
— 'AC14: 5962-87624

Logic Symbol

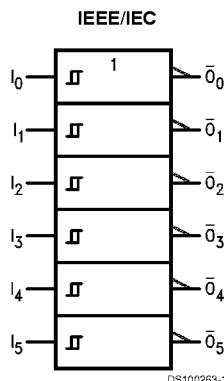


Function Table

Input	Output
A	\bar{O}
L	H
H	L

FACT™ is a trademark of Fairchild Semiconductor Corporation.


Connection Diagrams

Pin Assignment for
DIP and Flatpack

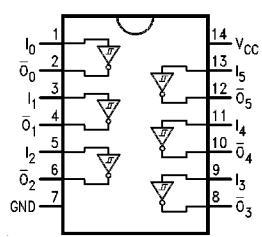

DS100263-2

Pin Assignment for LCC

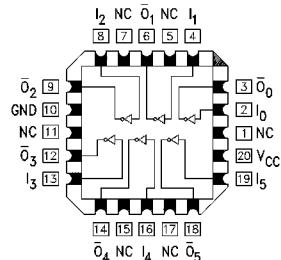

DS100263-3

Pin Names	Description
I_n	Inputs
\bar{O}_n	Outputs

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V_{CC})	-0.5V to +7.0V
DC Input Diode Current (I_{IK})	
$V_I = -0.5V$	-20 mA
$V_I = V_{CC} + 0.5V$	+20 mA
DC Input Voltage (V_I)	-0.5V to $V_{CC} + 0.5V$
DC Output Diode Current (I_{OK})	
$V_O = -0.5V$	-20 mA
$V_O = V_{CC} + 0.5V$	+20 mA
DC Output Voltage (V_O)	-0.5V to $V_{CC} + 0.5V$
DC Output Source or Sink Current (I_O)	±50 mA
DC V_{CC} or Ground Current per Output Pin (I_{CC} or I_{GND})	±50 mA

Storage Temperature (T_{STG})	-65°C to +150°C
Junction Temperature (T_J)	
CDIP	175°C

Recommended Operating Conditions

Supply Voltage (V_{CC})	
'AC	2.0V to 6.0V
Input Voltage (V_I)	0V to V_{CC}
Output Voltage (V_O)	0V to V_{CC}
Operating Temperature (T_A)	
54AC	-55°C to +125°C

Note 1: Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. National does not recommend operation of FACT™ circuits outside databook specifications.

DC Characteristics for 'AC Family Devices

Symbol	Parameter	V_{CC} (V)	54AC		Units	Conditions		
			$T_A = -55^\circ C$ to $+125^\circ C$					
			Guaranteed Limits					
V_{OH}	Minimum High Level Output Voltage	3.0	2.9		V	$I_{OUT} = -50 \mu A$		
		4.5	4.4					
		5.5	5.4					
		3.0	2.4		V	(Note 2) $V_{IN} = V_{IL}$ or V_{IH}		
		4.5	3.7			-12 mA		
		5.5	4.7			$I_{OH} = 24 \text{ mA}$		
V_{OL}	Maximum Low Level Output Voltage	3.0	0.1		V	$I_{OUT} = 50 \mu A$		
		4.5	0.1					
		5.5	0.1					
		3.0	0.5		V	(Note 2) $V_{IN} = V_{IL}$ or V_{IH}		
		4.5	0.5			12 mA		
		5.5	0.5			$I_{OL} = 24 \text{ mA}$		
I_{IN}	Maximum Input Leakage Current	5.5	±1.0	μA	$V_I = V_{CC}, GND$			
V_{t+}	Maximum Positive Threshold	3.0	2.2		$T_A = \text{Worst Case}$			
		4.5	3.2					
		5.5	3.9					
V_{t-}	Minimum Negative Threshold	3.0	0.5		$T_A = \text{Worst Case}$			
		4.5	0.9					
		5.5	1.1					
$V_{h(max)}$	Maximum Hysteresis	3.0	1.2		V	$T_A = \text{Worst Case}$		
		4.5	1.4					
		5.5	1.6					
$V_{h(min)}$	Minimum Hysteresis	3.0	0.3		V	$T_A = \text{Worst Case}$		
		4.5	0.4					
		5.5	0.5					

DC Characteristics for 'AC Family Devices (Continued)

Symbol	Parameter	V _{CC} (V)	54AC	Units	Conditions
			T _A = -55°C to +125°C		
			Guaranteed Limits		
I _{OLD}	(Note 3) Minimum Dynamic Output Current	5.5	50	mA	V _{OLD} = 1.65V Max
I _{OHD}		5.5	-50	mA	V _{OHD} = 3.85V Min
I _{CC}	Maximum Quiescent Supply Current	5.5	40.0	µA	V _{IN} = V _{CC} or GND

Note 2: All outputs loaded; thresholds on input associated with output under test.

Note 3: Maximum test duration 2.0 ms, one output loaded at a time.

Note 4: I_{IN} and I_{CC} @ 3.0V are guaranteed to be less than or equal to the respective limit @ 5.5V V_{CC}.

I_{CC} for 54AC @ 25°C is identical to 74AC @ 25°C.

AC Electrical Characteristics


Symbol	Parameter	V _{CC} (V) (Note 5)	54AC	Units	Fig. No.
			T _A = -55°C to +125°C C _L = 50 pF		
			Min	Max	
t _{PLH}	Propagation Delay	3.3	1.0	16.0	ns
		5.0	1.0	12.0	
t _{PHL}	Propagation Delay	3.3	1.0	14.0	ns
		5.0	1.5	10.0	

Note 5: Voltage Range 3.3 is 3.3V ±0.3V


Voltage Range 5.0 is 5.0V ±0.5V

Capacitance

Symbol	Parameter	Typ	Units	Conditions
C _{IN}	Input Capacitance	4.5	pF	V _{CC} = OPEN
C _{PD}	Power Dissipation Capacitance	25.0	pF	V _{CC} = 5.0V





Physical Dimensions inches (millimeters) unless otherwise noted

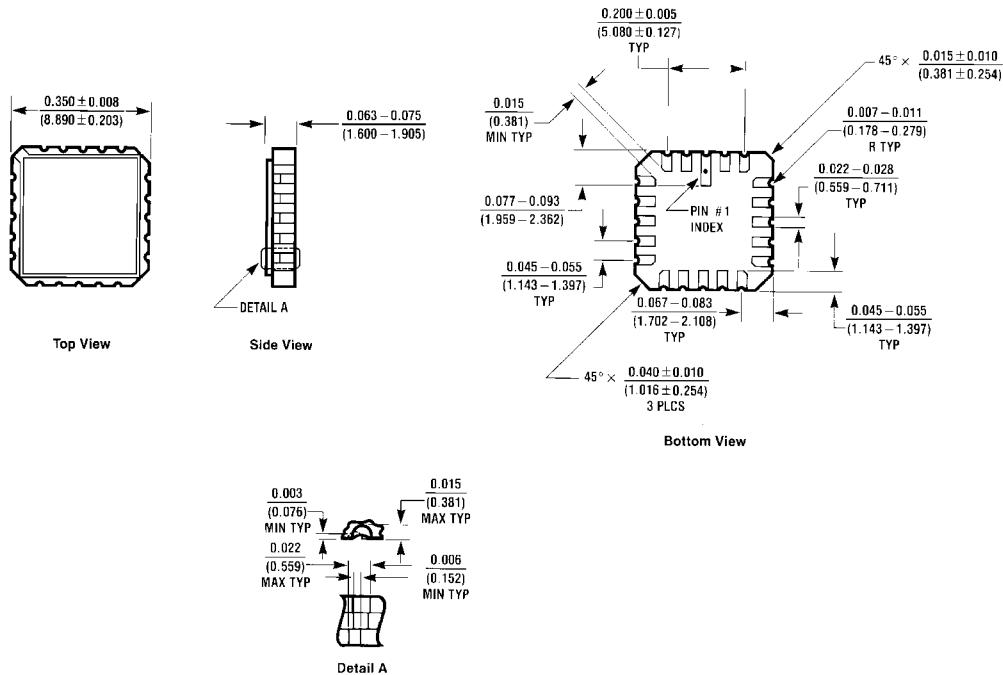

20 Terminal Ceramic Leadless Chip Carrier (L)
NS Package Number E20A


E20A (REV D)

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

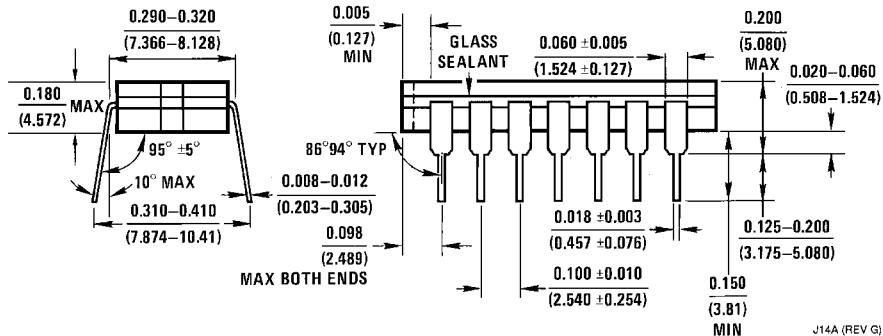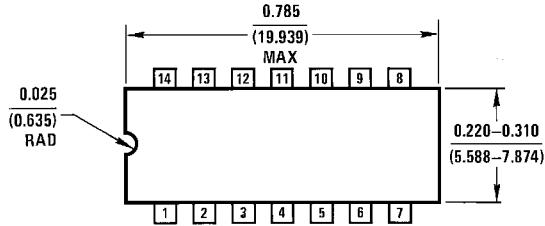

J14A (REV G)

14-Lead Ceramic Dual-In-Line Package (D)
NS Package Number J14A

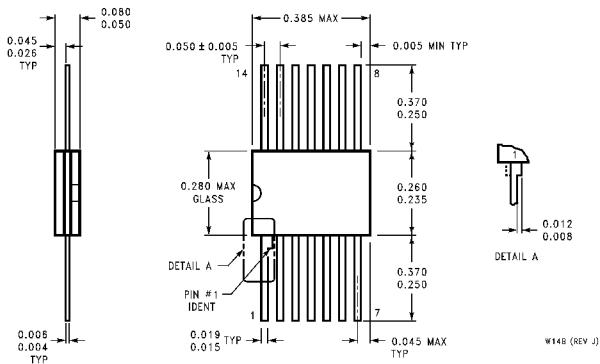

W14B (REV J)

14-Lead Ceramic Flatpak (F)
NS Package Number W14B

54AC14 Hex Inverter with Schmitt Trigger Input

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMI CONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor
Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com
www.national.com

National Semiconductor
Europe
Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 1 80-530 85 85
English Tel: +49 (0) 1 80-532 78 32
Français Tel: +49 (0) 1 80-532 93 58
Italiano Tel: +49 (0) 1 80-534 16 80

National Semiconductor
Asia Pacific Customer
Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: sea.support@nsc.com

National Semiconductor
Japan Ltd.
Tel: 81-3-5620-6175
Fax: 81-3-5620-6179