
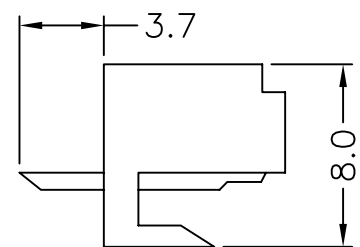


REV.	SPECIFICATION	ECN NO.	APPD.

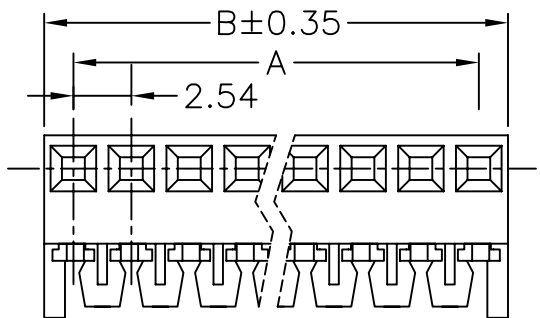

Material:

Housing: Nylon 66 UL94V-2.

Contact: Brass.

Electrical Characteristics:

Current Rating: 2.5 AMP.

Voltage Rating: 250V AC Max.


Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.


Dielectric Voltage: AC 1500V for one minute.

Operating Temperature: 0°C ~ +75°C.

***RoHS Compliant**

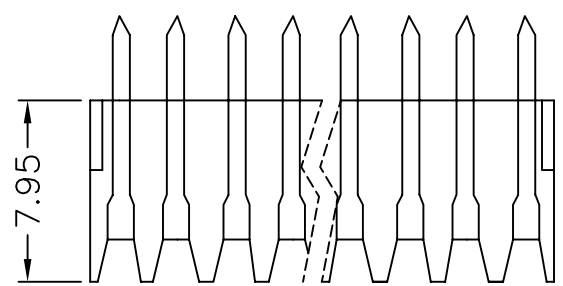

4073- Series xx Position T Tin Plated B Bottom Entry Type A Tray Package

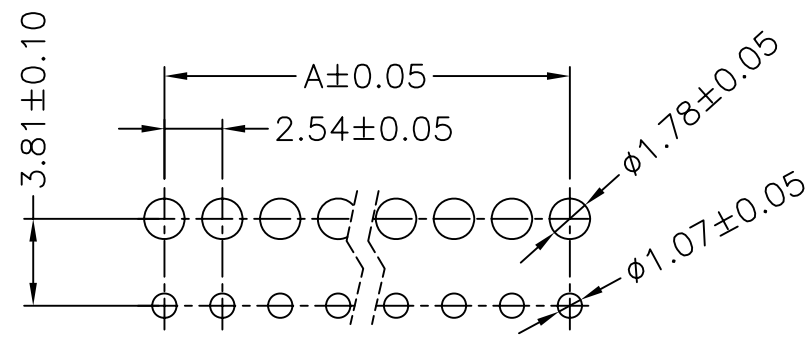

P.C.Board Layout

NO. OF Contact	Dimension		NO. OF Contact	Dimension		NO. OF Contact	Dimension		NO. OF Contact	Dimension	
	A	B		A	B		A	B		A	B
02	2.54	5.10	09	20.32	22.88	16	38.10	40.66	23	55.88	58.44
03	5.08	7.64	10	22.86	25.42	17	40.64	43.20	24	58.42	60.98
04	7.62	10.18	11	25.40	27.96	18	43.18	45.74	25	60.96	63.52
05	10.16	12.72	12	27.94	30.50	19	45.72	48.28	26	63.50	66.06
06	12.70	15.26	13	30.48	33.04	20	48.26	50.82	27	68.04	68.60
07	15.24	17.80	14	33.02	35.58	21	50.80	53.36	28	68.58	71.14
08	17.78	20.34	15	35.56	38.12	22	53.34	55.90	29	71.12	73.68

Tolerances .x = ±0.35 .xx = ±0.10	Drawn No.	4073D02003		Title: 4073 Series 2.54MM PCB CONN. BOTTOM ENTRY				 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 4073-XXTBA			
	Projection	⊕ ⊖									
	Unit	mm	Scale	1:1		SHEET	1/1	Ver.No.	A4		
	Drawn By	PEGGY09/18'09		①760							