


A-61-05-07



STRIP HEADER

Features

For additional sizes and configurations not listed, refer to pages 42 thru 45 of this catalog
Available in straight and right angle tail exits

Specifications Environmental

Temperature Range:
-55°C to +120°C


Mechanical

Insulator Material:
Glass filled polyester, black, UL94V-0
Contact Material:
Phosphor Bronze
Contact Plating:
Standard
Contact Area: 15µ IN gold
Tail Area: 150µ IN tin/lead
Optional
Contact Area: 30µ IN gold
Tail Area: 150µ IN tin/lead
Optional
10µ IN gold

Electrical

Current Rating:
1 AMP
Dielectric Withstanding Voltage:
500 Vrms
Insulation Resistance:
> 1000 Megohms

Mating CA Product:
IDS2, FID and IDS

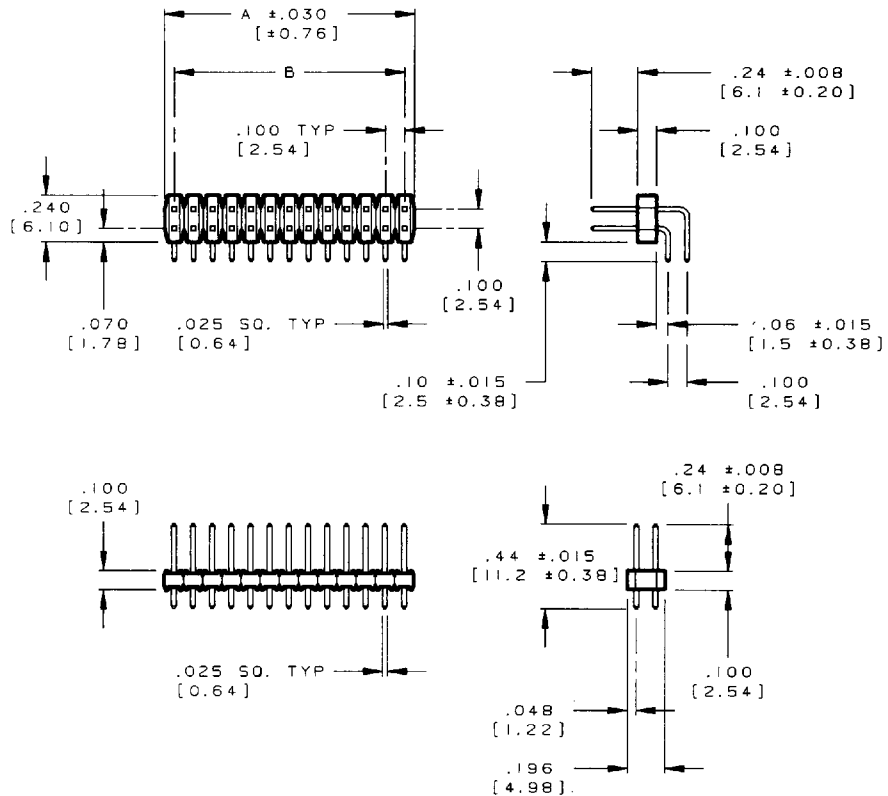

No. of Positions	Dimensions		Tail Exit	* Part Numbers		
	A	B		15µ IN sel gold	30µ IN sel gold	10µ IN gold
10	.50 [12.7]	.400 [10.16]	Straight Rt Angle	CA-D10-24C-44 CA-D10R-24C-10	CA-D10-24F-44 CA-D10R-24F-10	CA-D10-24B-44 CA-D10R-24B-10
14	.70 [17.8]	.600 [15.24]	Straight Rt Angle	CA-D14-24C-44 CA-D14R-24C-10	CA-D14-24F-44 CA-D14R-24F-10	CA-D14-24B-44 CA-D14R-24B-10
16	.80 [20.3]	.700 [17.78]	Straight Rt Angle	CA-D16-24C-44 CA-D16R-24C-10	CA-D16-24F-44 CA-D16R-24F-10	CA-D16-24B-44 CA-D16R-24B-10
20	1.00 [25.4]	.900 [22.86]	Straight Rt Angle	CA-D20-24C-44 CA-D20R-24C-10	CA-D20-24F-44 CA-D20R-24F-10	CA-D20-24B-44 CA-D20R-24B-10
26	1.30 [33.0]	1.200 [30.48]	Straight Rt Angle	CA-D26-24C-44 CA-D26R-24C-10	CA-D26-24F-44 CA-D26R-24F-10	CA-D26-24B-44 CA-D26R-24B-10
34	1.70 [43.2]	1.600 [40.64]	Straight Rt Angle	CA-D34-24C-44 CA-D34R-24C-10	CA-D34-24F-44 CA-D34R-24F-10	CA-D34-24B-44 CA-D34R-24B-10
40	2.00 [50.8]	1.900 [48.26]	Straight Rt Angle	CA-D40-24C-44 CA-D40R-24C-10	CA-D40-24F-44 CA-D40R-24F-10	CA-D40-24B-44 CA-D40R-24B-10
50	2.50 [63.5]	2.400 [60.96]	Straight Rt Angle	CA-D50-24C-44 CA-D50R-24C-10	CA-D50-24F-44 CA-D50R-24F-10	CA-D50-24B-44 CA-D50R-24B-10
60	3.00 [76.2]	2.900 [73.66]	Straight Rt Angle	CA-D60-24C-44 CA-D60R-24C-10	CA-D60-24F-44 CA-D60R-24F-10	CA-D60-24B-44 CA-D60R-24B-10
64	3.20 [81.3]	3.10 [78.74]	Straight Rt Angle	CA-D64-24C-44 CA-D64R-24C-10	CA-D64-24F-44 CA-D64R-24F-10	CA-D64-24B-44 CA-D64R-24B-10

* Replaces Part Numbers CA-DXX-23X-43, where XX = pin count and X = plating code



E9598 I



LR65050