
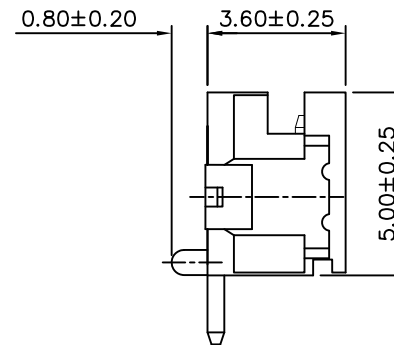


SPECIFICATIONS

Current Rating: 1A AC DC
 Voltage Rating: 100V AC DC
 Temperature Range: -25°C To +85°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 500 Megohms Min.
 Withstanding Voltage: 500V AC/Minute
 Material: Nylon 6T, UL 94V-0
 Pin Material: Brass/Gold-Plated
 Solder Tabs: Phosphor Bronze/Gold-Plated

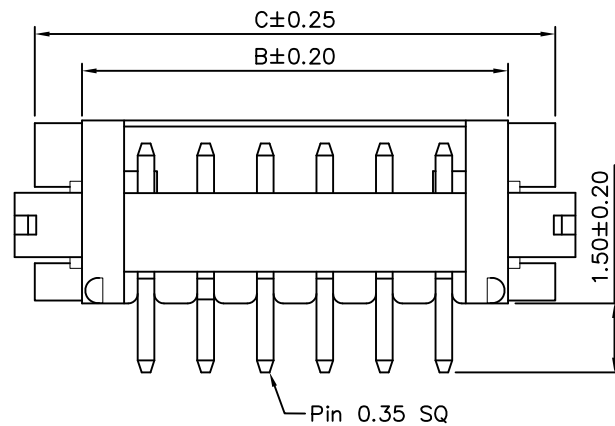

| Circuits | DIMENSIONS | | |
|----------|------------|-------|-------|
| | A | B | C |
| 2 | 1.25 | 4.15 | 6.25 |
| 3 | 2.50 | 5.40 | 7.50 |
| 4 | 3.75 | 6.65 | 8.75 |
| 5 | 5.00 | 7.90 | 10.00 |
| 6 | 6.25 | 9.15 | 11.25 |
| 7 | 7.50 | 10.40 | 12.50 |
| 8 | 8.75 | 11.65 | 13.75 |
| 9 | 10.00 | 12.90 | 15.00 |
| 10 | 11.25 | 14.15 | 16.25 |
| 11 | 12.50 | 15.40 | 17.50 |
| 12 | 13.75 | 16.65 | 18.75 |
| 13 | 15.00 | 17.90 | 20.00 |
| 14 | 16.25 | 19.15 | 21.25 |
| 15 | 17.50 | 20.40 | 22.50 |

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

| | | | | |
|--------------------------|------------|---------------------|--|--|
| CATEGORY | | APPROVED BY MEI | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. |
| PART No. DFT1XXXWG | | CHECKED BY BECKY | | |
| DRAWING No. DFT1XXXWG | | DRAWING BY TCF | | |
| SCALE NONE | REV. A1 | UNIT mm | | |

| | | | | |
|------|------|-----------------------------|--------|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A1 | | Modify DFT1XXXW-- DFT1XXXWG | INGRID | 02/19/2008 |
| △ A0 | | NEW RELEASE | BECKY | 09/24/2004 |