

# Kingbright Electronic Co., Ltd.



Mail Address: P. O. Box 81-153 Taipei, Taiwan  
 Telex No. : 22249 TWNKIN


FAX : (2) 7162041  
 Telephones : 715-2848 • 713-0682

T1 (3MM) LOGIC STATUS INDICATORS  
 LAMP

L-924CB

UNIT: MM

TOLERANCE: ±0.2

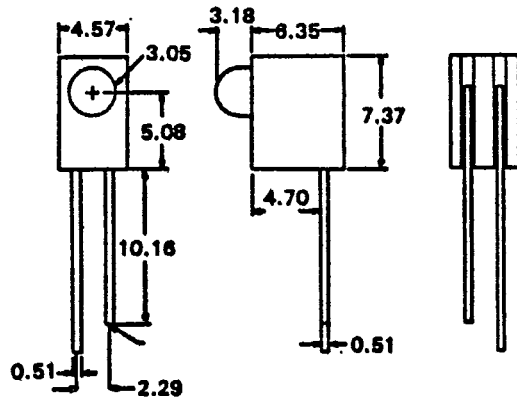

*New*

**SELECTION GUIDE**

PART NO.	SOURCE (DICE)	LENSE TYPE (RESIN)	AXIAL LUMINOUS INTENSITY IN MCD @ 20mA		VIEWING ANGLE
			MIN	TYP	
✓ L-924CB/RD	RED (GaAsP)	Red Diffused	0.5	2.0	120°
✓ L-924CB/RT		Red Transparent	1.0	6.0	120°
✓ L-924CB/HD	RED HIGH EFFICIENCY (GaP)	Red Diffused	0.5	2.2	120°
✓ L-924CB/HT		Red Transparent	1.0	7.0	120°
✓ L-924CB/ID	RED HIGH INTENSITY (GaAsP/GaP)	Red Diffused	1.5	5.0	120°
✓ L-924CB/IT		Red Transparent	2.0	14	120°
✓ L-924CB/ED	ORANGE (GaAsP/GaP)	Orange Diffused	1.5	5.0	120°
✓ L-924CB/ET		Orange Trans.	2.0	14	120°
✓ L-924CB/YD	YELLOW (GaAsP/GaP)	Yellow Diffused	1.0	4.0	120°
✓ L-924CB/YT		Yellow Trans.	2.0	12	120°
✓ L-924CB/GD	GREEN (GaP)	Green Diffused	0.5	3.5	120°
✓ L-924CB/GT		Green Trans.	1.0	10	120°
✓ L-924CB/AD	AMBER	Amber Diffused	0.5	2.0	120°
✓ L-924CB/AT		Amber Trans.	1.0	6.0	120°