

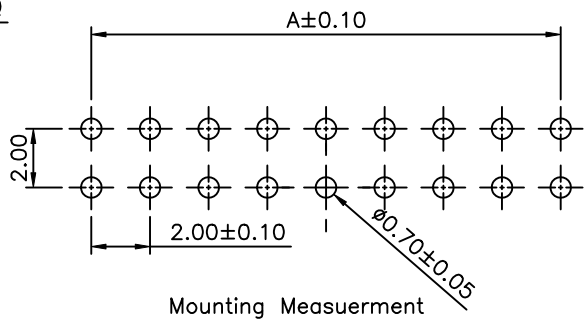
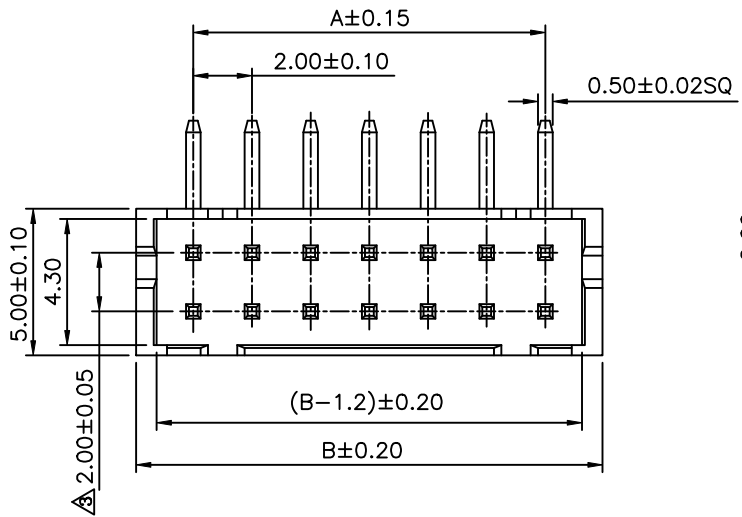


SPECIFICATIONS

Current Rating:2A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:10Milliohms Max
 Insulation Resistance1000Megohms Min
 ⚠ Dielectric Withstanding Voltage:800V AC/Minute
 Operating Temperature:-25°C~+85°C
 Solderability:
 Soldering Temperature:260 ±5 °C
 Soldering Time: 2.5±0.5S
 Continuous Solder Coating With A Min
 95% Coverage
 Contact:Brass,Tin Plated
 ⚠ Insulation:PA66(UL94-0),Beige

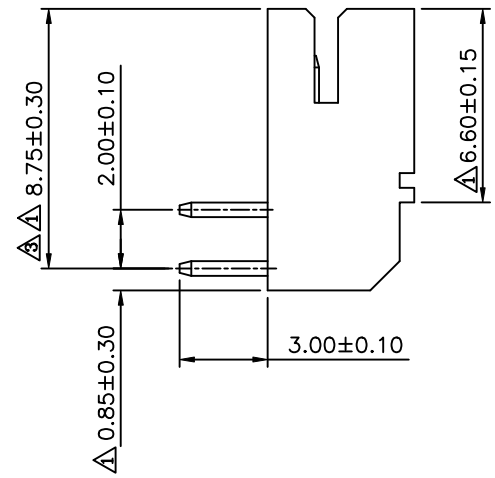

Mounting Measurement

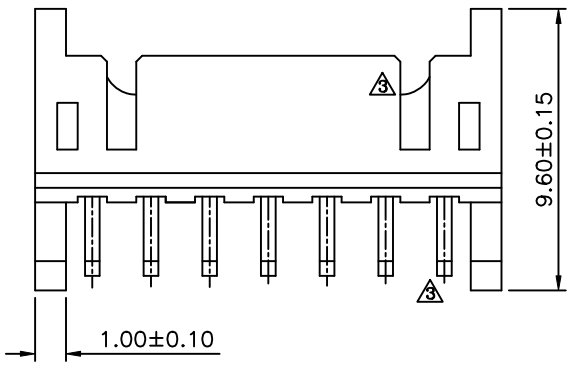

Pin	A	B
6	4.00	7.90
8	6.00	9.90
10	8.00	11.90
12	10.00	13.90
14	12.00	15.90
16	14.00	17.90
18	16.00	19.90
20	18.00	21.90
22	20.00	23.90
24	22.00	25.90
26	24.00	27.90
28	26.00	29.90
30	28.00	31.90
32	30.00	33.90
34	32.00	35.90
36	34.00	37.90
38	36.00	39.90
40	38.00	41.90

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	NO.	REV.	REVISIONS	CHK	DATE
PART No. DFEXXR-BE		MEI							
DRAWING No. DFEXXR-BE		HZF		.X ±0.25	⚠				
SCALE NONE		REV. A3		.XX ±0.15					
				.XXX ±0.05					
				UNIT mm	⊕				