

# GD54/74LS32

## QUADRUPLE 2-INPUT POSITIVE OR GATES


### Description

This device contains four independent 2-input OR gates. It performs the Boolean functions  $Y = \overline{A} \cdot \overline{B}$  or  $Y = A + B$  in positive logic.

### Function Table (each gate)


INPUTS		OUTPUT
A	B	Y
L	L	L
H	L	H
L	H	H
H	H	H

### Pin Configuration

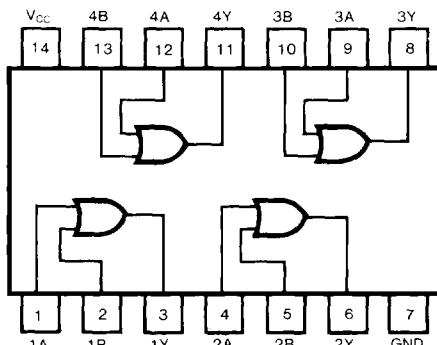

Suffix-Blank: Plastic Dual In Line Package  
 Suffix-J : Ceramic Dual In Line Package

### Circuit Schematics (each gate)

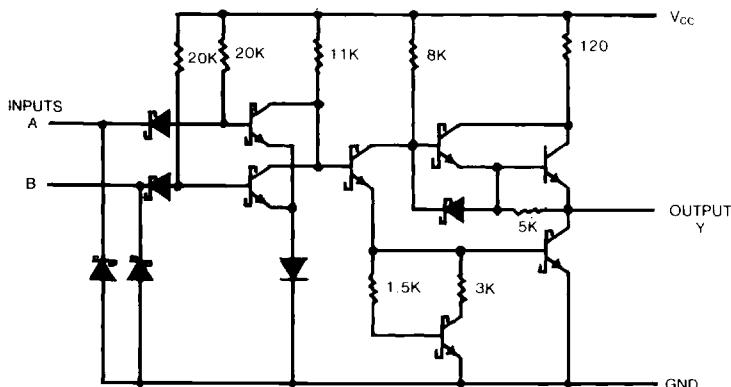

### Absolute Maximum Ratings

- Supply voltage,  $V_{CC}$  ..... 7V
- Input voltage ..... 7V
- Operating free-air temperature range 54LS .....  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$   
74LS .....  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$
- Storage temperature range .....  $-65^{\circ}\text{C}$  to  $150^{\circ}\text{C}$

## Recommended Operating Conditions

SYMBOL	PARAMETER		MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage	54	4.5	5	5.5	V
		74	4.75	5	5.25	
$I_{OH}$	High-level output current	54,74			-400	$\mu A$
		54			4	
$I_{OL}$	Low-level output current	74			8	mA
		54	-55		125	
$T_A$	Operating free-air temperature	74	0		70	$^{\circ}C$
		54				

**Electrical Characteristics** over recommended operating free-air temperature range (unless otherwise noted)

SYMBOL	PARAMETER	TEST CONDITIONS			MIN	TYP (Note 1)	MAX	UNIT
$V_{IH}$	High-level input voltage				2			V
$V_{IL}$	Low-level input voltage				54		0.7	V
					74		0.8	
$V_{IK}$	Input clamp voltage	$V_{CC}=Min, I_i=-18mA$					-1.5	V
$V_{OH}$	High-level output voltage	$V_{CC}=Min$	$V_{IH}=Min$	54	2.5	3.4		V
				74	2.7	3.4		
$V_{OL}$	Low-level output voltage	$V_{CC}=Min$	$I_{OL}=4mA$	54,74	0.25	0.4		V
		$V_{IL}=Max$	$I_{OL}=8mA$	74	0.35	0.5		
$I_I$	Input current at maximum input voltage	$V_{CC}=Max, V_i=7V$					0.1	mA
$I_{IH}$	High-level input current	$V_{CC}=Max, V_i=2.7V$					20	$\mu A$
$I_{IL}$	Low-level input current	$V_{CC}=Max, V_i=0.4V$					-0.4	mA
$I_{OS}$	Short-circuit output current	$V_{CC}=Max$ (Note 2)			-20		-100	mA
$I_{CCH}$	Supply current	Total with outputs high	$V_{CC}=Max$			3.1	6.2	mA
		Total with outputs low	$V_{CC}=Max$			4.9	9.8	mA

Note 1: All typical values are at  $V_{CC}=5V$ ,  $T_A=25^{\circ}C$ .

Note 2: Not more than one output should be shorted at a time, and duration should not exceed one second.

## Switching Characteristics, $V_{CC}=5V$ , $T_A=25^{\circ}C$

SYMBOL	PARAMETER	TEST CONDITION#	MIN	TYP	MAX	UNIT
$t_{PLH}$	Propagation delay time, low-to-high-level output	$C_L=15pF, R_L=2k\Omega$		14	22	ns
$t_{PHL}$	Propagation delay time, high-to-low-level output			14	22	ns

\*For load circuit and voltage waveforms, see page 3-11.