REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

CUSTOMER COPY

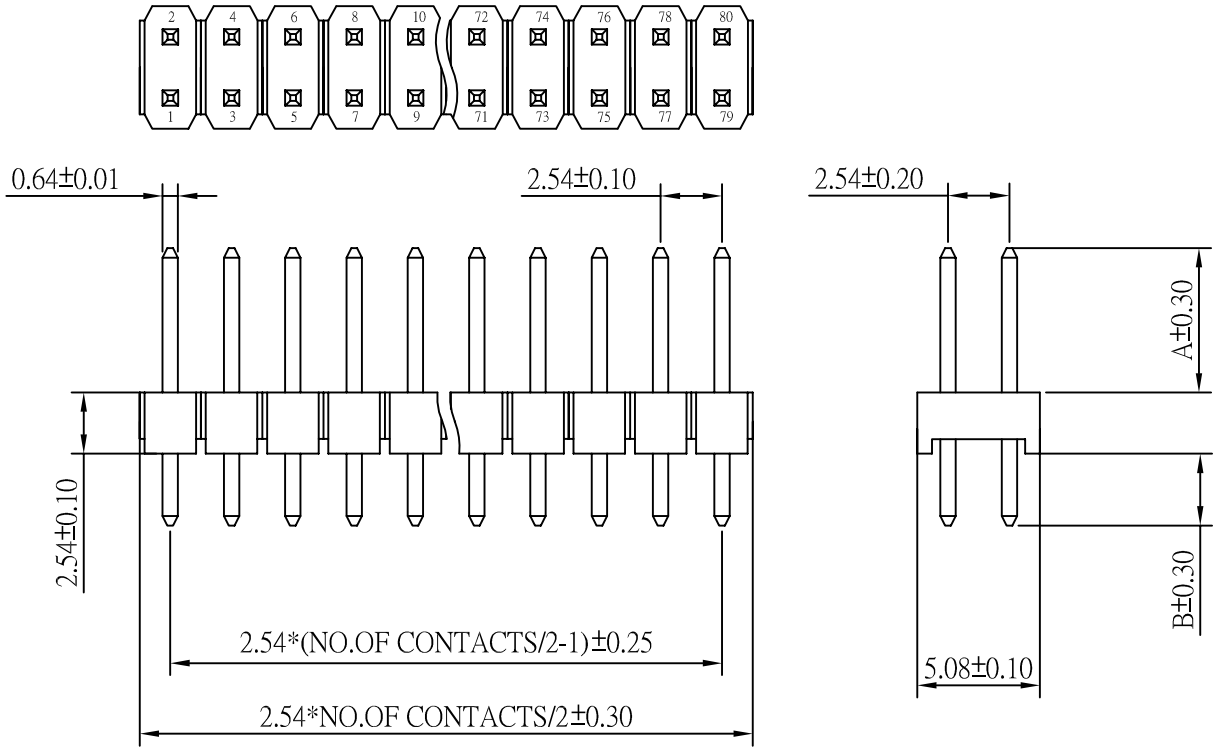

ORDER INFORMATION

184 34 XX XX X

- Plating:
  1: Tin
  3: All Gold
  4: 15 μ"(Gold)
- No. Of Contacts (04 ~ 80)
- Chart
- Type

SPECIFICATION

* Current Rating: 3 A
* Withstanding Voltage: 800 VAC (1 min.)
* Insulation Resistance: 1000 Megohms min.
* Contact Resistance: 30 Milliohms max.
* Operating Temperature: -40˚C to +85˚C
* RETENTION FORCE 750g MIN.

MATERIAL

* Contact: Brass , 0.64mm square post
* Insulator: High temperature plastic
* Plating: Gold

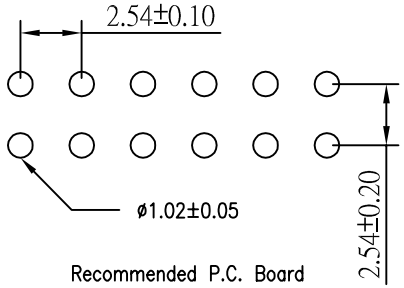

Recommended P.C. Board Hole Layout

Pin Chart

No.	A	B	NC PIN	OTHER
00	6.00	3.00	2	
01	6.00	3.00	4	
02	6.00	3.00	20	
03	6.00	3.00	3	
04	6.00	3.00	9	
05	6.00	3.00	11.12	
06	6.00	3.00	3.4.16	
07	6.00	3.00	3.4	
08	6.00	3.00	2.8	GREEN
09	6.00	3.00	9	GREEN
10	6.00	3.00	8	GREEN
11	6.00	3.00	1	
12	6.00	3.00	7.8	
13	6.00	3.00	15	

No.	A	B	NC PIN	OTHER
14	6.00	3.00	14	
15	6.00	3.00	17.18	
16	6.00	3.00	10	

ACMELUX CO., LTD.
TEL:886-2-85124595 FAX:886-2-85124322

0.0±	SCALE:	TITLE: 2.54X2.54MM (.100"*.100") Pin HEADER Dual Row	PART NO: 111700
0.00±	UNIT: MM		APP BY:
0.000±		MATL:	CHK BY:
		DWG. NO. C18434XXXXX	DR BY: Jack Lin