
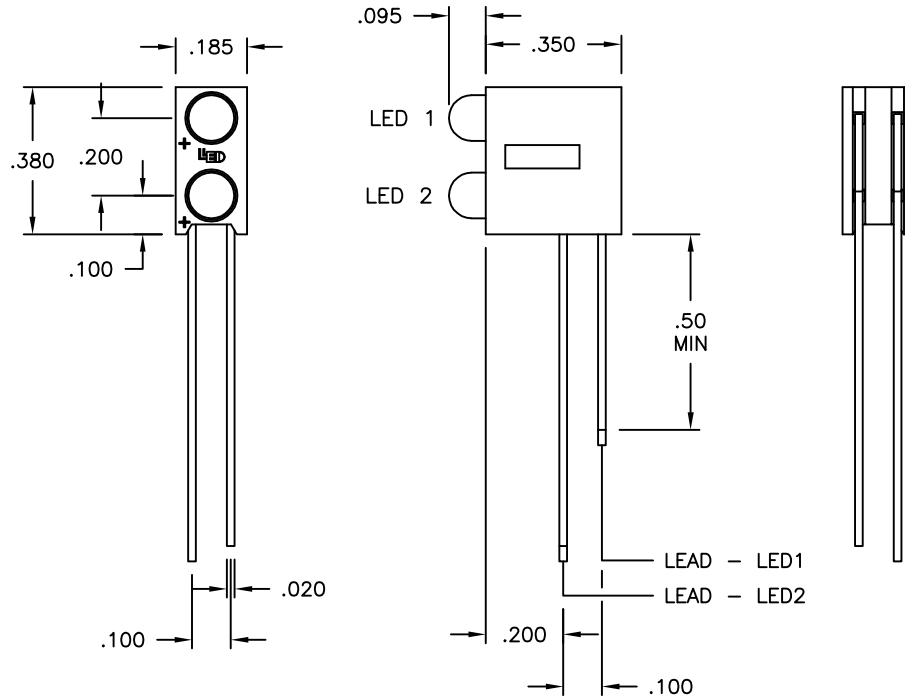


LTR	REVISION	DATE	APPD
-	RELEASED	03-04-97	

Actual Size



NOTES

1. LED SHALL SHOW NO SCRATCHES.
2. LEDS SHALL BE EVEN AND PROTRUDE TO GIVEN DIMENSIONS.
3. TEST FOR COLOR AND POLARITY PER AQL 0.1, MIL-STD-105: ACCEPT=0 REJECT.
4. INSPECT LEADS TO BE PARALLEL AND STRAIGHT PER AQL 0.1, MIL-STD-105: ACCEPT=0 REJECT.
5. INSPECT FOR NO PROTRUSION OR FLASH ON UNDERSIDE OF HOUSING.

COLOR CODE	L.E.D. RADIATION COLOR	ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)				
		If=mA typ/max	Iv mcd min/typ	Vf=V typ/max	Ir max µA	λP nm
R	HI-EFF RED	10/15	1.5/4.0	5/7.5	100	635
Y	YELLOW	10/15	1.5/4.0	5/7.5	100	585
G	HI-EFF GREEN	12/15	1.5/4.0	5/7.5	100	565

<p>LEDTRONICS,™ INC. 4009 PACIFIC COAST HWY TORRANCE, CA 90505</p>	<p align="center">-PROPRIETARY- This document contains Proprietary Information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.</p>		<p align="center">TITLE 21PCT120T3-5V-X/X</p>					
	<p>.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32</p>		DWG NO	SCALE	SHEET	DATE		
	SDPC0192	2:1	1 OF 1	03-04-97	CODE IDENT NO.	DWG BY	CHK BY	QC
8Z410	SMA	03-04-97		GENERIC				