




MBR15HxxCT, MBRF15HxxCT & MBRB15HxxCT Series

New Product


Vishay Semiconductors
formerly General Semiconductor

Dual Schottky Barrier Rectifiers


Reverse Voltage 35 to 60 V
Forward Current 15 A

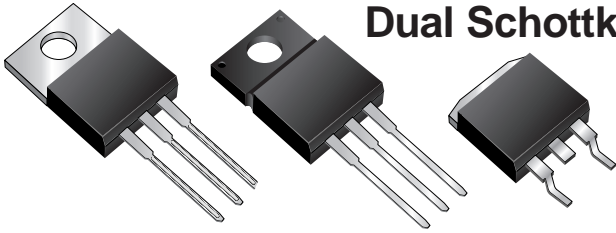


TO-220AB (MBR15HxxCT)

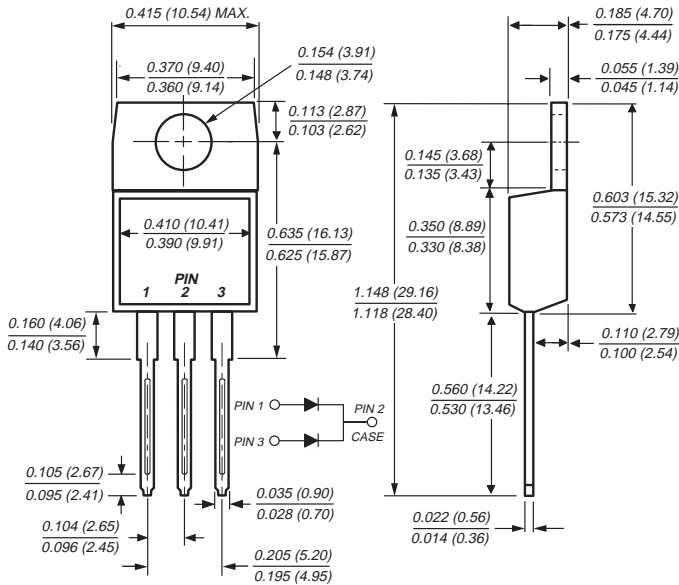


ITO-220AB (MBRF15HxxCT)

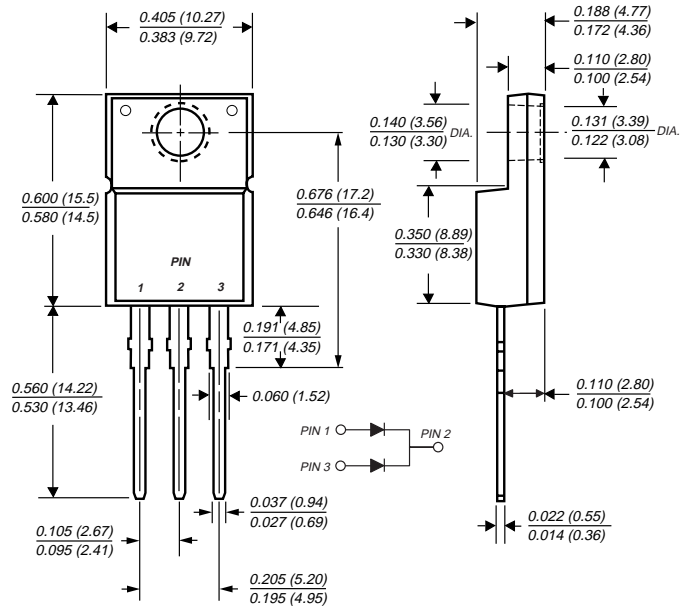

TO-263AB (MBRB15HxxCT)

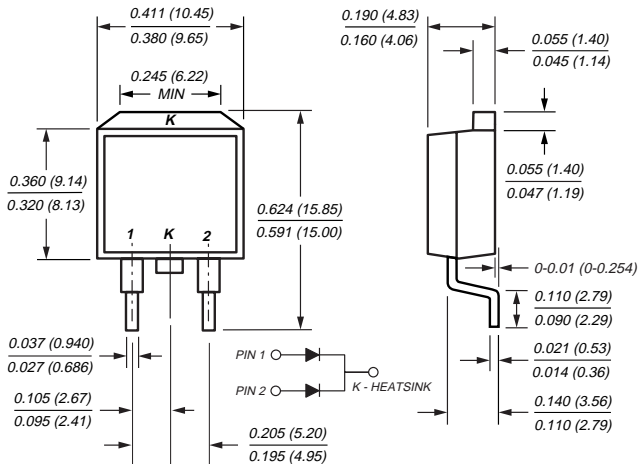

Mounting Pad Layout TO-263AB

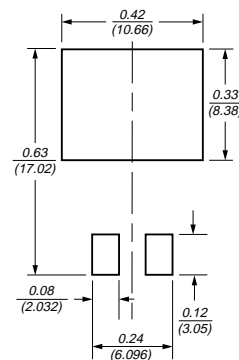

Dimensions in inches and (millimeters)

Mechanical Data

Case: JEDEC TO-220AB, ITO-220AB & TO-263AB molded plastic body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Mounting Torque: 10 in-lbs maximum

Weight: 0.08 oz., 2.24 g

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94 V-0
- Dual rectifier construction, positive center tap
- Metal silicon junction, majority carrier conduction
- Low forward voltage drop, low power loss and high efficiency
- Guardring for overvoltage protection
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 250 °C/10 seconds, 0.25" (6.35 mm) from case
- Rated for reverse surge and ESD
- 175 °C maximum operation junction temperature

MBR15HxxCT, MBRF15HxxCT & MBRB15HxxCT Series



Vishay Semiconductors
formerly General Semiconductor

Maximum Ratings (T_C = 25 °C unless otherwise noted)

Parameter	Symbol	MBR15H35CT	MBR15H45CT	MBR15H50CT	MBR15H60CT	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	35	45	50	60	V
Working peak reverse voltage	V _{RWM}	35	45	50	60	V
Maximum DC blocking voltage	V _{DC}	35	45	50	60	V
Max. average forward rectified current <small>(see figure 1)</small>	<i>Total device</i> I _{F(AV)} <i>Per leg</i>	15 7.5				A
Peak repetitive forward current at T _C = 155 °C per leg <small>(rated V_R, 20 KHz sq. wave)</small>	I _{FRM}	15				A
Non-repetitive avalanche energy per leg <small>at 25 °C, I_{AS} = 4A, L = 10 mH</small>	E _{AS}	80				mJ
Peak forward surge current 8.3 ms single half sine-wave <small>superimposed on rated load (JEDEC Method)</small>	I _{FSM}	150				A
Peak repetitive reverse surge current per leg <small>at t_p = 2.0 μs, 1 KHz</small>	I _{RRM}	1.0		0.5		A
Peak non-repetitive reverse energy (8/20 μs waveform)	E _{RSM}	20		10		mJ
Electrostatic discharge capacitor voltage <small>Human body model: C = 100 F, R = 1.5 kΩ</small>	V _C	25				kV
Voltage rate of change (rated V _R)	dv/dt	10,000				V/μs
Operating junction temperature range	T _J	-65 to +175				°C
Storage temperature range	T _{STG}	-65 to +175				°C
RMS Isolation voltage (MBRF type only) from terminals <small>to heatsink with t = 1.0 second, RH ≤ 30%</small>	V _{ISOL}	4500 ⁽¹⁾ 3500 ⁽²⁾ 1500 ⁽³⁾				V

Electrical Characteristics (T_C = 25 °C unless otherwise noted)

Parameter	Symbol	MBR15H35CT, MBR15H45CT		MBR15H50CT, MBR15H60CT		Unit
		Typ	Max	Typ	Max	
Maximum instantaneous forward voltage per leg ⁽⁴⁾ <small>at I_F = 7.5 A T_J = 25 °C at I_F = 7.5 A T_J = 125 °C at I_F = 15 A T_J = 25 °C at I_F = 15 A T_J = 125 °C</small>	V _F	– 0.50 – 0.61	0.63 0.55 0.75 0.66	– 0.58 – 0.68	0.73 0.61 0.87 0.72	V
Maximum instantaneous reverse current <small>at rated DC blocking voltage per leg⁽⁴⁾</small>	I _R	– 3.0	50 10	– 2.0	50 10	μA mA

Thermal Characteristics (T_C = 25 °C unless otherwise noted)

Parameter	Symbol	MBR	MBRF	MBRB	Unit
Maximum thermal resistance per leg	R _{θJC}	3.0	5.0	3.0	°C/W

Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
 (2) Clip mounting (on case), where leads do overlap heatsink
 (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")
 (4) Pulse test: 300 μs pulse width, 1% duty cycle

Ordering Information

Product	Case	Package Code	Package Option
MBR15H35CT – MBR15H60CT	TO-220AB	45	Anti-Static tube, 50/tube, 2K/carton
MBRF15H35CT – MBRF15H60CT	ITO-220AB	45	Anti-Static tube, 50/tube, 2K/carton
MBRB15H35CT – MBRB15H60CT	TO-263AB	31	13" reel, 800/reel, 4.8K/carton
		45	Anti-Static tube, 50/tube, 2K/carton
		81	Anti-Static 13" reel, 800/reel, 4.8K/carton



Ratings and Characteristic Curves (T_A = 25°C unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

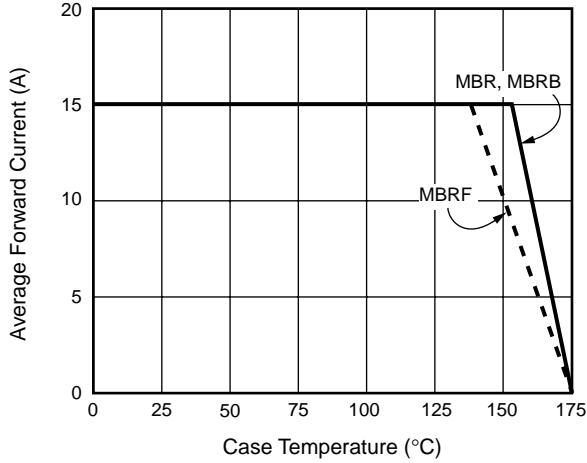


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current Per Leg

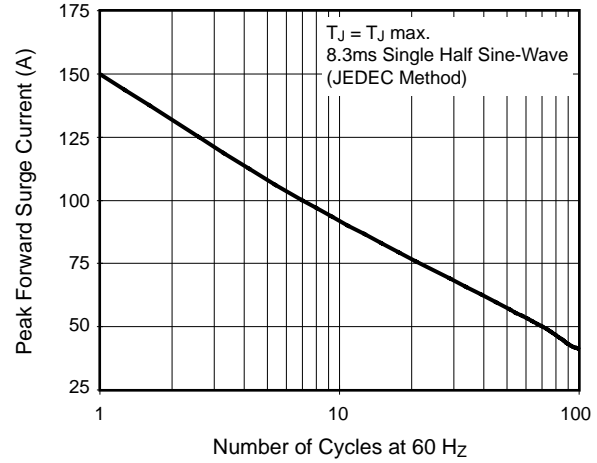


Fig. 3 – Typical Instantaneous Forward Characteristics Per Leg

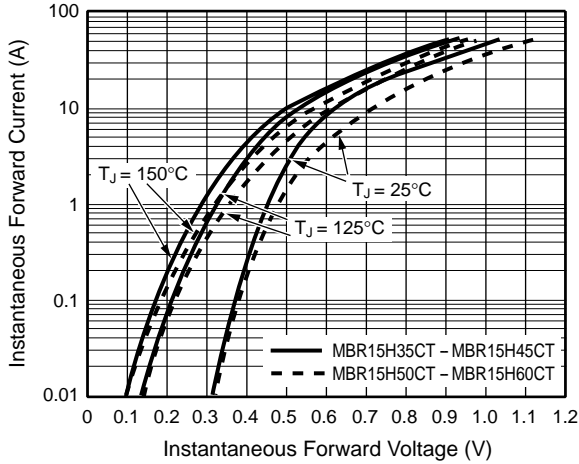


Fig. 4 – Typical Reverse Characteristics Per Leg

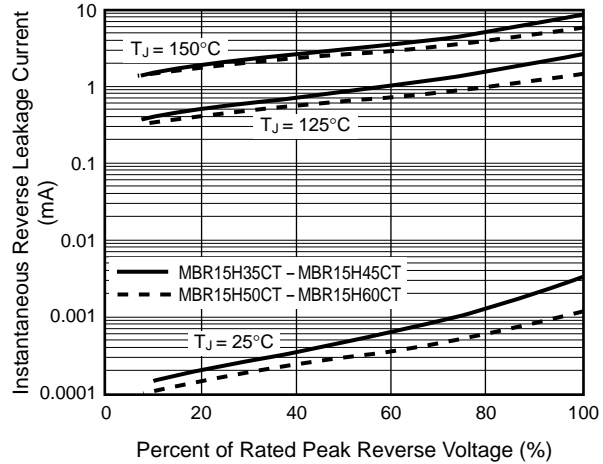


Fig. 5 – Typical Junction Capacitance Per Leg


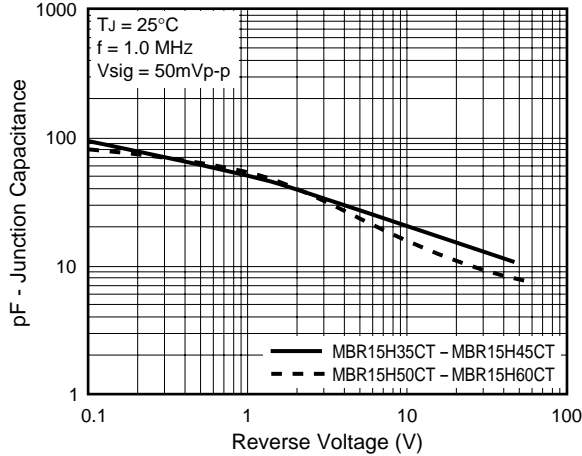


Fig. 6 – Typical Transient Thermal Impedance Per Leg



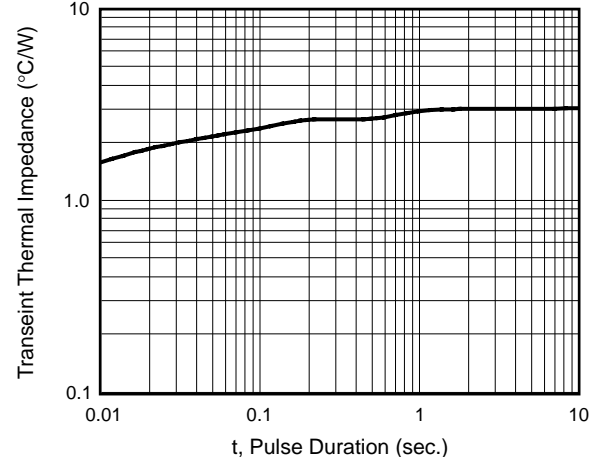

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.